
PVIC®

PVC/PVC, Instrumentation, Shielded
300V, UL Type PLTC/ITC, Individual and Overall Shielded Pairs

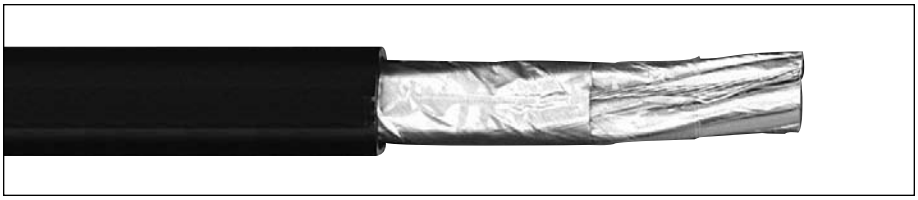

CATALOG NUMBER	NO. OF PAIRS	COND. SIZE (AWG)	COND. STRAND	MINIMUM AVG. INSULATION THICKNESS		MINIMUM AVG. JACKET THICKNESS		NOMINAL CABLE O.D.		COPPER WEIGHT		NET WEIGHT	
				INCHES	mm	INCHES	mm	INCHES	mm	LBS/ 1000FT	kg/km	LBS/ 1000FT	kg/km
INDIVIDUAL AND OVERALL SHIELDED PAIRS 20 AWG CONDUCTORS													
325930	2	20	7/.0121	0.012	0.30	0.040	1.02	0.316	8.03	22	33	46	69
325950	4	20	7/.0121	0.012	0.30	0.042	1.07	0.325	8.26	39	58	76	113
339750	8	20	7/.0121	0.012	0.30	0.050	1.27	0.426	10.82	71	106	148	220
339760*	12	20	7/.0121	0.012	0.30	0.060	1.52	0.640	16.26	83	124	223	332
348110*	16	20	7/.0121	0.012	0.30	0.060	1.52	0.705	17.91	165	246	280	417
339770*	20	20	7/.0121	0.012	0.30	0.060	1.52	0.780	19.81	175	260	339	504
339780*	24	20	7/.0121	0.012	0.30	0.060	1.52	0.845	21.46	209	311	397	591
348120*	36	20	7/.0121	0.012	0.30	0.070	1.78	1.015	25.78	324	482	586	872
341790*	50	20	7/.0121	0.012	0.30	0.070	1.78	1.190	30.23	433	644	786	1170
INDIVIDUAL AND OVERALL SHIELDED PAIRS 18 AWG CONDUCTORS													
325860	2	18	7/.0152	0.015	0.38	0.042	1.07	0.380	9.65	30	45	61	91
325890	4	18	7/.0152	0.015	0.38	0.042	1.07	0.410	10.41	55	82	100	149
348060	8	18	7/.0152	0.015	0.38	0.060	1.52	0.485	12.32	105	156	212	316
348070*	12	18	7/.0152	0.015	0.38	0.060	1.52	0.760	19.30	156	232	315	469
760420*	16	18	7/.0152	0.015	0.38	0.060	1.52	0.845	21.46	207	308	401	597
339800*	20	18	7/.0152	0.015	0.38	0.070	1.78	0.955	24.26	252	375	505	752
339810*	24	18	7/.0152	0.015	0.38	0.070	1.78	1.040	26.42	302	449	596	887
339820*	36	18	7/.0152	0.015	0.38	0.070	1.78	1.215	30.86	452	673	846	1259
339830*	50	18	7/.0152	0.015	0.38	0.080	2.03	1.450	36.83	628	935	1165	1734
INDIVIDUAL AND OVERALL SHIELDED PAIRS 16 AWG CONDUCTORS													
325800	2	16	7/.0192	0.015	0.38	0.042	1.07	0.346	8.79	42	63	80	119
325820	4	16	7/.0192	0.015	0.38	0.053	1.35	0.506	12.85	80	119	151	225
298880	8	16	7/.0192	0.015	0.38	0.060	1.52	0.665	16.89	155	231	288	429
298890	12	16	7/.0192	0.015	0.38	0.060	1.52	0.855	21.72	230	342	435	647
759770*	16	16	7/.0192	0.015	0.38	0.070	1.78	0.970	24.64	306	455	575	856
339840*	20	16	7/.0192	0.015	0.38	0.070	1.78	1.080	27.43	375	558	705	1049
759780*	24	16	7/.0192	0.015	0.38	0.070	1.78	1.165	29.59	456	679	828	1232
339850*	36	16	7/.0192	0.015	0.38	0.080	2.03	1.390	35.31	674	1003	1215	1808
339860*	50	16	7/.0192	0.015	0.38	0.090	2.29	1.655	42.04	935	1391	1670	2485

Dimensions and weights are nominal; subject to industry tolerances.
* Non-stock item; minimum runs apply. Please consult Customer Service for price and delivery.

Product Construction:

Conductor:
- 20 AWG thru 16 AWG bare, annealed copper per ASTM B3
- Class B stranding per ASTM B8

Insulation:
- Lead-free Polyvinyl Chloride (PVC)
- Color-coded per ICEA Method 1: Pairs - black and white. One conductor in each pair is printed alpha-numerically for easy identification

Shield:
Individual and overall shielded pairs
- Individual pairs are 100% shielded with Flexfoil® aluminum/polyester in contact with stranded tinned copper drain wire
- Overall shield is Flexfoil® aluminum/polyester in contact with stranded tinned copper drain wire

Jacket:
- Lead-free, sunlight-resistant Polyvinyl Chloride (PVC)

Print:
- GENERAL CABLE® (PLANT OF MFG) PVIC XX/ SPS XXAWG PVC/PVC SHIELDED (UL) TYPE PLTC OR ITC 105°C SUN RES MONTH/YEAR OF MFG SEQUENTIAL FOOTAGE MARK

Options:
- Tinned copper conductor
- Class C stranding
- Other constructions available upon request

Applications:
- In free air and raceways in accordance with NEC
- Typical applications include audio, intercom, control, energy management and alarm circuits
- In ducts, cable trays or conduit
- In accordance with UL Subject 13 as Power-Limited Circuit Cable
- In Class 3 circuits in accordance with NEC Article 725
- In accordance with UL Subject 2250 as Instrumentation Tray Cable (ITC)
- Permitted for use in Class I, Division 2 industrial hazardous locations per NEC Article 501-4(b) for UL Type PLTC/ITC cables
- Per NEC Article 727 for Type PLTC/ITC

Features:
- Rated at 105°C
- Good electrical properties
- Oil- and sunlight-resistant
- Flame-retardant
- Good mechanical properties
- Meets cold bend test at -25°C

Compliances:
Industry Compliances:
- UL Type PLTC/ITC, UL File # E36118
- RoHS Compliant

Flame Test Compliances:
- IEEE 383 (70,000 BTU/hr)
- UL Subject 13 (70,000 BTU/hr) for PLTC
- UL Subject 2250 (70,000 BTU/hr) for ITC

Other Compliances:
- EPA 40 CFR, Part 261 for leachable lead content per TCLP method
- OSHA Acceptable

Packaging:
- Material cut to length and shipped on non-returnable wood reels

UL LISTED

RoHS Compliant Directive 2002/95/EC

General Cable
Phone: 888-593-3355
www.generalcable.com