
Arctic-Flex®

XLPE/ARCTIC-PVC, Control, Unshielded
600V, UL Type TC-ER[1], CSA Type RW90 XLPE, CSA Type TC

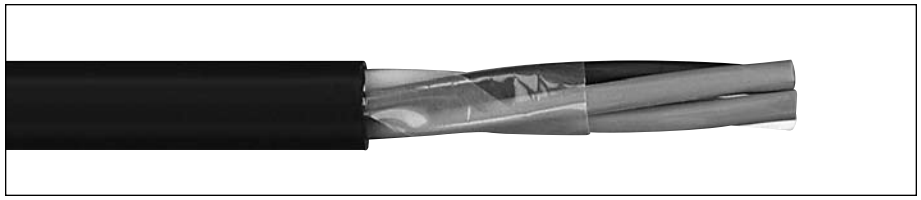

CATALOG NUMBER	NO. OF COND.	COND. SIZE (AWG)	COND. STRAND	MINIMUM AVG. INSULATION THICKNESS		MINIMUM AVG. JACKET THICKNESS		NOMINAL CABLE O.D.		COPPER WEIGHT		NET WEIGHT	
				INCHES	mm	INCHES	mm	INCHES	mm	LBS/ 1000 FT	kg/km	LBS/ 1000 FT	kg/km
14 AWG MULTI CONDUCTORS													
347340*	2	14	7/.0242	0.030	0.76	0.045	1.14	0.405	10.29	25	37	71	106
347350*	3	14	7/.0242	0.030	0.76	0.045	1.14	0.390	9.91	40	59	90	134
347360*	4	14	7/.0242	0.030	0.76	0.045	1.14	0.425	10.80	53	79	113	168
347370*	5	14	7/.0242	0.030	0.76	0.045	1.14	0.465	11.81	66	99	140	208
347380*	7	14	7/.0242	0.030	0.76	0.045	1.14	0.590	14.99	93	138	176	262
347390*	9	14	7/.0242	0.030	0.76	0.060	1.52	0.620	15.75	119	177	245	365
347400*	12	14	7/.0242	0.030	0.76	0.060	1.52	0.680	17.27	159	237	302	449
347410*	19	14	7/.0242	0.030	0.76	0.060	1.52	0.800	20.32	252	375	460	685
347420*	25	14	7/.0242	0.030	0.76	0.060	1.52	0.985	25.02	323	481	641	954
347430*	30	14	7/.0242	0.030	0.76	0.080	2.03	1.050	26.67	387	576	740	1101
347440*	37	14	7/.0242	0.030	0.76	0.080	2.03	1.130	28.70	490	729	888	1322
12 AWG MULTI CONDUCTORS													
347450*	2	12	7/.0305	0.030	0.76	0.045	1.14	0.410	10.41	41	61	96	143
347460*	3	12	7/.0305	0.030	0.76	0.045	1.14	0.435	11.05	65	96	125	186
347470*	4	12	7/.0305	0.030	0.76	0.045	1.14	0.475	12.07	86	128	157	234
347480*	5	12	7/.0305	0.030	0.76	0.045	1.14	0.520	13.21	108	160	191	284
347490*	7	12	7/.0305	0.030	0.76	0.060	1.52	0.595	15.11	150	224	260	387
347500*	9	12	7/.0305	0.030	0.76	0.060	1.52	0.695	17.65	193	288	340	506
347510*	12	12	7/.0305	0.030	0.76	0.060	1.52	0.780	19.81	258	385	429	638
347520*	19	12	7/.0305	0.030	0.76	0.080	2.03	0.930	23.62	403	600	681	1013
347530*	25	12	7/.0305	0.030	0.76	0.080	2.03	1.095	27.81	515	767	885	1317
347540*	30	12	7/.0305	0.030	0.76	0.080	2.03	1.150	29.21	618	920	1005	1496
347550*	37	12	7/.0305	0.030	0.76	0.080	2.03	1.240	31.50	741	1103	1185	1764
10 AWG MULTI CONDUCTORS													
347560*	2	10	7/.0385	0.030	0.76	0.045	1.14	0.455	11.56	67	100	130	193
347570*	3	10	7/.0385	0.030	0.76	0.045	1.14	0.485	12.32	101	150	168	250
347580*	4	10	7/.0385	0.030	0.76	0.060	1.52	0.515	13.08	135	200	229	341
347590*	5	10	7/.0385	0.030	0.76	0.060	1.52	0.615	15.62	167	249	281	418
347600*	7	10	7/.0385	0.030	0.76	0.060	1.52	0.670	17.02	234	349	377	561
347610*	9	10	7/.0385	0.030	0.76	0.060	1.52	0.785	19.94	295	440	479	713
347620*	12	10	7/.0385	0.030	0.76	0.080	2.03	0.895	22.73	402	598	644	958

Dimensions and weights are nominal; subject to industry tolerances.
* Non-stock item; minimum runs apply. Please consult Customer Service for price and delivery.
[1] Approved as TYPE TC-ER for Exposed Run applications of 3 or more conductors as defined by NEC.

Product Construction:

Conductor:
- 14 AWG thru 10 AWG tinned, annealed copper per ASTM B3
- Class B stranding per ASTM B8

Insulation:
- Lead-free, flame-retardant Cross-Linked Polyethylene (XLPE)
- Color-coded per CSA Standard C22.2 No. 38 as follows:

Number of color coding of circuit conductors

No. of Cond.	Color Code
2	blk, wht
3	blk, red, blu
4	blk, red, blu, wht
≥5	all black

All conductors for all constructions are alpha-numeric printed

Jacket:
- Lead-free, flame-retardant, sunlight-resistant Arctic-grade Polyvinyl Chloride (PVC)

Print:
- GENERAL CABLE® (PLANT OF MFG) (UL) TYPE TC-ER[1] ARCTIC-FLEX® XX/C XXAWG FR-XLP/ PVC XHHW-2 CDRS 90C WET OR DRY SUN RES DIR BUR 600V - (CSA) TYPE RW90 XLPE -40C TC FT4 600V PLUS DAY/MONTH/YEAR OF MFG SEQUENTIAL FOOTAGE MARK

Options:
- Bare copper, class C stranding
- Uninsulated ground (bonding) conductor
- Optional color code as specified per CSA standard C22.2 No. 38 for two to four conductor cable
- Non-UL 1000 volt CSA Type RW90 XLPE, CSA Type TC
- Other constructions available upon request

Applications:
- Industrial lighting, control and signaling circuits
- Approved for direct burial, Class I, Div. 2 industrial hazardous locations per NEC for UL Type TC cables. In Canada, protection may be required by inspection authority per Canadian electrical code
- Permitted for Exposed Run (ER) use in accordance with NEC for 3 or more conductors
- Approved for cable in tray; industrial hazardous locations; Class I, Zone 2; and Class II, Division 2 per CEC Rules 18-152 and 18-252 when used with certified HL glands

Features:
- Rated 90°C wet or dry
- Ripcord applied to all cables with jacket thickness of 60 mils or less
- Meets CSA cold impact test at -40°C
- Meets ICEA and CSA cold bend test at -60°C
- Meets the crush and impact requirements of Type MC cable

Compliances:

Industry Compliances:
- ICEA S-73-532
- ICEA S-95-658/NEMA WC70
- UL 44 Type XHHW-2
- UL 1277 Type TC-ER for 3 or more conductors, UL File # E57179
- UL 1581
- CSA C22.2 No. 38 XLPE RW90
- CSA C22.2 No. 230 Type TC

Flame Test Compliances:
- UL 1581 VW-1
- UL 1277
- IEEE 383
- CSA FT4

Other Compliances:
- EPA 40 CFR, Part 261 for leachable lead content per TCLP
- OSHA Acceptable

Packaging:
- Material cut to lengths and shipped on non-returnable wood reels

UL LISTED

Canadian Standard Association

General Cable

Phone: 888-593-3355
www.generalcable.com