
DuraSheath®

EPR/XL-CPE, Low-Voltage Power, Unshielded 600 V, UL Type RHH/RHW-2/USE-2

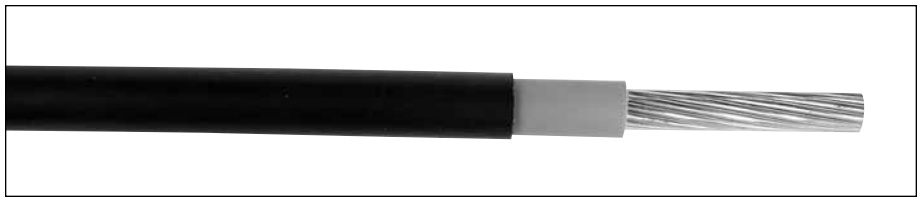

Product Construction:

Conductor:
- 14 AWG thru 1000 kcmil tin-coated copper compressed Class B stranding per ASTM B33 and B8

Insulation:
- Lead-free, Ethylene Propylene Rubber (EPR) colored to contrast with black lead-free Cross-Linked Chlorinated Polyethylene (XL-CPE) jacket

Print:
For 1 AWG and smaller:
- GENERAL CABLE® MI DURASHEATH® TYPE USE-2 OR RHH OR RHW-2 VW-1 (AWG SIZE) (MM SIZE) EP 600 VOLTS SUN RES UL ROHS MONTH/YEAR OF MFG SEQUENTIAL FOOTAGE MARK

For 1/0 AWG and larger:
- GENERAL CABLE® MI DURASHEATH® LL TYPE USE-2 OR RHH OR RHW-2 VW-1 (AWG SIZE) (MM SIZE) EP 600 VOLTS SUN RES FOR CT USE UL ROHS MONTH/YEAR OF MFG SEQUENTIAL FOOTAGE MARK

Options:
- Colored jackets available upon request
- 2000 V rated cables

Applications:
- Ideally suited for use in a broad range of commercial, industrial and utility applications where reliability is a major concern and where maximum performance will be demanded
- In free air, raceways or direct burial
- For use in aerial, conduit, open tray and underground duct/installations

Features:
- Rated at 90˚C wet or dry
- Deformation-resistant at high temperatures
- Excellent moisture resistance, exceeds UL 44
- Stable electrical properties over a broad temperature range
- Excellent flexibility at low temperatures; suitable for installation in sub-zero conditions
- Extra-tough, mechanically rugged composite insulation and jacket construction
- Resistant to most oils and chemicals
- UV/sunlight-resistant
- Meets UL 44 cold bend test at -40˚C

Compliances:
Industry Compliances:
- National Electric Code (NEC)
- ICEA S-95-658/NEMA WC70
- "FOR CT USE" on 1/0 AWG and larger in accordance with the NEC
- UL 44 Type RHH/RHW-2, UL File # E90494
- UL 854 Type USE-2, UL File # E90499

Flame Test Compliances:
- UL 1581 VW-1
- IEEE 1202/CSA FT4

Optional Flame Tests:
See General Cable Sales Representative

Other Compliances:
- EPA 40 CFR, Part 261 for leachable lead content per TCLP
- OSHA Acceptable
- RoHS Compliant

Packaging:
- Material cut to length and shipped on non-returnable wood reels

CATALOG NUMBER	COND. SIZE (AWG/ kcmil)	COND. STRAND	NOMINAL COND. DIAMETER		MINIMUM AVG. INSULATION THICKNESS		MINIMUM AVG. INSULATION DIAMETER		MINIMUM AVG. JACKET THICKNESS		MINIMUM AVG. JACKET DIAMETER		COPPER WEIGHT		NET WEIGHT	
			INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	LBS/ 1000 FT	kg/ km	LBS/ 1000 FT	kg/ km
14 AWG - 1000 kcmil CONDUCTORS																
14511.411400	14	7/.0242	0.07	1.78	0.030	0.76	0.14	3.56	0.015	0.38	0.17	4.32	13	19	24	36
14511.411200	12	7/.0305	0.09	2.29	0.030	0.76	0.16	4.06	0.015	0.38	0.19	4.83	20	30	33	49
14511.411000	10	7/.0385	0.12	3.05	0.030	0.76	0.18	4.57	0.015	0.38	0.21	5.33	32	48	48	71
14511.410800	8	7/.0486	0.15	3.81	0.045	1.14	0.24	6.10	0.015	0.38	0.28	7.11	50	75	77	115
14511.410600	6	7/.0612	0.18	4.57	0.045	1.14	0.28	7.11	0.030	0.76	0.35	8.89	81	121	122	182
14511.410400	4	7/.0772	0.23	5.84	0.045	1.14	0.33	8.38	0.030	0.76	0.39	9.91	129	192	178	265
14511.710200	2	7/.0974	0.29	7.37	0.045	1.14	0.39	9.91	0.030	0.76	0.46	11.68	205	305	265	394
14511.715100	1/0	19/.0740	0.37	9.40	0.055	1.40	0.48	12.19	0.045	1.14	0.58	14.73	326	485	422	628
14511.715200	2/0	19/.0837	0.41	10.41	0.055	1.40	0.53	13.46	0.045	1.14	0.63	16.00	411	612	518	771
14511.715400	4/0	19/.1055	0.52	13.21	0.055	1.40	0.64	16.26	0.045	1.14	0.74	18.80	653	972	785	1168
14511.716000	250	37/.0822	0.56	14.22	0.065	1.65	0.70	17.78	0.065	1.65	0.85	21.59	772	1149	960	1429
14511.716200	350	37/.0973	0.67	17.02	0.065	1.65	0.81	20.57	0.065	1.65	0.96	24.38	1081	1609	1299	1933
14511.716500	500	37/.1162	0.80	20.32	0.065	1.65	0.94	23.88	0.065	1.65	1.09	27.69	1542	2295	1803	2683
14511.717000	750	61/.1109	0.98	24.89	0.080	2.03	1.15	29.21	0.065	1.65	1.31	33.27	2316	3447	2664	3965
14511.717500	1000	61/.1280	1.13	28.70	0.080	2.03	1.31	33.27	0.065	1.65	1.46	37.08	3806	5664	3989	5936

Dimensions and weights are nominal; subject to industry tolerances.

UL LISTED

RoHS Compliant Directive 2002/95/EC

General Cable
Phone: 888-593-3355
www.generalcable.com