XHHW-2

XLPE, Low-Voltage Power, 600 V
UL Type XHHW-2, c(UL) RW90, Single Conductor, Copper

Product Construction:


Conductor:
- 14 AWG thru 750 kcmil annealed bare copper per ASTM B3
- Class B stranding per ASTM B8

Insulation:
- Flame-retardant Cross-linked Polyethylene (XLPE)

Print:
- GENERAL CABLE® (PLANT OF MFG) AWG/KCMIL TYPE XHHW-2 (UL) TYPE RW90 C(UL) 600V MONTH/YEAR OF MFG SEQUENTIAL FOOTAGE MARK

Options:
- Tinned copper conductor
- Full colored insulation

Applications:
- General purpose building wire for use primarily in conduit or other recognized raceways as specified in the National Electrical Code
- Industrial environments where superior insulation toughness and chemical resistance are required
- Maximum operating temperature not to exceed 90˚C in dry or wet locations

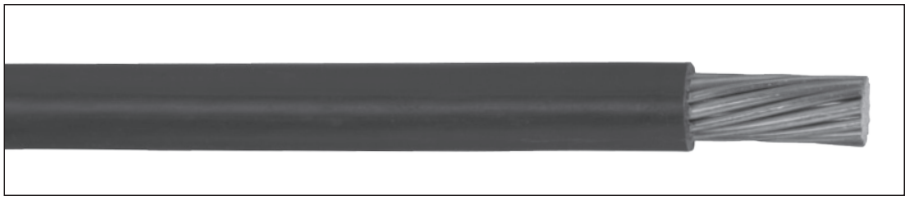

Features:
- Rated at 90˚C wet or dry
- Smaller cable O.D.
- Excellent electrical, thermal and physical properties
- Excellent resistance to moisture
- Excellent resistance to crush, compression cuts and heat deformation

Compliances:
- National Electric Code (NEC)
- UL 44 Standard for Rubber Insulated Wire and Cable
- ICEA S-95-658/NEMA WC70
- UL Listed as Type XHHW-2, UL File # E90494
- c(UL) Type RW90
- OSHA Acceptable

Packaging:
- Material cut to length and shipped on non-returnable wood reels

CATALOG NUMBER	COND. SIZE (AWG/ kcmil)	COND. STRAND	NOMINAL COND. DIAMETER		MINIMUM AVG. INSULATION THICKNESS		NOMINAL CABLE O.D.		COPPER WEIGHT		NET WEIGHT		AMPACITY (1)		
			INCHES	mm	INCHES	mm	INCHES	mm	LBS/ 1000 FT	kg/km	LBS/ 1000 FT	kg/km	60°C	75°C	90°C
14 AWG - 750 kcmil CONDUCTORS															
391070	14	7/.0240	0.07	1.80	0.030	0.76	0.13	3.38	12	18	17	25	15	15	15
391080	12	7/.0305	0.09	2.26	0.030	0.76	0.15	3.84	20	30	26	39	20	20	20
391090	10	7/.0385	0.11	2.87	0.030	0.76	0.18	4.57	32	48	38	57	30	30	30
798751	8	7/.0486	0.14	3.56	0.045	1.14	0.24	6.10	51	76	65	97	40	50	55
496517	6	7/.0612	0.18	4.57	0.045	1.14	0.28	7.11	81	121	99	147	55	65	75
358172	4	7/.0772	0.23	5.84	0.045	1.14	0.33	8.38	129	192	152	226	70	85	95
760698	2	7/.0974	0.29	7.37	0.045	1.14	0.39	9.91	205	305	233	347	95	115	130
769641	1	19/.0664	0.32	8.13	0.055	1.40	0.44	11.18	256	381	293	437	110	130	145
288411	1/0	19/.0740	0.36	9.14	0.055	1.40	0.48	12.19	326	485	364	572	125	150	170
629439	2/0	19/.0837	0.41	10.41	0.055	1.40	0.53	13.46	411	612	453	674	145	175	195
687473	3/0	19/.0940	0.46	11.68	0.055	1.40	0.58	14.73	518	772	565	842	165	200	225
321736	4/0	19/.1055	0.51	12.95	0.055	1.40	0.63	16.00	653	972	706	1051	195	230	260
309824	250	37/.0822	0.56	14.22	0.065	1.65	0.70	17.78	722	1074	837	1246	215	255	290
935802	350	37/.0973	0.66	16.76	0.065	1.65	0.80	20.32	1081	1609	1157	1722	260	310	350
840671	400	37/.1040	0.73	18.54	0.065	1.65	0.87	22.10	1235	1838	1322	1967	280	335	380
592915	500	37/.1162	0.79	20.07	0.065	1.65	0.93	23.62	1544	2298	1634	2432	320	380	430
369093	600	61/.1109	0.87	22.10	0.080	2.03	1.04	26.42	1853	2758	1972	2935	350	420	475
878916	750	61/.1280	0.98	24.89	0.080	2.03	1.15	29.21	2316	3447	2448	3643	400	475	535

Dimensions and weights are nominal; subject to industry tolerances.

(1) Allowable ampacities shown are for general use as specified by the National Electric Code, 2011 Edition, section 310.15(B)(16). Adjustments and corrections may apply:
60°C – When terminated to equipment for circuits rated 100 amperes or less or marked for 14 through 1 AWG conductors.
75°C – When terminated to equipment for circuits rated over 100 amperes or marked for conductors larger than 1 AWG.
90°C – Wet or dry locations. For ampacity derating purposes.
Dwelling – For dwelling units, conductors shall be permitted as listed ampacities at 120/240-volt, 3-wire, single-phase services and feeders.

General Cable
Phone: 888-593-3355
www.generalcable.com

c UL LISTED