
Uniblend® LF EPR/Copper Tape Shield with Overall PVC Jacket
Medium-Voltage Power, Shielded, 5 kV and 8 kV, UL Type MV-105
133%/100% Ins. Levels, 115 Mils, Three Conductor

Ease of Installation LOW FRICTION Reliable Performance

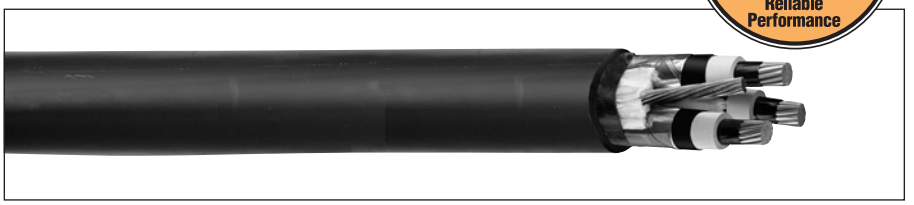

Product Construction:

Conductor:
- 6 AWG thru 1000 kcmil annealed bare copper compact Class B strand

Extruded Strand Shield (ESS):
- Extruded thermoset semi-conducting stress-control layer over conductor

Insulation:
- Ethylene Propylene Rubber (EPR) insulation, colored to contrast with the black conducting shield layers

Extruded Insulation Shield (EIS):
- Thermoset semi-conducting polymeric layer free stripping from insulation

Metallic Shield:
- 5 mil annealed copper tape with an overlap of 25%

Grounding Conductor:
- 1 bare grounding conductor may be in contact with metallic shielding tape

Overall Jacket:
- Low-friction, lead-free, flame-retardant, moisture- and sunlight-resistant Polyvinyl Chloride (PVC)

Print:
- GENERAL CABLE® (PLANT OF MFG) (MO/ YR OF MANUFACTURE) LIGHTNING BOLT SYMBOL 3/C SIZE (AWG OR KCMIL) COMPACT CU UNIBLEND® LF PVC JKT (INSULATION THICKNESS) EPR TYPE MV-105 (VOLTAGE) KV% INSULATION LEVEL DIR BUR SUN RES FOR CT USE (UL) SEQUENTIAL FOOTAGE MARK

Options:
- STRANDFILL® – blocked conductor. Tested in accordance with ICEA T-31-610
- 3 bare copper ground wires
- Covered ground wires

Applications:
- Suited for use in a broad range of commercial, industrial and utility applications, where reliability is the major concern, space is limited and ease of installation is critical
- In wet or dry locations when installed in accordance with NEC
- In aerial, direct burial, conduit, open tray and underground duct installations

Features:
- Rated at 105˚C
- Lower coefficient of friction for ease of installation
- Excellent heat and moisture resistance
- Outstanding corona resistance
- Flexibility for easy handling
- High dielectric strength
- Low moisture absorption
- Electrical stability under stress
- Low dielectric loss
- Chemical-resistant
- Meets cold bend test at -35˚C

Compliances:
- National Electrical Code (NEC)
- UL 1072
- ICEA S-93-639/NEMA WC74
- ICEA S-97-682
- AEIC CS8
- UL listed as Type MV-105 for use in accordance with NEC, UL File # E90501
- UL 1685 (70,000 BTU/hr)
- EPA 40 CFR, Part 261 for leachable lead content per TCLP method
- OSHA Acceptable

Optional Flame Tests:
- IEEE 1202 (70,000 BTU/hr)/CSA FT4
- ICEA T-29-520 (210,000 BTU/hr)

Packaging:
- Material cut to length and shipped on non-returnable wood reels. Lengths in excess of 10,000 lbs. are provided on returnable steel reels that require a deposit
- Extra charges apply for cuts less than 1000 ft., lagging, pulling eyes, paralleling and plexing

CATALOG NUMBER	COND. SIZE (AWG/ kcmil)	NOMINAL CONDUCTOR DIAMETER	INSULATION DIAMETER INCHES		GROUND WIRE (AWG)	NOMINAL OVERALL JKT. THICKNESS		NOMINAL CABLE DIAMETER		NOMINAL CABLE WEIGHT		COPPER WEIGHT		AMPACITY	
		INCHES	MIN.	MAX.		INCHES	mm	INCHES	mm	LBS/1000 FT	kg/km	LBS/1000 FT	kg/km	CONDUIT IN AIR (1)	UNDERGROUND DUCT (2)
5 kV AND 8 kV, UL TYPE MV-105, 133%/100% INS. LEVELS, 115 MILS, THREE CONDUCTOR															
15493.400605	6	0.17	0.415	0.490	6	0.080	2.03	1.29	32.77	939	1397	460	685	92	95
15493.400405	4	0.22	0.455	0.535	6	0.080	2.03	1.39	35.31	1158	1723	616	917	120	125
15493.400205	2	0.27	0.510	0.590	6	0.080	2.03	1.51	38.35	1511	2249	860	1279	165	160
15493.405105	1/0	0.34	0.580	0.655	4	0.080	2.03	1.67	42.42	2030	3021	1290	1919	215	210
15493.405205	2/0	0.38	0.620	0.695	4	0.080	2.03	1.82	46.23	2449	3645	1556	2315	245	235
15493.405405	4/0	0.48	0.720	0.795	3	0.110	2.79	2.07	52.58	3438	5116	2344	3488	320	305
15493.406005*	250	0.53	0.770	0.850	2	0.110	2.79	2.15	54.61	3968	5904	2759	4105	350	335
15493.406205	350	0.62	0.870	0.945	2	0.110	2.79	2.36	59.94	5009	7454	3713	5525	430	400
15493.406505	500	0.74	0.990	1.065	1	0.110	2.79	2.64	67.06	6793	10065	5191	7724	525	485
15493.407005*	750	0.91	1.170	1.250	1/0	0.140	3.56	3.14	79.76	9833	14633	7629	11352	635	585
15493.407505*	1000	1.06	1.320	1.400	2/0	0.140	3.56	3.48	88.39	12601	18753	10070	14985	725	660

Dimensions and weights are nominal; subject to industry tolerances.

* Non-stock item; minimum runs apply. Please consult Customer Service for price and delivery.

(1) Ampacities are in accordance with Table 310.60(C)(75) of the NEC for three conductor copper cable in isolated conduit in air, based on a conductor temperature of 105˚C (221˚F) and an ambient air temperature of 40˚C (104˚F).

(2) Ampacities are in accordance with Table 310.60(C)(79) of the NEC for three conductor copper cable in underground ducts (three conductors per duct), based on a conductor temperature of 105˚C (221˚F) and an ambient earth temperature of 20˚C (68˚F), electrical duct arrangement per Figure 310.60 Detail 1, 100% load factor, and earth thermal resistance (rho) of 90.

Note: a) All sizes are “FOR CT USE”.
b) The NESC Lightning bolt symbol is on all Uniblend® constructions.

General Cable
Phone: 888-593-3355
www.generalcable.com

UL® LISTED