

PVC/PVC, 300V Type PLTC/ITC, Pairs and Triads Series E1AC



Series E1ACD - Pairs

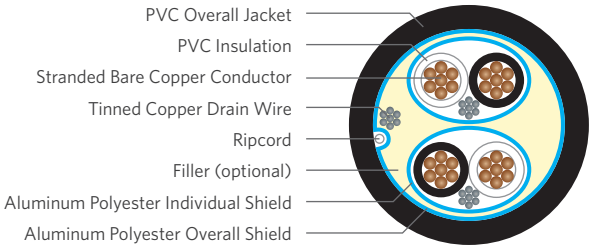

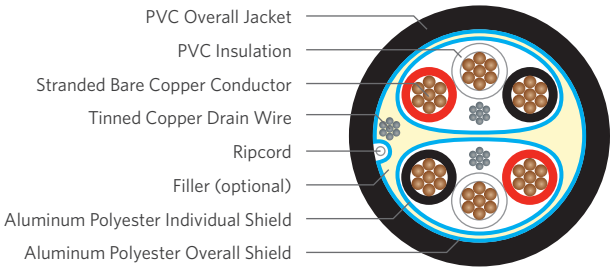

Series E1ACD - Triads

PRODUCT DESCRIPTION

The Superior Essex PVC/PVC, 300V Type PLTC/ITC Cables consist of fully annealed bare copper, Class B stranded conductors (in pairs or triads), covered with Polyvinyl Chloride (PVC) insulation, overall and/or individually shielded and black PVC jacket. These cables are used in control systems, audio, intercom, alarm circuits and energy management.

APPLICATIONS

- In free air, ducts, cable trays, conduit and raceways
- Approved for Class I Div. 2 industrial hazardous locations per NEC

FEATURES

- Rated at 105°C
- Ripcord (for jackets with thicknesses of 60-mils or less)
- Excellent sunlight resistance
- Meets cold bend test at -20°C
- Pair/Triad ID marking system
- Multiple shielding options available including individual, overall, or individual and overall

SPECIFICATIONS

Conductor Count	Available in 1-pair through 50 pairs, and 1-triad through 24 triads
Conductor	Fully annealed bare copper Class B stranded
AWG	Available in 18 or 16 AWG
Insulation	Polyvinyl Chloride (PVC)
Color Coding	Per ICEA Method 9, (black-white-red), plus one conductor per pair/triad printed for identification; additional color coding options available
Shield Options	**Overall (OS)**: Overall Aluminum polyester foil shield in contact with stranded tinned copper drain wire **Individual (IS)**: Each pair or triad with Aluminum polyester foil shield in contact with stranded tinned copper drain wire **Individual and Overall (IS/OS)**: Combination of both individual and overall with Aluminum polyester foil shield in contact with stranded tinned copper drain wire
Jacket	Polyvinyl Chloride (PVC)
Jacket Marking	00000 FT SUPERIOR ESSEX XXAWG XX/PR (or TR) PVC/PVC OS (or IS or IS/OS) 105°C TYPE ITC OR PLTC (UL) SUN RES Made in USA MMDDYYYY
Packaging	Non-returnable wood reels in a variety of lengths and dimensions
Performance Compliances	ASTM B8 ASTM B33 UL 13 UL 2250 NEC Article 727 for ITC
Other Compliances	EPA 40 CFR, part 261 OSHA RoHS-compliant

PRODUCT KEY

Conductor	Stranding	Voltage	Insulation	Shielding Options			Jacket
Cu	B	300V	PVC	OS Alum Mylar	or IS Alum Mylar	or IS Alum Mylar OS	PVC

SUPERIOR ESSEX
Toll Free **800.249.0014** | Fax **770.657.6154** | SuperiorEssex.com/Energy

Rev 10/12 Ed 4.1

Overall Shielded Series E1ACB

PART NUMBERS AND PHYSICAL CHARACTERISTICS

Part Number	Pair Count	Triad Count	Conductor Size AWG	Insulation Thickness in (mm)	Jacket Thickness in (mm)	Overall Diameter in (mm)	Net Weight lbs/kft (kg/km)
E1ACB-181B01PJ00	1	-	18	0.015 (0.38)	0.040 (1.02)	0.239 (6.07)	35 (52)
E1ACB-181B01TJ00	-	1	18	0.015 (0.38)	0.040 (1.02)	0.263 (6.68)	44 (66)
E1ACB-181B02PJ00	2	-	18	0.015 (0.38)	0.042 (1.07)	0.361 (9.17)	55 (82)
E1ACB-181B04PJ00	4	-	18	0.015 (0.38)	0.042 (1.07)	0.439 (11.15)	101 (151)
E1ACB-181B08PJ00	8	-	18	0.015 (0.38)	0.060 (1.52)	0.647 (16.43)	192 (285)
E1ACB-181B12PJ00	12	-	18	0.015 (0.38)	0.060 (1.52)	0.671 (17.04)	256 (382)
E1ACB-181B16PJ00	16	-	18	0.015 (0.38)	0.060 (1.52)	0.751 (19.08)	322 (481)
E1ACB-181B20PJ00	20	-	18	0.015 (0.38)	0.060 (1.52)	0.779 (19.79)	389 (581)
E1ACB-181B24PJ00	24	-	18	0.015 (0.38)	0.070 (1.78)	0.916 (23.27)	471 (703)
E1ACB-181B36PJ00	36	-	18	0.015 (0.38)	0.070 (1.78)	1.031 (26.19)	671 (1001)
E1ACB-181B50PJ00	50	-	18	0.015 (0.38)	0.070 (1.78)	1.181 (30.00)	1059 (1576)
E1ACB-161B01PJ00	1	-	16	0.015 (0.38)	0.040 (1.02)	0.274 (6.96)	45 (67)
E1ACB-161B01TJ00	-	1	16	0.015 (0.38)	0.042 (1.07)	0.296 (7.52)	58 (86)
E1ACB-161B02PJ00	2	-	16	0.015 (0.38)	0.042 (1.07)	0.424 (10.77)	85 (127)
E1ACB-161B04PJ00	4	-	16	0.015 (0.38)	0.053 (1.35)	0.480 (12.19)	132 (197)
E1ACB-161B08PJ00	8	-	16	0.015 (0.38)	0.060 (1.52)	0.725 (18.42)	259 (385)
E1ACB-161B12PJ00	12	-	16	0.015 (0.38)	0.060 (1.52)	0.754 (19.15)	348 (519)
E1ACB-161B16PJ00	16	-	16	0.015 (0.38)	0.070 (1.78)	0.844 (21.44)	443 (661)
E1ACB-161B20PJ00	20	-	16	0.015 (0.38)	0.070 (1.78)	0.906 (23.01)	558 (833)
E1ACB-161B24PJ00	24	-	16	0.015 (0.38)	0.070 (1.78)	1.031 (26.19)	676 (1009)
E1ACB-161B36PJ00	36	-	16	0.015 (0.38)	0.070 (1.78)	1.166 (29.62)	936 (1397)
E1ACB-161B50PJ00	50	-	16	0.015 (0.38)	0.080 (2.03)	1.354 (34.39)	1544 (2298)

The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.

Individually and Overall Shielded Series E1ACD

PART NUMBERS AND PHYSICAL CHARACTERISTICS

Part Number	Pair Count	Triad Count	Conductor Size AWG	Insulation Thickness in (mm)	Jacket Thickness in (mm)	Overall Diameter in (mm)	Net Weight lbs/kft (kg/km)
E1ACD-181B02PJ00	2	-	18	0.015 (0.38)	0.042 (1.07)	0.384 (9.75)	69 (103)
E1ACD-181B02TJ00	-	2	18	0.015 (0.38)	0.040 (1.02)	0.445 (11.30)	96 (143)
E1ACD-181B04PJ00	4	-	18	0.015 (0.38)	0.042 (1.07)	0.466 (11.84)	120 (179)
E1ACD-181B04TJ00	-	4	18	0.015 (0.38)	0.050 (1.27)	0.513 (13.03)	143 (213)
E1ACD-181B08PJ00	8	-	18	0.015 (0.38)	0.060 (1.52)	0.664 (16.87)	212 (316)
E1ACD-181B08TJ00	-	8	18	0.015 (0.38)	0.060 (1.52)	0.690 (17.53)	275 (409)
E1ACD-181B12PJ00	12	-	18	0.015 (0.38)	0.060 (1.52)	0.762 (19.35)	315 (469)
E1ACD-181B12TJ00	-	12	18	0.015 (0.38)	0.060 (1.52)	0.841 (21.36)	412 (613)
E1ACD-181B16PJ00	16	-	18	0.015 (0.38)	0.060 (1.52)	0.844 (21.44)	401 (597)
E1ACD-181B16TJ00	-	16	18	0.015 (0.38)	0.070 (1.78)	0.962 (24.43)	550 (819)
E1ACD-181B20PJ00	20	-	18	0.015 (0.38)	0.070 (1.78)	0.956 (24.28)	505 (752)
E1ACD-181B20TJ00	-	20	18	0.015 (0.38)	0.070 (1.78)	1.062 (26.97)	668 (994)
E1ACD-181B24PJ00	24	-	18	0.015 (0.38)	0.070 (1.78)	1.039 (26.39)	596 (887)
E1ACD-181B24TJ00	-	24	18	0.015 (0.38)	0.070 (1.78)	1.144 (29.06)	785 (1168)
E1ACD-181B36PJ00	36	-	18	0.015 (0.38)	0.070 (1.78)	1.216 (30.89)	846 (1259)
E1ACD-181B50PJ00	50	-	18	0.015 (0.38)	0.080 (2.03)	1.451 (36.86)	1165 (1734)
E1ACD-161B02PJ00	2	-	16	0.015 (0.38)	0.042 (1.07)	0.449 (11.40)	96 (143)
E1ACD-161B02TJ00	-	2	16	0.015 (0.38)	0.040 (1.02)	0.494 (12.55)	122 (182)
E1ACD-161B04PJ00	4	-	16	0.015 (0.38)	0.053 (1.35)	0.507 (12.88)	151 (225)
E1ACD-161B04TJ00	-	4	16	0.015 (0.38)	0.050 (1.27)	0.572 (14.53)	195 (290)
E1ACD-161B08PJ00	8	-	16	0.015 (0.38)	0.060 (1.52)	0.742 (18.85)	288 (429)
E1ACD-161B08TJ00	-	8	16	0.015 (0.38)	0.060 (1.52)	0.785 (19.94)	375 (558)
E1ACD-161B12PJ00	12	-	16	0.015 (0.38)	0.060 (1.52)	0.857 (21.77)	435 (647)
E1ACD-161B12TJ00	-	12	16	0.015 (0.38)	0.070 (1.78)	0.971 (24.66)	597 (888)
E1ACD-161B16PJ00	16	-	16	0.015 (0.38)	0.070 (1.78)	0.975 (24.79)	575 (856)
E1ACD-161B16TJ00	-	16	16	0.015 (0.38)	0.070 (1.78)	1.073 (27.25)	765 (1138)
E1ACD-161B20PJ00	20	-	16	0.015 (0.38)	0.070 (1.78)	1.081 (27.46)	705 (1049)
E1ACD-161B20TJ00	-	20	16	0.015 (0.38)	0.070 (1.78)	1.194 (30.33)	933 (1388)
E1ACD-161B24PJ00	24	-	16	0.015 (0.38)	0.070 (1.78)	1.166 (29.62)	828 (1232)
E1ACD-161B24TJ00	-	24	16	0.015 (0.38)	0.080 (2.03)	1.311 (33.30)	1125 (1674)
E1ACD-161B36PJ00	36	-	16	0.015 (0.38)	0.080 (2.03)	1.392 (35.36)	1215 (1808)
E1ACD-161B50PJ00	50	-	16	0.015 (0.38)	0.090 (2.29)	1.654 (42.01)	1670 (2485)

The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.