
358 Hall Avenue
P.O. Box 384
Wallingford, CT 06492
1-800-677-2288 fax 203-265-8422
www.timesfiber.com

Product Information *T10500JB*

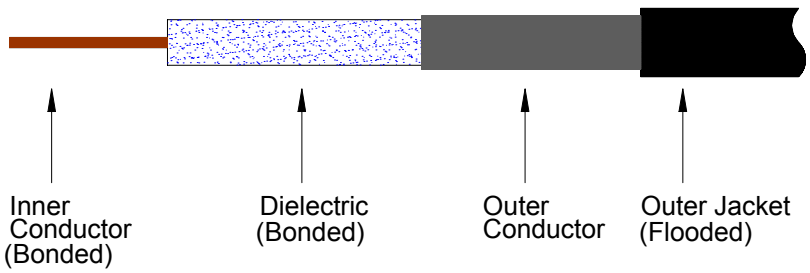

500 Series Coaxial Cable

Copper Clad Aluminum Conductor Inner Conductor
Foamed Polyethylene Dielectric
Seamless Aluminum Tube Outer Conductor
Underground Floodant
Medium Density Polyethylene Jacket

Cable Ordering Information

Part Number	MI Number
T10500JB	24502

Characteristics

Material Specifications		
Inner Conductor	Copper Clad Aluminum	
Dielectric	Foamed Polyethylene	
Outer Conductor	Seamless Aluminum Tube	
Floodant	Underground	
Jacket	Polyethylene, Black	
Messenger	---	
Physical Specifications	**Inches**	**(mm)**
Inner Conductor	0.109	2.77
Dielectric	0.450	11.4
Outer Conductor	0.500	12.7
Jacket	0.570	14.5
Messenger	-	0.0
Cable Width	-	0.0
Mechanical Specifications	**inches**	**(mm)**
Minimum Bend Radius	4.0	102
Weight. Lb/kft (kg/km)	103	(153)

Electrical Specifications		
Impedance, Ω	75 ± 2	
Velocity of Propagation, %	87	
Capacitance, Nominal	15.6 pF/ft	51.2 pF/m
DC Resistance	Ω / kft	Ω / km
Inner Conductor	1.34	4.40
Outer Conductor	0.36	1.18
Loop	1.70	5.58

Attenuation, Maximum @ 68°F (20°C)		
Frequency, MHz	dB / 100 ft	dB / 100 m
5	0.16	0.52
55	0.55	1.80
211	1.08	3.55
250	1.19	3.92
270	1.24	4.07
300	1.31	4.30
330	1.38	4.54
350	1.43	4.69
400	1.53	5.02
450	1.63	5.35
500	1.73	5.68
550	1.82	5.97
600	1.91	6.27
750	2.16	7.09
870	2.35	7.69
1000	2.53	8.30

All Rights Reserved
Specifications subject to change without notice