
DATE: 09/07/11

SPECIFICATION SHEET
TAPPAN Spec. T50061

T50061.1

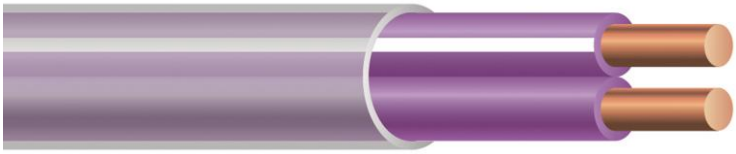

INTENDED USES:	Bus Cable for lighting control and building management systems. 300V rated, plenum rated.
CONSTRUCTION:	16 AWG SOLID BC; 2 CONDUCTORS; TWISTED AND JACKETED.
INSULATION:	FEP
COLOR CODE:	VIOLET, AND VIOLET w/WHITE LINE
SHIELD/DRAIN:	UNSHIELDED
JACKET:	FEP ; CLEAR
NOM. DIAMETER:	0.170 INCH
CABLE WT:	27.2 Lb/1000Ft Approx (EXCLUDING REEL OR BOX)
CAPACITANCE:	25.1 pF/ft Nom.
VEL OF PROP:	68.2%
IMPEDANCE:	59 OHMS
RESISTANCE:	4.01 OHMS D.C. PER 1000 FT @ 68 DEG. F
TEMP/VOLTAGE:	200C / 300V
PRINT LEGEND:	TAPPAN W & C T50061 SYSTEM CONTROL BUS PLENUM E118871 CMP/CL3P 16AWG 2/C (UL) c(UL) 200 DEG. C. FEP/FEP MADE IN USA RoHS COMPLIANT
UL:	CMP/CL3P
MISC:	MADE IN USA EQUIVALENT TO C-PCBL-216-CL-1

* +/- 10% Manufacturing tolerance
* On non-standard product, customer agrees to accept all lengths manufactured

Tappan Wire & Cable Inc. provides information and specifications on an “as is” basis. Information in specifications described herein are subject to error and/or omission, and subject to change without notice. Although we make all efforts possible to ensure the accuracy and timeliness of the information, Tappan Wire & Cable, will not be held liable for any damages whatsoever, even if advised of the possibility of such damages, arising from the use, or inability to use, the information or specifications herein. Please refer to our “Website Use Policy”, listed on our website, www.tappanwire.com, under the Sales Support Section for full details, or contact your Tappan Representative. This drawing may contain patented or proprietary information. It is the property of Tappan Wire and must not be used in any way detrimental to Tappan Wire. Acceptance by signature of this drawing will be considered as an agreement of and acceptance of the foregoing.

100 Bradley Parkway • Blauvelt, NY 10913
Phone: 1-800-WIRE-911 • Fax: 1-845-353-9315
www.tappanwire.com