
# FREP®

## FR-EPR/CPE, Control, Unshielded
## 600V, UL Type TC-ER[1]—E-1 Color Code

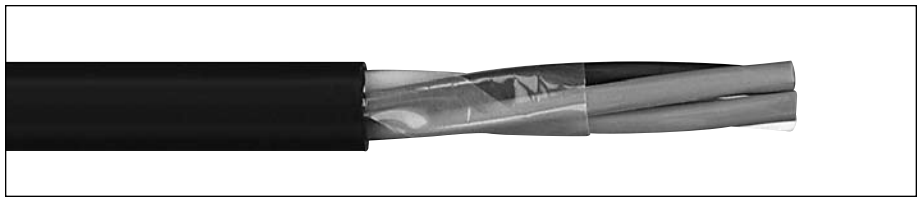

| CATALOG NUMBER | NO. OF COND. | COND. SIZE (AWG) | COND. STRAND | MINIMUM AVG. INSULATION THICKNESS | | MINIMUM AVG. JACKET THICKNESS | | NOMINAL CABLE O.D. | | COPPER WEIGHT | | NET WEIGHT | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | INCHES | mm | INCHES | mm | INCHES | mm | LBS/ 1000 FT | kg/km | LBS/ 1000 FT | kg/km |
| **14 AWG MULTI CONDUCTORS** | | | | | | | | | | | | | |
| **280590** | 2 Flat | 14 | 7/.0242 | 0.030 | 0.76 | 0.045 | 1.14 | .365 x .230 | 9.30 x 5.80 | 26 | 38 | 61 | 91 |
| **280230** | 3 | 14 | 7/.0242 | 0.030 | 0.76 | 0.045 | 1.14 | 0.390 | 9.91 | 39 | 59 | 92 | 137 |
| **280240** | 4 | 14 | 7/.0242 | 0.030 | 0.76 | 0.045 | 1.14 | 0.425 | 10.80 | 53 | 78 | 115 | 171 |
| **280250** | 5 | 14 | 7/.0242 | 0.030 | 0.76 | 0.045 | 1.14 | 0.465 | 11.81 | 66 | 98 | 139 | 207 |
| **280260** | 7 | 14 | 7/.0242 | 0.030 | 0.76 | 0.045 | 1.14 | 0.505 | 12.83 | 92 | 137 | 173 | 257 |
| **280270** | 9 | 14 | 7/.0242 | 0.030 | 0.76 | 0.060 | 1.52 | 0.620 | 15.75 | 118 | 176 | 240 | 357 |
| **280280** | 12 | 14 | 7/.0242 | 0.030 | 0.76 | 0.060 | 1.52 | 0.700 | 17.78 | 158 | 235 | 301 | 448 |
| **280290*** | 19 | 14 | 7/.0242 | 0.030 | 0.76 | 0.060 | 1.52 | 0.815 | 20.70 | 250 | 372 | 468 | 696 |
| **385350*** | 25 | 14 | 7/.0242 | 0.030 | 0.76 | 0.080 | 2.03 | 0.935 | 23.75 | 323 | 481 | 624 | 929 |
| **385360*** | 30 | 14 | 7/.0242 | 0.030 | 0.76 | 0.080 | 2.03 | 1.030 | 26.16 | 387 | 576 | 747 | 1112 |
| **385370*** | 37 | 14 | 7/.0242 | 0.030 | 0.76 | 0.080 | 2.03 | 1.110 | 28.19 | 466 | 694 | 875 | 1302 |
| **12 AWG MULTI CONDUCTORS** | | | | | | | | | | | | | |
| **279850** | 2 Flat | 12 | 7/.0305 | 0.030 | 0.76 | 0.045 | 1.14 | .400 x .245 | 10.20 x 6.20 | 42 | 63 | 82 | 122 |
| **280350*** | 2 | 12 | 7/.0305 | 0.030 | 0.76 | 0.045 | 1.14 | 0.410 | 10.41 | 42 | 63 | 94 | 140 |
| **280360** | 3 | 12 | 7/.0305 | 0.030 | 0.76 | 0.045 | 1.14 | 0.435 | 11.05 | 64 | 95 | 124 | 185 |
| **279910** | 4 | 12 | 7/.0305 | 0.030 | 0.76 | 0.045 | 1.14 | 0.475 | 12.07 | 85 | 127 | 157 | 234 |
| **280370** | 5 | 12 | 7/.0305 | 0.030 | 0.76 | 0.045 | 1.14 | 0.520 | 13.21 | 106 | 158 | 191 | 284 |
| **280380** | 7 | 12 | 7/.0305 | 0.030 | 0.76 | 0.060 | 1.52 | 0.595 | 15.11 | 149 | 221 | 268 | 399 |
| **280390*** | 9 | 12 | 7/.0305 | 0.030 | 0.76 | 0.060 | 1.52 | 0.695 | 17.65 | 191 | 285 | 337 | 502 |
| **280400** | 12 | 12 | 7/.0305 | 0.030 | 0.76 | 0.060 | 1.52 | 0.765 | 19.43 | 247 | 368 | 428 | 637 |
| **383930*** | 19 | 12 | 7/.0305 | 0.030 | 0.76 | 0.080 | 2.03 | 0.940 | 23.88 | 391 | 582 | 688 | 1024 |
| **383940*** | 25 | 12 | 7/.0305 | 0.030 | 0.76 | 0.080 | 2.03 | 1.095 | 27.81 | 515 | 767 | 854 | 1271 |
| **383950*** | 30 | 12 | 7/.0305 | 0.030 | 0.76 | 0.080 | 2.03 | 1.150 | 29.21 | 618 | 920 | 1002 | 1491 |
| **330800*** | 37 | 12 | 7/.0305 | 0.030 | 0.76 | 0.080 | 2.03 | 1.240 | 31.50 | 762 | 1134 | 1240 | 1845 |
| **10 AWG MULTI CONDUCTORS** | | | | | | | | | | | | | |
| **280600*** | 2 Flat | 10 | 7/.0385 | 0.030 | 0.76 | 0.045 | 1.14 | .445 x .270 | 11.30 x 6.90 | 64 | 95 | 113 | 168 |
| **280420*** | 2 | 10 | 7/.0385 | 0.030 | 0.76 | 0.045 | 1.14 | 0.455 | 11.56 | 65 | 97 | 128 | 190 |
| **279920** | 3 | 10 | 7/.0385 | 0.030 | 0.76 | 0.045 | 1.14 | 0.485 | 12.32 | 100 | 150 | 172 | 256 |
| **279930** | 4 | 10 | 7/.0385 | 0.030 | 0.76 | 0.060 | 1.52 | 0.560 | 14.22 | 134 | 199 | 234 | 348 |
| **330990*** | 5 | 10 | 7/.0385 | 0.030 | 0.76 | 0.060 | 1.52 | 0.615 | 15.62 | 167 | 249 | 284 | 423 |
| **280430*** | 7 | 10 | 7/.0385 | 0.030 | 0.76 | 0.060 | 1.52 | 0.670 | 17.02 | 234 | 349 | 381 | 567 |
| **382880*** | 9 | 10 | 7/.0385 | 0.030 | 0.76 | 0.060 | 1.52 | 0.760 | 19.30 | 295 | 440 | 464 | 691 |
| **383970*** | 12 | 10 | 7/.0385 | 0.030 | 0.76 | 0.080 | 2.03 | 0.950 | 22.99 | 402 | 598 | 651 | 969 |

Dimensions and weights are nominal; subject to industry tolerances.
* Non-stock item; minimum runs apply. Please consult Customer Service for price and delivery.
[1] Approved as TYPE TC-ER for Exposed Run applications of 3 or more conductors as defined by NEC.

### Product Construction:

**Conductor:**
- 14 AWG thru 10 AWG fully annealed stranded tinned copper per ASTM B33
- Class B stranding per ASTM B8

**Insulation:**
- Flame-Retardant Ethylene Propylene Rubber (FR-EPR) Type II
- Color-coded per ICEA Method 1, Table E-1 (includes white or green)

**Jacket:**
- Lead-free, flame-retardant thermoplastic Chlorinated Polyethylene (CPE)

**Print**
- GENERAL CABLE® (PLANT OF MFG) FREP® XX/C XXAWG EPR/CPE (UL) TYPE TC-ER[1] XHHW-2 CDRS 90°C WET OR DRY 600V DIR BUR SUN RES DAY/MONTH/YEAR OF MFG SEQUENTIAL FOOTAGE MARK

### Options:
- 2kV version
- Bare copper conductor
- Class C stranding
- E-2 Color Code—see Spec 4300
- Overall shielded multi conductor
- Flame-Retardant Cross-Linked Polyethene (FR-XLPE) insulation
- Thermoplastic Low-Smoke, Zero-Halogen (LSZH) jacket
- Other constructions available upon request

### Applications:
- In free air, raceways or direct burial
- In wet or dry locations
- Permitted for Exposed Run (ER) use in accordance with NEC for 3 or more conductors
- Approved for direct burial, Class I, Div. 2 industrial hazardous locations per NEC

### Features:
- Rated at 90°C wet or dry
- Ripcord applied to all cables with jacket thickness of 60 mils or less
- Excellent physical, thermal and electrical properties
- Sunlight- and weather-resistant
- Excellent moisture resistance
- Excellent resistance to compression cuts and heat deformation
- Low coefficient of friction for easy pulling
- Excellent flame resistance—burns to ash; does not exhibit thermoplastic drip
- Excellent low temperature cold bend characteristics
- Meets cold bend test at -40°C
- Meets the crush and impact requirements of Type MC cable for 3 or more conductors

### Compliances:

**Industry Compliances:**
- UL 44 Type XHHW-2
- UL 1277 Type TC-ER for 3 or more conductors, UL File # E57179
- UL 1581
- ICEA S-73-532
- ICEA S-95-658/NEMA WC70

**Flame Test Compliances:**
- UL 1581 VW-1
- UL 1277
- IEEE 383
- IEEE 1202
- CSA FT4
- ICEA T-29-520

**Other Compliances:**
- EPA 40 CFR, Part 261 for leachable lead content per TCLP
- OSHA Acceptable

### Packaging:
- Material cut to length and shipped on non-returnable wood reels

UL LISTED

General Cable

Phone: 888-593-3355
www.generalcable.com