
VNTC®

PVC/Nylon/PVC, Instrumentation, Shielded 600V, UL Type TC, Overall Shielded Pairs/Triads

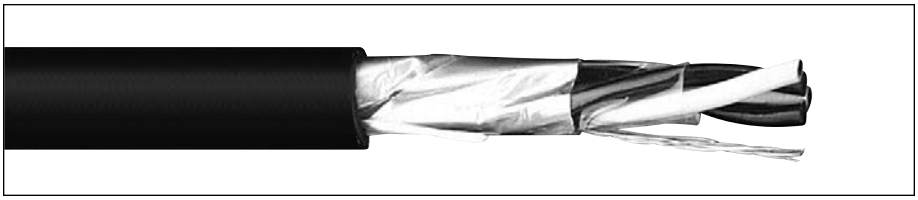

CATALOG NUMBER	NO. OF PAIRS/ TRIADS	COND. SIZE (AWG)	COND. STRAND	MINIMUM AVG. INSULATION THICKNESS		MINIMUM AVG. JACKET THICKNESS		NOMINAL CABLE O.D.		COPPER WEIGHT		NET WEIGHT	
				INCHES	mm	INCHES	mm	INCHES	mm	LBS/ 1000 FT	kg/km	LBS/ 1000 FT	kg/km
OVERALL SHIELDED PAIRS/TRIADS 18 AWG CONDUCTORS													
235020	1	18	7/.0152	0.020	0.51	0.045	1.14	0.280	7.11	12	19	41	61
239210	1 TRI	18	7/.0152	0.020	0.51	0.045	1.14	0.300	7.62	18	27	49	73
235910	2	18	7/.0152	0.020	0.51	0.045	1.14	0.440	11.18	23	34	72	107
319740*	3	18	7/.0152	0.020	0.51	0.045	1.14	0.465	11.81	33	50	90	134
235980	4	18	7/.0152	0.020	0.51	0.045	1.14	0.505	12.83	44	65	110	164
336830*	5	18	7/.0152	0.020	0.51	0.060	1.52	0.570	14.48	55	82	144	214
336840*	7	18	7/.0152	0.020	0.51	0.060	1.52	0.585	14.86	75	112	177	263
230760*	12	18	7/.0152	0.020	0.51	0.060	1.52	0.770	19.56	127	189	277	412
270970*	16	18	7/.0152	0.020	0.51	0.080	2.03	0.825	20.96	168	250	355	528
336850*	20	18	7/.0152	0.020	0.51	0.080	2.03	0.905	22.99	210	313	455	677
230750*	24	18	7/.0152	0.020	0.51	0.080	2.03	1.020	25.91	252	375	544	810
230800*	36	18	7/.0152	0.020	0.51	0.080	2.03	1.150	29.21	378	562	763	1135
336860*	50	18	7/.0152	0.020	0.51	0.080	2.03	1.405	35.69	525	781	1036	1542
OVERALL SHIELDED PAIRS/TRIADS 16 AWG CONDUCTORS													
230830	1	16	7/.0192	0.020	0.51	0.045	1.14	0.300	7.62	20	29	52	77
230840	1 TRI	16	7/.0192	0.020	0.51	0.045	1.14	0.315	8.00	27	40	61	91
238410*	2	16	7/.0192	0.020	0.51	0.045	1.14	0.470	11.94	37	54	93	138
239200*	3	16	7/.0192	0.020	0.51	0.045	1.14	0.505	12.83	53	79	117	174
230790*	4	16	7/.0192	0.020	0.51	0.060	1.52	0.575	14.61	69	103	160	238
336870*	5	16	7/.0192	0.020	0.51	0.060	1.52	0.610	15.49	87	129	190	283
336880*	7	16	7/.0192	0.020	0.51	0.060	1.52	0.630	16.00	117	174	239	356
244590*	12	16	7/.0192	0.020	0.51	0.060	1.52	0.825	20.96	201	299	370	551
244610*	16	16	7/.0192	0.020	0.51	0.080	2.03	0.970	24.64	267	397	513	763
336890*	20	16	7/.0192	0.020	0.51	0.080	2.03	1.010	25.65	337	502	628	935
230780*	24	16	7/.0192	0.020	0.51	0.080	2.03	1.135	28.83	398	592	740	1101
230820*	36	16	7/.0192	0.020	0.51	0.080	2.03	1.375	34.93	595	886	1063	1582
230810*	50	16	7/.0192	0.020	0.51	0.080	2.03	1.570	39.88	833	1240	1435	2136
OVERALL SHIELDED PAIRS/TRIADS 14 AWG CONDUCTORS													
237490	1	14	7/.0242	0.015	0.38	0.045	1.14	0.325	8.26	28	42	62	92

Dimensions and weights are nominal; subject to industry tolerances.
* Non-stock item; minimum runs apply. Please consult Customer Service for price and delivery.

Product Construction:

Conductor:
- 18 AWG thru 14 AWG bare, annealed copper per ASTM B3
- Class B stranding per ASTM B8

Insulation:
- Flame-retardant Polyvinyl Chloride (PVC) with clear Polyamide (nylon)
- Color-coded per ICEA Method 1: Pairs - black and white; Triads - black, white and red. One conductor in each pair or triad is printed alpha-numerically for easy identification

Shield:
Overall shielded pairs/triads
- Overall shield is Flexfoil® aluminum/polyester in contact with stranded tinned copper drain wire

Jacket:
- Lead-free, flame-retardant, sunlight-resistant Polyvinyl Chloride (PVC)

Print:
- GENERAL CABLE® (PLANT OF MFG) VNTC® XX/PS/TS XXAWG SHIELDED (UL) TYPE TC 600V TFN SUN RES DIR BUR DAY/MONTH/YEAR OF MFG SEQUENTIAL FOOTAGE MARK

Options:
- Tinned copper conductor
- Class C stranding
- Individual and overall shielded pairs/triads
- Other constructions available upon request

Applications:
- In free air, raceways or direct burial
- In wet or dry locations
- Permitted for use in Class I, Division 2 industrial hazardous locations per NEC

Features:
- Rated at 90°C dry, 75°C wet
- Ripcord applied to all cables with jacket thickness of 60 mils or less
- Provides sunlight, cold bend and cold impact resistance
- Offer the smallest cable O.D. available for suitable applications
- Provides excellent oil and chemical resistance
- Provides a long service life
- Meets cold bend test at -25°C

Compliances:
Industry Compliances:
- UL 1277 Type TC, UL File # E57179
- UL 1581
- NEC Type TFN conductors

Flame Test Compliances:
- UL 1277
- IEEE 383
- IEEE 1202
- CSA FT4

Other Compliances:
- EPA 40 CFR, Part 261 for leachable lead content per TCLP
- OSHA Acceptable
- RoHS Compliant

Packaging:
- Material cut to length and shipped on non-returnable wood reels

UL LISTED

RoHS Compliant Directive 2002/95/EC

General Cable
Phone: 888-593-3355
www.generalcable.com