
SIMpull® CT1A - 13ET

**15kVU Type MV-105. Aluminum Conductor.
Thermosetting Conductor Shield.
EPR Insulation. Thermosetting Insulation Shield.
Copper Tape Shield. SIMpull ® PVC Jacket.
Sizes AWG 1/0 and Larger Listed for CT Use.**

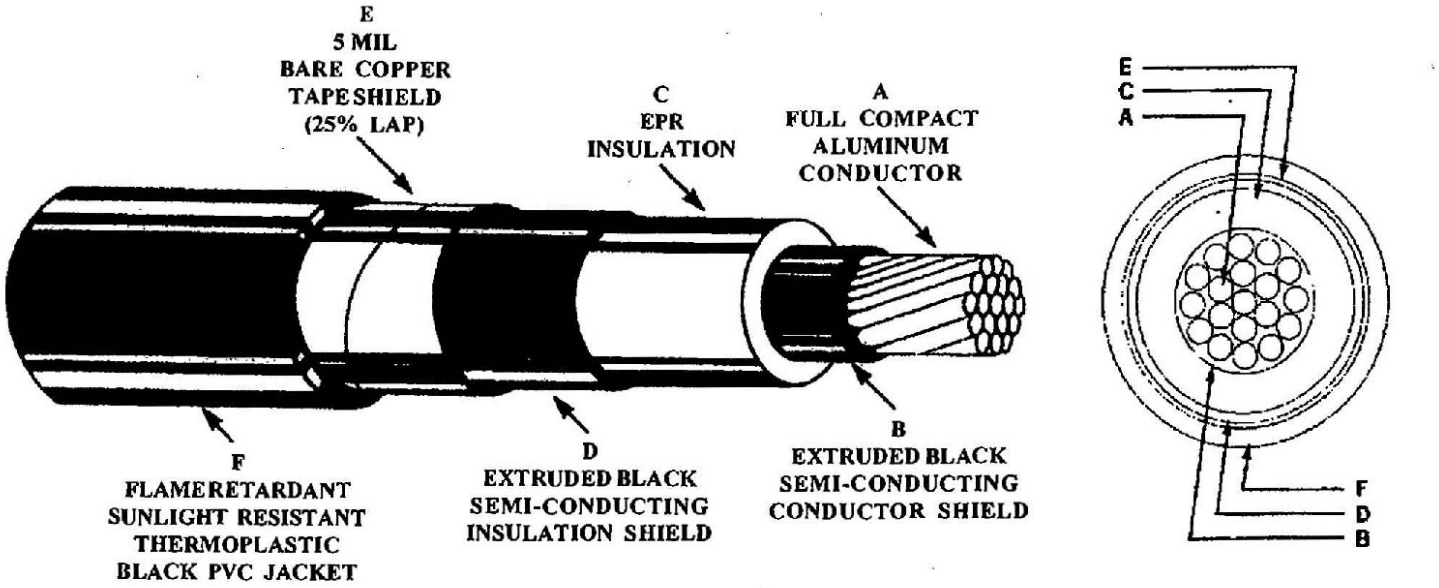

APPLICATIONS

Southwire SIMpull CT1A-13ET Type MV-105 Cable is for use in aerial, direct burial, cable trays, conduit, and underground duct installations as permitted by the National Electrical Code. These cables are capable of operating continuously at a conductor temperature not in excess of 105°C for normal operation, 140°C for emergency overload conditions, and 250°C for short circuit conditions, and are rated at 15,000V, 133% insulation level (ungrounded system). Maximum sidewall pressure is 1000 lbs. This cable can be installed without the need for pulling lubricant.

SPECIFICATIONS

Southwire SIMpull CT1A-13ET Type MV-105 Cable is manufactured and tested in accordance with the latest revisions of the following standards and specification:

- UL 1072 - Medium Voltage Power Cables.
- ICEA S-93-639 (NEMA WC 74) - 5-46 kV Shielded Power Cable for Use in the Transmission & Distribution of Electric Energy.
- ICEA S-97-682 (when requested) 5-46 kV Standard for Utility Shielded Power Cable.
- UL 1685 - (AWG 1/0 and larger) - UL-CT Flame Exposure Test
- IEEE 1202/FT4 - Flame Test (70,000 Btu/hr Vertical Tray Test) with CPE and Solonon jacket.
- ASTM B800, B801

Cable meets the Certified qualification tests were performed in accordance with the requirements of AEIC CS-8.

CONSTRUCTION

Southwire SIMpull CT1A-13ET Type MV-105 Cable offers our patented SIM (Slikqwik ® Infused Membrane) Technology ® for easier pulling, flexible, easy bending insulation, easy cable preparation, fast stripping thermosetting insulation shield, 105°C continuous operating temperature, 100% shield coverage, and it is triple extruded. Cable is sunlight resistant, suitable for direct burial, and listed for cable tray use in sizes 1/0 and larger. SOLONON™ low smoke, non halogen polyolefin jackets and CPE jackets are available upon request.

SouthwireNoLube™
One Southwire Drive
Carrollton, Ga. 30119 USA

MADE IN ★ THE USA

Copyright 2003, Southwire Company.
All Rights Reserved.

®Southwire is a registered trademark of Southwire Company.

CT1A-13ET 1c, 15kV, 220mil EPR(133%), TS, PVC, CT Rated

Product Code	Size	Conductor Diameter		0.220" (5.59mm) Insulation Diameter		Extruded Insulation Shield Diameter		Min. Point Jacket Thickness		Approximate Overall Diameter		Approximate Net Weight		Allowable Ampacities +	
	AWG or kcmil	inch*	mm	inch**	mm	inch***	mm	inch	mm	inch	mm	lbs/Mft.	kg/km	Duct	Conduit In Air
C1A-13ET-002	2	.268	6.80	.759	19.27	.815	20.70	.07	1.78	.982	24.94	488	726	130	130
C1A-13ET-001	1	.299	7.59	.789	20.04	.845	21.46	.07	1.78	1.012	25.70	523	779	145	150
C1A-13ET-010	1/0	.336	8.53	.826	20.98	.882	22.40	.07	1.78	1.049	26.64	575	855	165	170
C1A-13ET-020	2/0	.376	9.55	.866	21.99	.922	23.41	.07	1.78	1.089	27.66	627	933	190	200
C1A-13ET-030	3/0	.423	10.74	.911	23.15	.967	24.56	.07	1.78	1.134	28.80	690	1026	215	225
C1A-13ET-040	4/0	.475	12.06	.959	24.35	1.017	25.83	.07	1.78	1.184	30.07	758	1128	245	260
C1A-13ET-250	250	.520	13.20	1.017	25.83	1.075	27.30	.07	1.78	1.242	31.54	837	1245	270	290
C1A-13ET-350	350	.616	15.65	1.094	27.78	1.170	29.71	.07	1.78	1.337	33.96	994	1479	330	350
C1A-13ET-500	500	.736	18.69	1.21	30.8	1.29	32.76	.07	1.78	1.457	37	1217	1811	400	430
C1A-13ET-600	600	.813	20.65	1.302	33.07	1.38	35.05	.07	1.78	1.544	39.22	1377	2049	455	475
C1A-13ET-750	750	.908	23.06	1.396	35.45	1.47	37.33	.07	1.78	1.639	41.6	1583	2356	490	540
C1A-13ET-100	1000	1.06	26.92	1.546	39.26	1.62	41.21	.1	2.54	1.852	47.0	2026	3014	565	640

*Nominal diameter per ASTM Standards. **±0.030" ***±0.050"

+Ampacities are based on the NEC, 2008 Edition. Duct ampacities are based on Table 310.78 three conductors in one underground duct, 105°C conductor, 20°C earth ambient temperature. Conduit in air ampacities are based on Table 310.74 three cables in isolated conduit in air, 105°C conductor, 40°C ambient temperature.

Scope: This specification covers single conductor EPR (ethylene propylene rubber) insulated, shielded, thermoplastic jacketed power cable for use in aerial, direct burial, cable trays, conduit, and underground duct installations. This cable is capable of operating continuously at a conductor temperature not in excess of 105°C for normal operation, 140°C for emergency overload conditions, and 250°C for short circit conditions, and is rated at 15,000 V, 133% insulation level (ungrounded system).

Standards: The following standards shall form a part of this specification - UL Standard 1072 for Medium Voltage Power Cable and ICEA S-93-639 (NEMA WC 74) 5-46 kV Shielded Power Cable for Use in the Transmission & Distribution of Electric Energy.

Conductor: The conductor shall be compact aluminum in accordance with ASTM specs B800 and B801 and ICEA Part 2, Section 2.1 and 2.5.

Conductor Shield: The conductor shall be shielded with an extruded semi-conducting thermosetting polymeric layer over the conductor, applied in tandem with and firmly bonded to the insulation.

Insulation: The insulation shall be EPR (ethylene propylene rubber) meeting the requirements of the referenced standards. The nominal thickness shall be 0.220".

Insulation Shield: The insulation shall be shielded with an extruded layer of semi-conducting thermosetting material which shall be identified as being semi-conducting. Over this layer shall be applied a helically-wrapped 5-mil copper tape with 25% overlap.

Jacket: The cable shall be provided with a jacket of black sunlight resistant PVC conforming to the requirements specified for polyvinyl chloride jackets in ICEA. The average thickness shall be in accordance with Table 7-3 of ICEA. Optional SOLONON low smoke, non halogen polyolefin jackets and CPE jackets are available upon request.

Identification: Cable shall be identified by surface printing on the jacket.

Tests: Qualification tests shall be conducted in accordance with the requirements of AEIC.

SouthwireNoLube™
One Southwire Drive
Carrollton, Ga. 30119 USA

MADE IN ★ THE USA

Copyright 2003, Southwire Company.
All Rights Reserved.

®Southwire is a registered trademark of Southwire Company.