
AL01XXH

600V Type MC
Cross-linked Polyethylene (XLP) Insulation
Aluminum Armor. PVC Jacket.

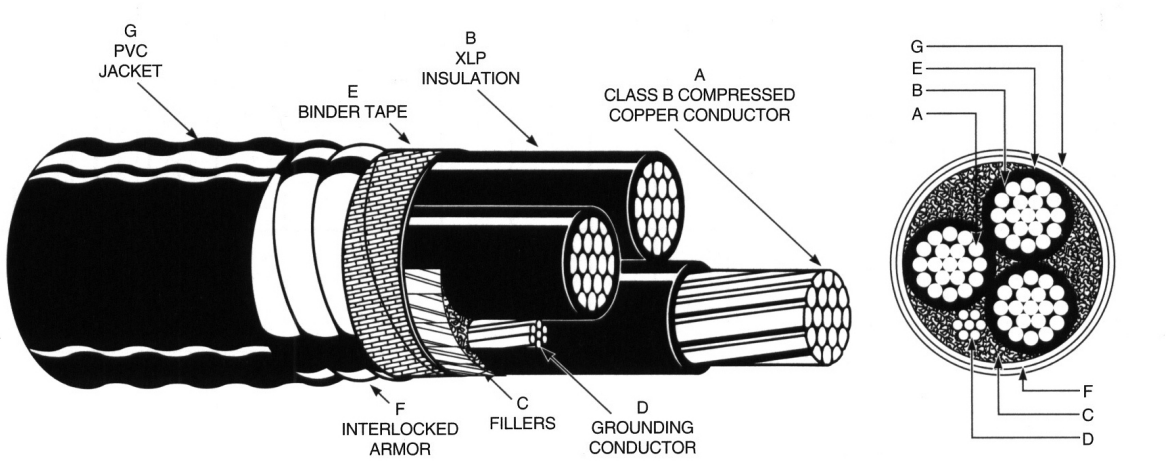

APPLICATIONS

Southwire's 600 Volt Type MC Cable is for use in aerial installations, direct burial, metal racks, cable trays, troughs or continuous rigid cable supports. Listed by Underwriters Laboratories as Type MC, this cable is capable of operating continuously at a maximum conductor temperature of 90° C in wet or dry locations. For use in Class I Div. 2, Class II Div. 2, & Class III Div. 1, hazardous locations.

SPECIFICATIONS

Southwire's 600 Volt Type MC Cable is manufactured and tested in accordance with the latest revisions of:

- UL 44 - Thermoset-Insulated Wires and Cables.
- UL 1569 - Metal-Clad Cables.
- IEEE 1202 - Flame Testing of Cables for Use in Cable Tray in Industrial and Commercial Occupancies (70,000 Btu/hr).
- ICEA T-29-520 - Vertical Cable Tray Flame Tests (210,000 Btu/hr).
- ICEA S-95-658 (NEMA WC 70) construction requirements.

CONSTRUCTION

Southwire's 600 Volt Type MC Cable is rated 90°C wet or dry and is flame and sunlight resistant. It's Heavy Duty construction starts with proven XLP insulated XHHW-2 conductors and a bare copper grounding conductor surrounded with aluminum armor (M/C). The entire assembly is covered with a PVC outer jacket. For use in cable trays per NEC Article 392. CPE and non-halogen jackets are available upon request.

Southwire
One Southwire Drive
Carrollton, Ga. 30119 USA

MADE IN ★ THE USA

Copyright 2010, Southwire Company.
All Rights Reserved.

®Southwire is a registered trademark of Southwire Company.

AL01XXH 3c, XLPE (XHHW), GW, Alum. Interlocked Armor

Product Code	Size	Conductor Diameter		Insulation Thickness		Insulation Diameter		Gnd.* Cond. Size	Approx. Core Diameter		Armored Diameter		Jacket Thickness		Approx. Overall Diameter		Approximate Net Weight		Allowable Ampacity+
	AWG or kcmil	inch	mm	inch	mm	inch	mm	AWG	inch	mm	inch	mm	inch	mm	inch	mm	lb./Mft.	kg/km	
AL01-XXH-008	8	.139	3.53	.045	1.14	.232	5.9	10	.51	12.9	.72	18.3	.05	1.27	.82	20.8	405	603	59
AL01-XXH-006	6	.174	4.43	.045	1.14	.267	6.79	8	.586	14.9	.796	20.2	.05	1.27	.896	22.7	550	819	79
AL01-XXH-004	4	.221	5.6	.045	1.14	.314	7.96	8	.685	17.4	.895	22.7	.05	1.27	.995	25.3	727	1082	104
AL01-XXH-002	2	.277	7.04	.045	1.14	.37	9.41	6	.808	20.5	1.018	25.9	.05	1.27	1.118	28.4	1048	1560	138
AL01-XXH-001	1	.322	8.18	.055	1.4	.435	11.05	6	.948	24.1	1.158	29.4	.05	1.27	1.258	31.9	1269	1888	161
AL01-XXH-010	1/0	.362	9.19	.055	1.4	.475	12.07	6	1.034	26.3	1.244	31.6	.05	1.27	1.344	34.1	1533	2281	186
AL01-XXH-020	2/0	.405	10.29	.055	1.4	.518	13.16	6	1.127	28.6	1.337	34	.05	1.27	1.437	36.5	1823	2713	215
AL01-XXH-030	3/0	.454	11.53	.055	1.4	.567	14.4	4	1.233	31.3	1.443	36.6	.05	1.27	1.543	39.2	2262	3366	249
AL01-XXH-040	4/0	.51	12.95	.055	1.4	.623	15.82	4	1.354	34.4	1.664	42.3	.06	1.52	1.784	45.3	2814	4187	287
AL01-XXH-250	250	.558	14.17	.065	1.65	.691	17.55	4	1.501	38.1	1.811	46	.06	1.52	1.931	49	3275	4874	320
AL01-XXH-350	350	.661	16.79	.065	1.65	.794	20.17	3	1.723	43.8	2.033	51.6	.06	1.52	2.153	54.7	4396	6542	394
AL01-XXH-500	500	.79	20.07	.065	1.65	.923	23.44	2	2.002	50.8	2.312	58.7	.075	1.91	2.462	62.5	6104	9083	487
AL01-XXH-750	750	.968	24.59	.08	2.03	1.131	28.73	1	2.455	62.4	2.765	70.2	.075	1.91	2.915	74	8860	13184	615

*Three uncoated standard ground conductors may be provided upon request.
+Ampacities are based on Table B.310.3 of the NEC, 2008 edition. Ampacities are for multiconductor cables in free air, 90°C conductor, 40°C ambient temperature, for use as specified in section Annex B and for use in cable trays as specified in section 392-11.
Note: All sizes available as four power conductor construction with two ground wires.

SCOPE: This specification covers three conductor XLP(cross-linked polyethylene) insulated, interlocked armored, thermoplastic jacketed, 600-Volt cable with grounding conductor for use in aerial installations, metal racks, cable trays, troughs or continuous rigid cable supports. This cable is capable of operation continuously at a conductor temperature of 90°C in wet or dry locations.

STANDARDS: The following standards will form part of this specification - ICEA S-95-658/NEMA WC70, UL 44, UL 1569 Type MC.

CONDUCTOR: The conductor will be Class B compressed concentric stranded bare copper in accordance with ASTM B3 and B8 and ICEA.

INSULATION: The insulation will be XLP meeting the requirements of the referenced standards. The insulation thickness will be as listed in ICEA, and the minimum spot thickness will not be less than 90% of the listed amounts. The method of phase identification will be similar to ICEA Method 3 using printed circuit numbers and colors(1-BLACK,2-RED,3-BLUE). UL Listed XHHW-2 conductors are used.

GROUNDING CONDUCTOR: The grounding conductor will be Class B compressed concentric stranded bare copper in accordance with ASTM B3 and B8.

ASSEMBLY: The insulated conductors will be cabled round with fillers and with a grounding conductor in one outer interstice and covered with a binder tape.

ARMOR: A single strip of interlocked aluminum tape will be applied over the assembly.

JACKET: The cable will be covered with a black PVC jacket conforming to the requirements specified for polyvinyl chloride in ICEA. The average thickness will be in accordance with ICEA, and the minimum spot thickness will be not less than 80% of the average thickness. The jacket will be sunlight resistant and will meet the requirements of the IEEE 1202 (70,000 Btu/hr) vertical tray flame test and ICEA T-29-520 (210,000 Btu/hr) ribbon burner flame test. Optional CPE and non-halogen jackets are available.

IDENTIFICATION: Manufacturer's identification will be printed on the jacket.

TESTS: Physical and electrical tests will be conducted in accordance with the requirements of the referenced standards.

Southwire
One Southwire Drive
Carrollton, Ga. 30119 USA

MADE IN ★ THE USA

Copyright 2010, Southwire Company.
All Rights Reserved.

®Southwire is a registered trademark of Southwire Company.