Southwire®

Made in USA

4/c #12 Cu, 600 volt XHHW-2 with Ground, interlocked Armor, PVC Jacket

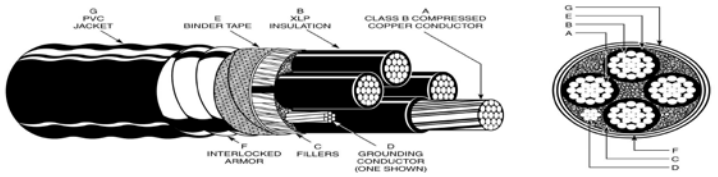

Drawing not to scale

Construction

A	Conductor: Copper Class B compressed ASTM B3 and B 8
B	Insulation: Cross Linked Polyethylene XLP XHHW-2
C	Fillers: None Wicking Paper
D	Grd Conductor: Copper Class B compressed ASTM B3 and B 8
E	Binder Tape: Mylar
F	Armor: Interlocked aluminum armor
G	Jacket: PVC Black

Stock Code Num.	Cond Size Cu	A) Cond Dia (inches)	B) Insul. thickness (mils)	C) Diam. over insul. (inches)	D) Grd. Size Cu	Core Diam. (inches)	Diam. over armor (inches)	G) Nom. jacket thickness (mils)	Overall OD (Inches)	Weight (lbs./1000')	Ampacity for 600 V NEC 310.15 (B) 16 amps 75 C
57350299	12	0.089	30.00	0.15	12	0.36	0.61	50	0.71	251	24

Ampacity based on 310.15 (B) 16 ambient 40C.
All measurements are subject to nominal manufacturing tolerances

Standards

- ASTM B3 and B8
- ICEA S-58-679 Tray cable identification
- ICEA S-95-658 NEMA WC70
- IEEE 1202/FT4 - Flame Test (70,000 Btu/hr Vertical Tray Test)
- UL 44 Thermoset Insulation

Application

- Suitable for use in aerial, direct burial, cable trays, conduit and undergrund duct.
- Sunlight resistant

Drawn by: MD	Quote No:	N/A	Title	4/c #12 Cu, 600 volt XHHW-2 with Ground, interlocked Armor, PVC Jacket	
Approved by: SS	Customer	Omni		Drawing	5200-4C128-6AX-N1123-PBK-AC
Requested by: AC	www.southwire.com	Southwire Company, One Southwire Dr. Carrollton, GA 30119			8/31/2015