Double Jacketed Buried Service Wire

WITH ALUMINUM SHIELD ICEA S-86-634

Spec. 4287

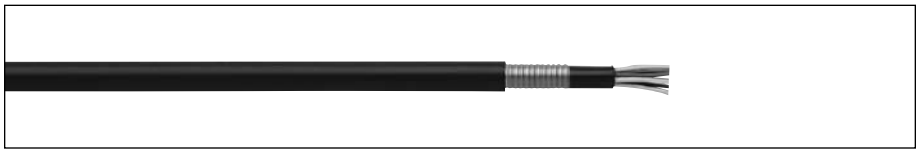

Nominal Cable Data

CATALOG NUMBER	PAIRS AWG	O.D. (INCHES)	WEIGHT (LBS/MFT)	STANDARD LENGTH (FT)
2095138	2/22	0.33	55	1000
2095125	2/22	0.33	55	2500
2095126	2/22	0.33	55	5000
2095127	3/22	0.35	65	2500
2095128	3/22	0.35	65	5000
2095137	6/22	0.41	95	1000
2095129	6/22	0.41	95	2500
2095130	6/22	0.41	95	5000
2095131	2/24	0.30	50	2500
2095132	2/24	0.30	50	5000
2095133	3/24	0.32	55	2500
2095134	3/24	0.32	55	5000
2095135	6/24	0.37	75	2500
2095136	6/24	0.37	75	5000

Data subject to change without notice. Contact your Customer Service Representative for latest information.

Product Construction:

Conductors:
- Solid annealed copper

Insulation:
- High density polyethylene

Pairing:
- Varying pair lays

Core Filling:
- 80˚C filling and flooding compounds

Inner Jacket:
- Linear low density polyethylene

Shield:
- Polymer-coated 0.008" aluminum tape

Rip Cord:
- Under the outer jacket

Outer Jacket:
- Black, linear low density polyethylene

Application(s):
- Intended for use in buried service application to the subscriber loops

Compliance:
- ICEA S-86-634
- RoHS Compliant (effective 1/1/10)

Packaging:
- Standard coils or on non-returnable plywood reels in lengths as shown above

RoHS Compliant Effective 1/1/10

General Cable