
Product Specifications



4172346/40 | 5E25 WHITE REEL 4K

DataPipe® 5E25 Category 5e U/UTP Cable, plenum, white jacket, 25 pair count, 4000 ft length, reel

Cross Section Drawing

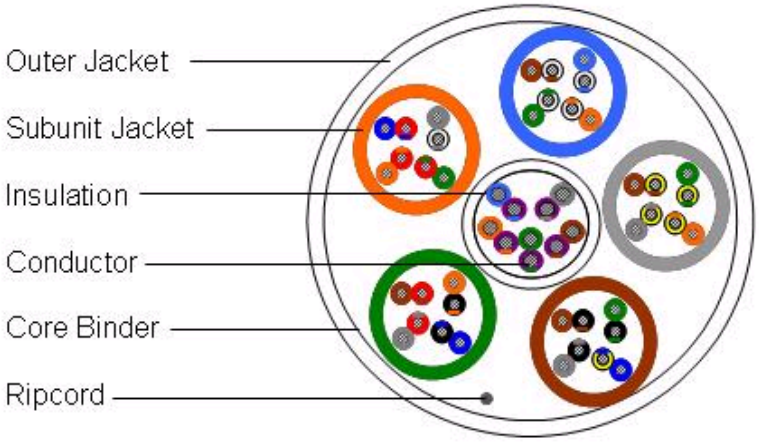

Construction Materials

Conductor Material	Bare copper
Inner Jacket Material	PVC
Insulation Material	FEP
Jacket Material	PVDF
Ripcord Material	Nylon

Dimensions

Cable Length	1219 m | 4000 ft
Cable Length Tolerance	±5%
Cable Weight	167.37 lb/kft
Diameter Over Jacket	14.986 mm | 0.590 in
Jacket Thickness	0.457 mm | 0.018 in

Electrical Specifications

ANSI/TIA Category	5e
dc Resistance Unbalance, maximum	5 %
dc Resistance, maximum	9.38 ohms/100 m
Delay Skew	15 ns
Mutual Capacitance	5.6 nF/100 m @ 1 kHz
Nominal Velocity of Propagation (NVP)	71 %
Operating Frequency, maximum	100 MHz

©2012 CommScope, Inc. All rights reserved. All trademarks identified by ® or ™ are registered trademarks, respectively, of CommScope.
All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: February 19, 2012

Product Specifications

4172346/40 | 5E25 WHITE REEL 4K

Transmission Standards	ANSI/TIA-568-C.2 | CENELEC EN 50288-3-1 | ISO/IEC 11801 Class D
Safety Voltage Rating	300 V
Dielectric Strength, minimum	1500 Vac | 2500 Vdc
Note	All electrical transmission tests include swept frequency measurements

Environmental Specifications

Environmental Space	Plenum
Flame Test Method	CMP
Installation Temperature	0 °C to +60 °C (+32 °F to +140 °F)
Operating Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Smoke Test Method	CMP

General Specifications

Brand	DataPipe® | Uniprise®
Cable Component Type	Backbone
Cable Type	U/UTP (unshielded)
Pairs, quantity	25
Jacket Color	White
Conductor Gauge, singles	24 AWG
Conductor Type, singles	Solid
Conductors, quantity	50
Subunit, quantity	6
Packaging Type	Reel
Product Number	5E25

Mechanical Specifications

Pulling Tension, maximum	68 kg | 150 lb

Regulatory Compliance/Certifications

Agency	**Classification**
RoHS 2002/95/EC	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system

©2012 CommScope, Inc. All rights reserved. All trademarks identified by ® or ™ are registered trademarks, respectively, of CommScope.
All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: February 19, 2012

Product Specifications

4172346/40 | 5E25 WHITE REEL 4K

Electrical Performance

Std	Standard (ANSI/TIA-568)
IL	Insertion Loss (dB/100m)
NEXT	Near End Crosstalk (dB/100m)
ACR	Attenuation to Crosstalk Ratio (dB/100m)
PSNEXT	Power Sum Near End Crosstalk (db/100m)
PSACR	Power Sum Attenuation to Crosstalk Ratio (dB/100m)
ACRF	Attenuation to Crosstalk Ratio - Far End (dB/100m)
PSACRF	Power Sum Attenuation to Crosstalk Ratio – Far End (dB/100m)
RL	Return Loss (dB)

Freq. MHz	IL	NEXT	ACR	PSNEXT	PSACR	ACRF	PSACRF	RL
	Std	Std	Std	Std	Std	Std	Std	Std
1	2.0	65.3	63.3	62.3	60.3	63.8	60.8	20.0
4	4.1	56.3	52.2	53.3	49.2	51.8	48.8	23.0
8	5.8	51.8	46.0	48.8	43.0	45.7	42.7	24.5
10	6.5	50.3	43.8	47.3	40.8	43.8	40.8	25.0
16	8.2	47.2	39.0	44.2	36.0	39.7	36.7	25.0
20	9.3	45.8	36.5	42.8	33.5	37.8	34.8	25.0
25	10.4	44.3	33.9	41.3	30.9	35.8	32.8	24.3
31.25	11.7	42.9	31.2	39.9	28.2	33.9	30.9	23.6
62.5	17.0	38.4	21.4	35.4	18.4	27.9	24.9	21.5
100	22.0	35.3	13.3	32.3	10.3	23.8	20.8	20.1

©2012 CommScope, Inc. All rights reserved. All trademarks identified by ® or ™ are registered trademarks, respectively, of CommScope.
All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: February 19, 2012