
Type TC Power Cable-XHHW

Type TC Power Cable. 600 Volt. Copper Conductors.
XLP Insulated Singles Rated XHHW.
Heat, Moisture, and Sunlight Resistant. Overall PVC Jacket.
RoHS

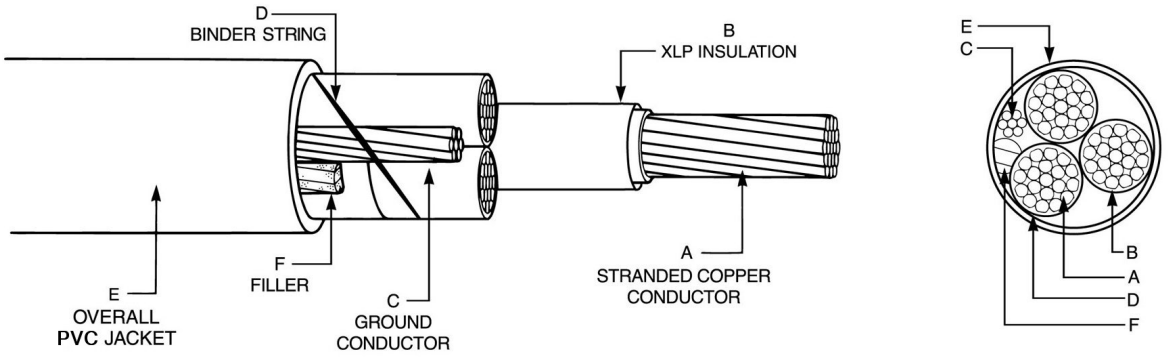

APPLICATIONS

Southwire's Type TC Power Cable is used to supply power to motors, or for connection to other power devices in industrial settings. Primary installations include cable trays, raceways, and outdoor locations where supported by a messenger wire. Type TC Power Cable is listed for direct burial or in underground ducts and for use in Class 1, Division 2 hazardous locations and Class 1 control circuits. This cable may be used in wet and dry locations at temperatures not to exceed 90.

SPECIFICATIONS

- ASTM
- UL 44, 1277 and 1581
- ICEA S-58-679 Method 4
- UL 1685 - Flame Exposure Test
- ICEA T-29-520 - Vertical Cable Tray Flame Test
- IEEE 383 (IEEE 1202/FT4) - Flame Test
- ICEA S-95-658 (NEMA WC 70) construction requirements

CONSTRUCTION

Southwire's Type TC Power Cable is manufactured using Type XHHW-2 conductors. Individual conductors are bare annealed copper covered with a cross-linked polyethylene (XLP) insulation. The overall jacket consists of a flame retardant, moisture and sunlight resistant PVC jacket. Non-halogen jacket available upon request.

Southwire
One Southwire Drive
Carrollton, Ga. 30119 USA

MADE IN THE USA

greenSpec™ RoHS Compliant

Copyright 2010, Southwire Company.
All Rights Reserved.

®Southwire is a registered trademark of Southwire Company.

3c,XHHW/PVC, GW, Type TC Power Cable

Type TC-Power Cable Three XLP (XHHW-2) Conductors With Ground								
Size (AWG or kcmil)	Stranding	Ground Conductor Size (AWG)	Jacket Thickness (inches)	Avg. Overall Diameter		Approximate Weight		Ampacity
				inches	mm	lbs./1000'	kg./km.	90°C
8	7	10	.060	.681	17.3	330	491	55
6	7	8	.060	.766	19.4	468	697	75
4	7	8	.060	.797	20.2	606	901	95
2	7	6	.080	.96	24.4	954	1420	130
1	19	6	.080	1.1	27.9	1173	1746	150
1/0	19	6	.080	1.186	30.1	1421	2115	170
2/0	19	6	.080	1.279	32.5	1704	2536	195
3/0	19	4	.080	1.385	35.2	2135	3177	225
4/0	19	4	.080	1.506	38.2	2580	3839	260
250	37	4	.080	1.653	42	3021	4496	290
300	37	3	.110	1.827	46.4	3684	5481	320
350	37	3	.110	1.935	49.1	4219	6277	350
400	37	3	.110	2.032	51.6	4747	7064	380
500	37	2	.110	2.214	56.2	5755	8564	430
750	61	1	.110	2.663	67.6	8543	12711	535

Note: Ampacities are based on Table 310.16 of the NEC, 2008 Editon. Ampacities are for general use with a 90°C conductor and 30°C ambient temperature as specified in section 310.15 and in cable trays as specified in section 392.11.
Note: Insulation thicknesses are per UL 44 for XHHW conductors. See XHHW Data Sheet for insulation thickness.
6 and 8 AWG constructions with insulated grounds (standard) and 4 AWG and larger with bare or insulated ground are UL Listed for exposed runs (ER) per NEC 336.10 °C.

Southwire
One Southwire Drive
Carrollton, Ga. 30119 USA

MADE IN ★ THE USA

greenSpec™ RoHS Compliant

Copyright 2010, Southwire Company.
All Rights Reserved.

®Southwire is a registered trademark of Southwire Company.