
SIMpull® CT1A - 09ET

5kVU Type MV-105. Aluminum Conductor.
Thermosetting Conductor Shield.
EPR Insulation. Thermosetting Insulation Shield.
Copper Tape Shield.SIMpull ® PVC Jacket.
Sizes AWG 1/0 and Larger Listed for CT Use

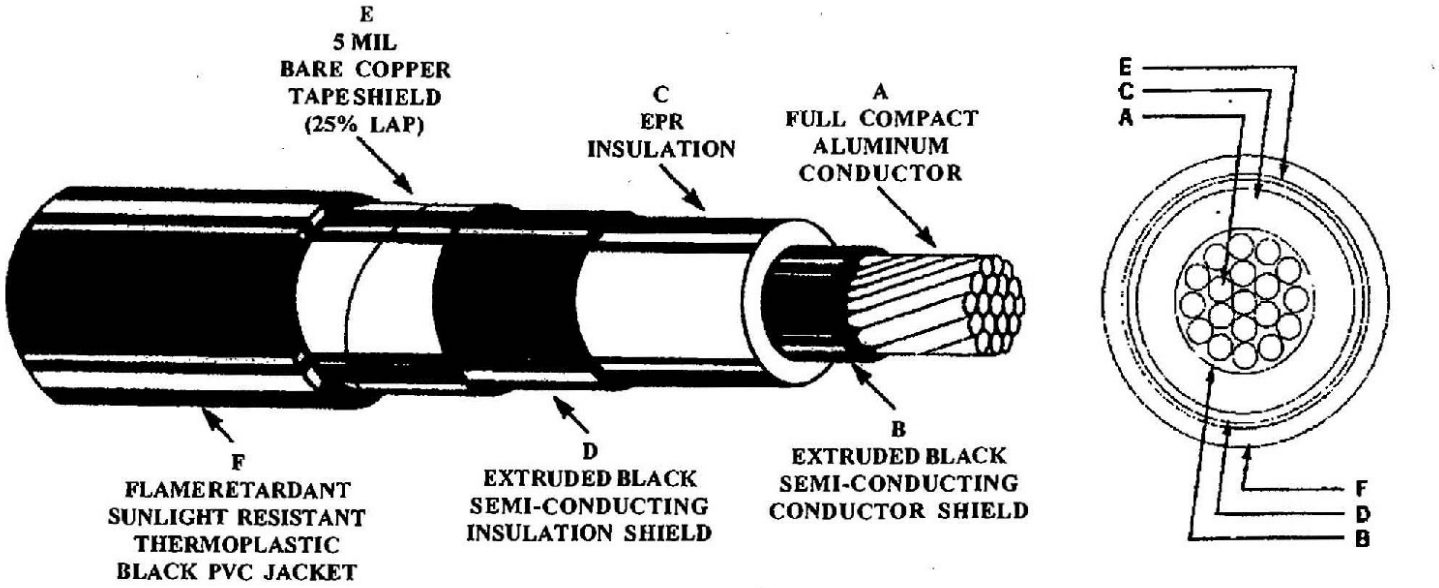

APPLICATIONS

Southwire SIMpull CT1A-09ET Type MV-105 Cable is for use in aerial, direct burial, cable trays, conduit, and underground duct installations as permitted by the National Electrical Code. These cables are capable of operating continuously at a conductor temperature not in excess of 105°C for normal operation, 140°C for emergency overload conditions, and 250°C for short circuit conditions, and are rated at 5,000V, 133% insulation level (ungrounded system). Maximum sidewall pressure is 1000 lbs. This cable can be installed without the need for pulling lubricant.

SPECIFICATIONS

Southwire SIMpull CT1A-09ET Type MV-105 Cable is manufactured and tested in accordance with the latest revisions of the following standards and specification:

- UL 1072 - Medium Voltage Power Cables.
- ICEA S-93-639 (NEMA WC 74) - 5-46 kV Shielded Power Cable for Use in the Transmission & Distribution of Electric Energy.
- ICEA S-97-682 (when requested) 5-46 kV Standard for Utility Shielded Power Cable.
- UL 1685 - (AWG 1/0 and larger) - UL-CT Flame Exposure Test
- IEEE 1202/ FT4 - Flame Test (70,000 Btu/hr Vertical Tray Test) with CPE and Solonon jacket.

Certified qualification tests were performed in accordance with the requirements of AEIC CS-8. Cable has fully met the qualification testing requirements of AEIC CS-8.

CONSTRUCTION

Southwire SIMpull CT1A-09ET Type MV-105 Cable offers our patented SIM (Slikqwik ® Infused Membrane) Technology ® for easier pulling, flexible, easy bending insulation, easy cable preparation, fast stripping thermosetting insulation shield, 105°C continuous operating temperature, 100% shield coverage, and it is triple extruded. Cable is sunlight resistant, suitable for direct burial, and listed for cable tray use in sizes 1/0 and larger. SOLONON™ low smoke, non halogen polyolefin jackets and

SouthwireNoLube™
One Southwire Drive
Carrollton, Ga. 30119 USA

MADE IN ★ THE USA

Copyright 2003, Southwire Company.
All Rights Reserved.

®Southwire is a registered trademark of Southwire Company.

CT1A-09ET 1c, 5/8kV, 115mil EPR(133/100%), TS, PVC, CT Rated

CPE jackets are available upon request..

Product Code	Size	Conductor Diameter		0.115" (2.92mm) Insulation Diameter		Extruded Insulation Shield Diameter		Min. Point Jacket Thickness		Approximate Overall Diameter		Approximate Net Weight		Allowable Ampacities+	
	AWG or kcmil	inch*	mm	inch**	mm	inch***	mm	inch	mm	inch	mm	lb./Mft.	kg/km	Duct	Conduit In Air
C1A-09ET-002	2	.268	5.34	.504	12.80	.560	14.22	.06	1.52	.696	17.67	272	405	125	115
C1A-09ET-001	1	.299	7.59	.534	13.56	.590	14.98	.06	1.52	.726	18.44	300	446	140	135
C1A-09ET-010	1/0	.336	8.53	.571	14.48	.627	15.93	.06	1.52	.763	19.4	340	506	160	155
C1A-09ET-020	2/0	.376	9.55	.609	15.48	.667	16.94	.06	1.52	.803	20.40	383	570	185	175
C1A-09ET-030	3/0	.423	10.74	.654	16.62	.712	18.08	.07	1.77	.879	22.34	460	685	210	210
C1A-09ET-040	4/0	.475	12.06	.704	17.88	.762	19.35	.07	1.77	.929	23.59	520	773	245	240
C1A-09ET-250	250	.520	13.21	.762	19.35	.820	20.83	.07	1.77	.987	25.07	586	872	270	280
C1A-09ET-350	350	.616	15.64	.857	21.76	.915	23.24	.07	1.77	1.08	27.43	724	1077	325	340
C1A-09ET-500	500	.736	18.69	.959	24.35	1.035	26.28	.07	1.77	1.20	30.53	921	1370	400	425
C1A-09ET-750	750	.908	23.06	1.14	28.99	1.22	30.92	.07	1.77	1.38	35.16	1249	1859	505	545
C1A-09ET-100	1000	1.06	26.92	1.29	32.80	1.36	34.73	.07	1.77	1.53	38.97	1555	2315	590	645

*Nominal diameter per ASTM Standards. **±0.030" ***±0.050"

+Ampacities are based on the NEC, 2008 Edition. Duct ampacities are based on Table 310.78 three conductors in one underground duct, 105°C conductor, 20°C earth ambient temperature. Conduit in air ampacities are based on Table 310.74 three cables in isolated conduit in air, 105°C conductor, 40°C ambient temperature.

Scope: This specification covers single conductor EPR (ethylene propylene rubber) insulated, shielded, thermoplastic jacketed power cable for use in aerial, direct burial, cable trays, conduit, and underground duct installations. This cable is capable of operating continuously at a conductor temperature not in excess of 105°C for normal operation, 140°C for emergency overload conditions, and 250°C for short circit conditions, and is rated at 5,000 V, 133% insulation level (ungrounded system).

Standards: The following standards shall form a part of this specification - UL Standard 1072 for Medium Voltage Power Cable and ICEA S-93-639 (NEMA WC 74) 5-46 kV Shielded Power Cable for Use in the Transmission & Distribution of Electric Energy.

Conductor: The conductor shall be Class B compressed compact aluminum in accordance with ASTM specs B800 and B801 and ICEA Part 2, Section 2.1 and 2.5.

Conductor Shield: The conductor shall be shielded with an extruded semi-conducting thermosetting polymeric layer over the conductor, applied in tandem with and firmly bonded to the insulation.

Insulation: The insulation shall be EPR (ethylene propylene rubber) meeting the requirements of the referenced standards. The nominal thickness shall be 0.220".

Insulation Shield: The insulation shall be shielded with an extruded layer of semi-conducting thermosetting material which shall be identified as being semi-conducting. Over this layer shall be applied a helically-wrapped 5-mil copper tape with 25% overlap.

Jacket: The cable shall be provided with a jacket of black sunlight resistant PVC conforming to the requirements specified for polyvinyl chloride jackets in ICEA. The average thickness shall be in accordance with Table 7-3 of ICEA. Optional SOLONON low smoke, non halogen polyolefin jackets and CPE jackets are available upon request.

Identification: Cable shall be identified by surface printing on the jacket.

Tests: Qualification tests shall be conducted in accordance with the requirements of AEIC.

SouthwireNoLube™
One Southwire Drive
Carrollton, Ga. 30119 USA

MADE IN ★ THE USA

Copyright 2003, Southwire Company.
All Rights Reserved.

®Southwire is a registered trademark of Southwire Company.