
Loose Tube Single Jacket Riser Cable


Type OFNR, CSA

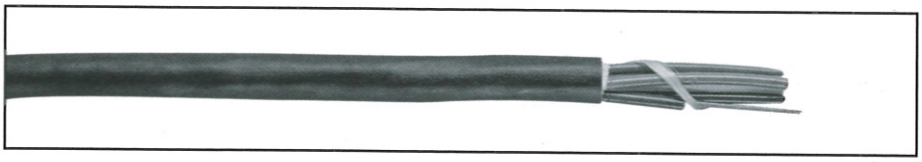

CATALOG NUMBER	FIBER COUNT	NO. OF LOOSE TUBES	NOMINAL CABLE DIAMETER		NOMINAL CABLE WEIGHT		MAXIMUM TENSILE LOAD			
							INSTALLATION		IN-SERVICE	
			IN	mm	LBS/1000'	kg/km	LBS	N	LBS	N
XX0023M1M-DT	2	2	0.36	9	52	78	600	2670	200	890
XX0044M1M-DT	4	1	0.36	9	53	79	600	2670	200	890
XX0064M1M-DT	6	1	0.36	9	53	80	600	2670	200	890
XX0084M1M-DT	8	2	0.36	9	52	78	600	2670	200	890
XX0124M1M-DT	12	2	0.36	9	52	78	600	2670	200	890
XX0184M1M-DT	18	3	0.36	9	52	77	600	2670	200	890
XX0244M1M-DT	24	4	0.36	9	51	76	600	2670	200	890
XX0364M1M-DT	36	6	0.38	10	58	86	600	2670	200	890
XX0484M1M-DT	48	4	0.42	11	64	96	600	2670	200	890
XX0604M1M-DT	60	5	0.42	11	62	92	600	2670	200	890
XX0724M1M-DT	72	6	0.45	12	75	112	600	2670	200	890
XX0964M1M-DT	96	8	0.57	14	109	162	600	2670	200	890
XX1444M1M-DT	144	12	0.69	17	169	251	600	2670	200	890

XX Denotes glass type.
A complete listing of NextGen® Brand glass types is specified on page 3 of this catalog.

Typical Cross-Section

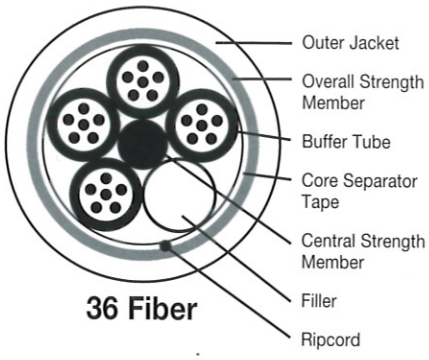

Hybrid designs (containing singlemode and multimode fiber) and composite designs (containing copper conductors) are also available.

For complete listing of all fiber counts offered, please contact your General Cable sales representative.

Ordering Part Number Example

CG0124M1M-DT

62.5 mm multimode, 12 fibers, loose tube riser
Please see pages 4 and 5 for a complete guide on part number selection and ordering information.

Product Construction:

Fiber:

- 2–144 fibers
- Dry loose tube with Super Absorbent Polymer
- Color-coding per TIA/EIA 598B

Central Strength Member:

- Epoxy/glass rod

Overall Strength Member:

- Aramid fiber yarn

Jacket:

- CPE black UV-, moisture-resistant and flame-retardant polymer material
- Sequential footage markings*

Options:

- Interlock steel or aluminum (-ILR or -ILRA)
- Dry Water Block cable core for ease of handling (gel)

Features:

- Dry loose tube for ease of termination
- Riser rated for indoor applications

Performance:

- Temperature:
  Storage -40°C (-40°F) to +70°C (+158°F)
  Operating -40°C (-40°F) to +70°C (+158°F)
- Minimum Bend Radius:
  20 X OD—Installation
  10 X OD—In-Service
- Maximum Crush Resistance:
  150 lbs/in (263 N/cm)
- Maximum Vertical Rise—1,640 ft (500 m)

Applications:

- Interbuilding and intrabuilding voice or data communication backbones
- Installed in ducts, underground conduits or aerial/lashed
- ETL Listed Type OFNR for installation in vertical riser and general horizontal applications when installed in accordance with NEC article 770-51 (b) and 770-53 (b)

Compliances:

- ETL and c(ETL) Listed Type OFNR
- ICEA S-104-696

*Sequential meter markings available upon request

NEXTGEN® BRAND

General Cable

Fiber Optic Part Number System

Example: AP0121PNU-ILPA
Singlemode, 12 Fibers, Tight Buffer Distribution Plenum, Interlock Armor Plenum Aluminum

A	P	0	1	2	1	P	N	U	ILPA
1	2	3	4	5	6	7	8	9	[SUFFIX]

Fiber Grade — Position 1, 2

In position 1
A: Singlemode (sm)
B: 50 MM Multimode (mm)
C: 62.5 MM Multimode (mm)
For position 2, reference pages 2 and 3 for fiber specifications and grades.

Requested Fiber Count — Position 3, 4, 5

Standard Offerings:
6 12 24 36 48 72

Buffer Construction — Position 6

1) Tight Buffer; 2) Quick Strip; 3) Single Fiber Loose Tube (Gel-filled); 4) Multi-Fiber Loose Tube (Gel-Filled); 5) Loose Buffer; 6) Bare/Ribbon

Suffixes

- **BK** Black Jacket (UV Resistant)
- **DWB** Dry Water Block Cable Core
- **DT** Dry Tube
- **ILP** Interlock Armor Plenum Steel
- **ILPA** Interlock Armor Plenum Aluminum
- **ILPAS** Interlock Armor Plenum Aluminum w/Sub-Units
- **ILPS** Interlock Armor Plenum w/Sub-Units
- **ILR** Interlock Armor Riser Steel
- **ILRA** Interlock Armor Riser Aluminum
- **ILRAS** Interlock Armor Riser Aluminum w/Sub-Units
- **ILRS** Interlock Armor Riser w/Sub-Units
- **LS** ADSS Long Span
- **MS** ADSS Medium Span
- **RIP** Ripcord
- **SS** ADSS Short Span

Series Type — Position 7, 8, 9

Outdoor:

UNFS: Central Tube SJ Armored
M1A: Loose Tube SJ
H1A: Loose Tube DJ
M1F: Loose Tube SJ Armored
H1F: Loose Tube DJ Armored
H1S: Loose Tube DJ Dual Armor
M1Y: Loose Tube SJ Self-Supporting
M1N: Loose Tube SJ Armored Self-Supporting
R1A: Loose Tube SJ Ribbon cable

Indoor:

PNR/P1R: Tight Buffer Distribution Riser
PNU/P1D: Tight Buffer Distribution Plenum
B3R: Tight Buffer Breakout Riser
B3D: Tight Buffer Breakout Plenum
PNZ/P1Z: Tight Buffer Distribution LSZH

Indoor/Outdoor:

ANR/A1R.BK: Tight Buffer Distribution Riser
ANU/A1D: Tight Buffer Distribution Plenum
UNU: Central Tube SJ Plenum
M1D: Loose Tube SJ Plenum
M1M: Loose Tube Single Jacket Riser
H1M: Loose Tube DJ Riser – Chemical-Resistant
M1Z: Loose Tube SJ LSZH
H1L: Loose Tube DJ Armored LSZH

Note: DJ = Dual Jacket
Note: SJ = Single Jacket

NEXTGEN® BRAND

General Cable

Optical Fiber Code Cross-Reference

Fiber Type	General Cable	Corning® Optical Fiber	Description
Standard Loose Tube SM	AQ	SMF-28e+™	Full spectrum, low water peak singlemode
Performance Loose Tube SM	AT	SMF-28e+™	Full spectrum, high performance low water peak singlemode with 0.35/0.25 attenuation
Tight Buffer SM	AP	SMF-28e+™	Full spectrum, low water peak singlemode with 900µm PVC buffer
Long Haul SM	AL	LEAF®	Large A_{eff}, low water peak, NZ-DSF singlemode
62.5 µm MM	CG	InfiniCor® 300	1 Gb/s ≥ 300 m at 850 nm, OM1* 1 Gb/s ≥ 550 m at 1300 nm
62.5 µm MM	CL	InfiniCor® CL™ 1000	1 Gb/s ≥ 500 m at 850 nm, OM1* 1 Gb/s ≥ 1000 m at 1300 nm
50 µm MM	BG	InfiniCor® 600	1 Gb/s ≥ 600 m at 850 nm, OM2*
50 µm MM	BI	InfiniCor® SXi	10 Gb/s ≥ 150 m at 850 nm, OM2* 1 Gb/s ≥ 750 m at 850 nm
50 µm MM	BE	InfiniCor® SX+	10 Gb/s ≥ 300 m at 850 nm, OM3* 1 Gb/s ≥ 1000 m at 850 nm
50 µm MM	BL	InfiniCor® eSX+	10 Gb/s ≥ 550 m at 850 nm, OM3* 1 Gb/s ≥ 1000 m at 850 nm
50 µm MM	BM	InfiniCor® eSX+	10 Gb/s ≥ 600 m at 850 nm, OM3* 1 Gb/s ≥ 1000 m at 850 nm

* Designation per ISO 11801 Fiber Standards

SMF-28e+ is a trademark and Corning, LEAF, InfiniCor and Plus Corning Optical Fiber are registered trademarks of Corning Incorporated, Corning, NY, U.S.A.