GenSPEED® 5000 Category 5e Backbone 25 Pair Cable

Features And Benefits
- Connects all systems of a multi-level distributed system to an intermediate system
- Sequential footage markings

Applications
- 1000 BASE-T (Gigabit Ethernet)
- 100/10 BASE-T
- 100 VG-AnyLAN
- 52/155 Mp/s ATM
- 4/16 Mb/s Token Ring
- T1
- Voice

Standard Compliances
- ANSI/TIA/EIA 568 B.2
- ANSI/ICEA S-90-661 (Category 5e)
- NEC/CEC Type CMR (UL 1666) for Non-Plenum
- NEC/CEC Type CMP (NFPA 262) for Plenum
- RoHS Compliant Directive 2002/95/EC
- UL 444

VERIFIED LISTED TIA/EIA 568C

RoHS Compliant Directive 2002/95/EC



CONSTRUCTION

Conductors
- 25 pairs of 24 AWG solid bare annealed copper

Insulation
- Non-Plenum: Polyolefin
- Plenum: Fluoropolymer

Color Code
- See Color Code Chart on page 94, except no bandmarking; only solid colors

Rip Cord
- Applied longitudinally under jacket

Jacket
- Non-Plenum: Flame-retardant PVC
- Plenum: Low-smoke, flame-retardant PVC

Separator
- Non-Plenum: N/A
- Plenum: Core filler

PHYSICAL DATA

	CMR (Non-Plenum)	CMP (Plenum)
Nominal Cable Diameter (in)	0.500	0.500
Nominal Cable Weight (lbs/1000 ft)	125	160
Temperature Rating (°C)		
Installation:	0 to +60	0 to +60
Operation:	-20 to +75	-20 to +75

PART NUMBERS

Standard packaging: 1000' Reel

Jacket Color	Reel CMR (Non-Plenum)	Reel CMP (Plenum)
Blue	**2133694E**	**2131753E**
White	**2133781E**	**2131550E**
Gray	**2133269E**	**2131752E**


Data subject to change without notice.

ELECTRICAL PERFORMANCE

Frequency MHz	Insertion Loss (max)	PSNEXT (min)	NEXT (min)	PSACRF (min)	Return Loss (min)
0.772	1.8	64.3	67.3	63.0	—
1	2.0	62.3	65.3	60.8	20.0
4	4.1	53.3	56.3	48.7	23.0
8	5.8	48.3	51.3	42.7	24.5
10	6.5	47.3	50.3	40.8	25.0
16	8.2	44.3	47.3	36.7	25.0
20	9.3	42.3	45.3	34.7	25.0
25	10.4	41.3	44.3	32.8	24.3
31.25	11.7	39.3	42.3	30.9	23.6
62.5	17.0	35.3	38.3	24.8	21.5
100	22.0	32.3	35.3	20.8	20.1

Note: Values are expressed in dB per 100 m (328 ft.) length.

GenSPEED® 5000 CATEGORY 5e BACKBONE 25 PAIR CROSS-SECTION

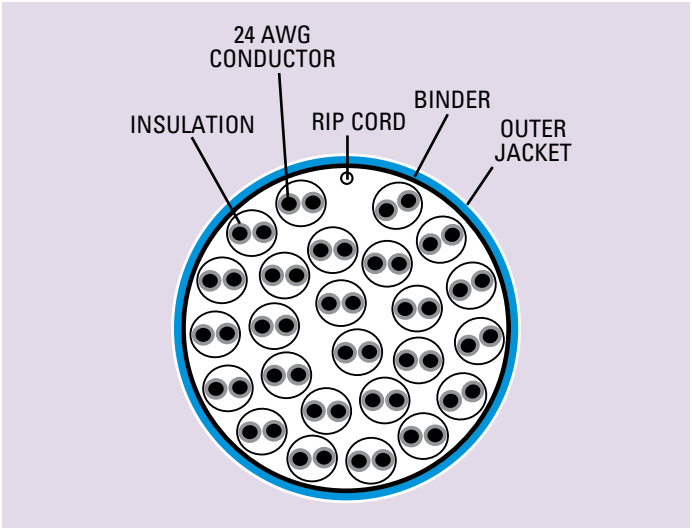

ELECTRICAL CHARACTERISTICS

DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	9.38
Mutual Capacitance (nom) pF/ft @ 1 KHz	14
Delay Skew (max) ns/100 m	45
Propagation Delay (max) ns @ 100 MHz	CMP: 518 CMR: 538
Nom. Velocity of Propagation (NVP) % Speed of Light	CMP: 72 CMR: 68
Characteristic Impedance Frequency (f): 1-100 MHz	Ohms 100 ± 15