


Integrated Solution



CIDC SERIES

All-In-One Intelligent Data Center Solution – comes with usable rack space, critical power management & distribution, EMS system and other key accessories, served by CITEC's cooling system under one enclosure unit.

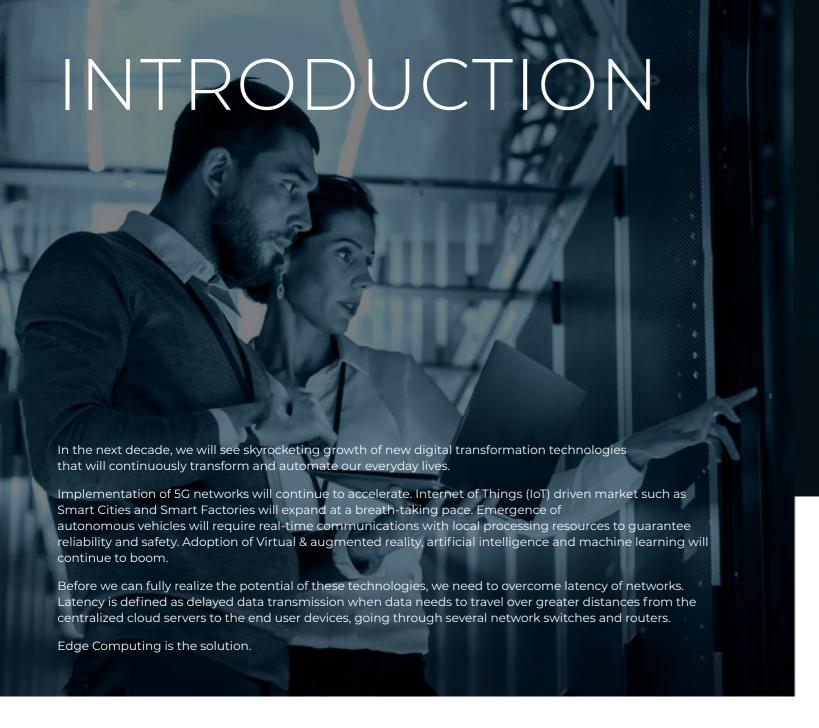



PRODUCT FEATURES

- All-in-One Data Center configuration.
- Fast deployment with "plug and play" concept.
- Swift installation with modular construction concept and pre-assembled modules.
- Customizable and suitable for low to medium dense application.
- Cost-effective solution with high scalability for future expansion.
- High flexibility suitable for non-data center or IT environment.
- High efficiency cooling operation within containment system eliminates hot and cold air mixing.
- Compatible with common racks in the market.

WHAT IS EDGE COMPUTING

Edge computing can be classified as a solution that facilitates data processing at/or near the source of data generation. Instead of bringing the users and devices to the data center, we bring the power of the data center to the users and devices. By bringing IT resources closer to the end users and devices they serve, high-speed, low-latency processing of applications and data can be achieved.

About 10% of enterprise-generated data is created and processed outside a traditional centralized Data Center or Cloud. By 2025, Gartner predicts this figure will reach 75%. (Gartner, 2018)

ADVANTAGE OF EDGE COMPUTING

- Low Network Latency increasing speed and performance
- Compliance to Data Sovereignty
- Reduce Bandwidth Costs
- System Availability

Adoption of edge computing drives the demand for smaller scale, mini data centers. Edge data centers consists of all the key components of a traditional data center housed within a small footprint.

TARGETED APPLICATION







Medium to Large sized Enterprise



Colocation service providers

1 CIRC / CIDC / CSR

SINGLE ROW CONFIGURATION

- Integrated with 19" 42U IT Rack with compliance to EIA-310-D standard.
- Option for Direct Expansion (DX) or Chilled Water row cooling system.
- Built-in power management and distribution system.
- Integrated with EMS system with 10" colour touch screen display, equipped with PUE monitoring function and 3D dynamic interface.
- Option for built-in UPS and battery.
- Enhanced security feature with individual locking system and built-in emergency exhaust.
- Built in dual-colour LED lighting for normal operation and alarm triggered indication.



TECHNICAL SPECIFICATIONS

SPECIFICATIONS	
Dimensions (L x D x H)	L x (Rack Depth + 400mm) x 2000mm;
	L < 6m
Power Supply	380~415Vac, 3P+N+E, 50/60Hz
RACK	
Dimensions (L x D x H)	600mm X 1100mm X 2000mm; 600mm X 1200mm X 2000mm
Compliance	EIA-310-D, BS15954, IEC197-2, and EIN4194
Space	42U

Door	Front Single, Rear Single	
	Individual Locking System	
	Fully Seal	
Material	Cold Roll Steel	
Withstand Weight (Static)	1800KG	
Colour	RAL9005 (Black) / RAL9003 (White)	
Protection Level	IP20	
Accessory (Optional)	Side Panel, Equipment Rail, Equipment Tray, Cable Management Plate,	

AISLE	
Containment	Fully Contain, Cold Aisle/Hot Aisle Separated
Emergency Exhaust	Automatic Release During Emergency via Magnetic Release, Manual Restoration
Lighting	Embedded LED Light, Illumination 200lm
Accessory	Filler Panel, Temperature and Humidity Sensors, Smoke Detector, Door Sensor and Locking System, Audible Visual Alarm, Water Detection System, Overhead Busway System

Input	63A-125A, MCCB/MCB				
Output	A/B Source Output, 30~60 Branch				
Power Monitoring	3PH Voltage, 3PH Current, Frequency, Power Factor, Real Power, Reactive Power				
COOLING SYSTEM					
Cooling Capacity ¹	20,25,30,40kW (Air Cooled); 30, 50kW (Chilled Water)				
Airflow ²	4750~9580 m³/h				

Dimensions (L x D x H) 300mm x 1100mm x 2000mm; 600mm x 1100mm x 2000mm; 300mm x 1200mm x 2000mm; 600mm x 1200mm x 2000mm; Airflow Configuration Horizontal Flow Air Filter G3, Washable Cooling Control Modulation Humidifier (Optional) Evaporative Humidifier Heater PTC Heater Display 4.3" Colour Touch Screen BMS Built-in RS485 Modbus Top/Bottom Piping and Power Entry; Dual Power Source with Built-in ATS; Condensate Pump Optional item

ENVIRONMENT MONITORING SYS	БТЕМ
Display	10" Colour Touch Screen
Display Language	English/Chinese
System Monitoring	Aisle Temperature & Humidity, Cooling System, Power Management System, UPS System, Smoke Detector, Water Detection
PUE Monitoring	Live PUE Monitoring & History PUE Monitoring
Alarm Log	500 Events

UPS AND BATTERIES MODULE (OPTIONAL)	
Input Voltage	380~415Vac, 3P+N+E, 50/60Hz
Input Power Factor	Up to 0.95 at Linear Load
Display	Status LED+LCD Display
UPS Module Dimensions (L x D x H)	440mm x 750mm x 5U
Capacity	20kVA per module
Protection	Overload Capacity, Short Circuit, EPO, Over Temperature
Compliance	Safety Standard-EN62040-1-1, EMC Standard-EN62040-2, CE Mark
Batteries Module Dimensions (L x D x H)	440mm x 680mm x 3U
Built-In Batteries	20 x 12V 9Ah
Batteries Type	Sealed Lead Acid Maintenance Free
Backup Time	15 minutes @ 20kVA Load With 3 x Batteries Modules


NOTES

1. Cooling capacity is based on 35°C, 23.8%RH, R410A refrigerant, 45°C condensing temperature.

3 CIRC/CIDC/CSR

DUAL ROW CONFIGURATION

- Integrated with 19" 42U IT Rack with compliance to EIA-310-D standard.
- Option for Direct Expansion (DX) or Chilled Water row cooling system.
- Option for Cold Aisle and Hot Aisle Containment.
- Built-in power management and distribution system.
- Integrated with EMS system with 10" colour touch screen display, equipped with PUE monitoring function and 3D dynamic interface.
- Option for built-in UPS and battery.
- Built-in magnetic locking roof with automatic rotating mechanism for entry of fire suppression gas during power outage; equipped with one-click restoration control.
- Automated electric sliding door with fingerprint recognition and ID card security access.
- Built in dual-colour LED lighting for normal operation and alarm triggered indication.

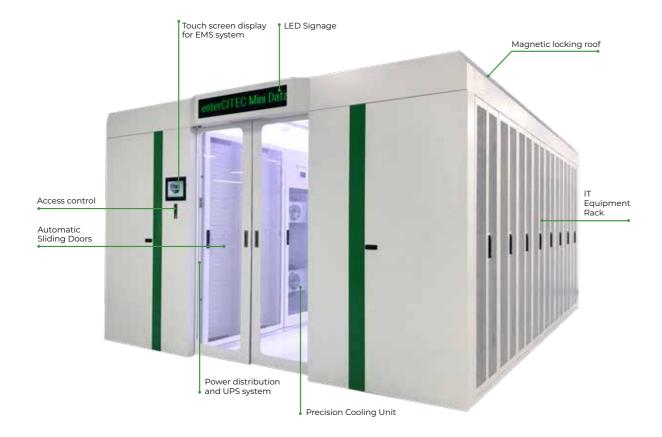

TECHNICAL SPECIFICATIONS

SPECIFICATIONS	
Dimensions (L x D x H)	(L + 430mm) x (Rack Depth x 2 + 1200mm) x
	2250mm; L < 15m
Power Supply	380~415Vac, 3P+N+E, 50/60Hz
RACK	
Dimensions (L x D x H)	600mm X 1100mm X 2000mm; 600mm X 1200mm X 2000mm
Compliance	EIA-310-D, BS15954, IEC197-2, and EIN4194
Space	42U
Door	Front Single, Rear Double
500.	Individual Locking System
	Opening Ratio 76%

Withstand Weight (Static)

Colour

RAL9005 (Black) / RAL9003 (White)

Protection Level

IP20

Accessory (Optional)

Side Panel, Equipment Rail, Equipment Tray, Cable Management Plate,

1U Blanking Plate, Rack Mount PDU (16/32A-8~24 Slot)

AISLE		
Containment	Cold Aisle Containment/Hot Aisle Containment Configurable	
Roof Material	Tempered Glass with Aluminium Frame	
Magnetic Locking Roof	Automatic Release During Emergency via Magnetic Release with Rotate Downward Mechanism Automatic Restoration with Motorized Control	
Lighting	Embedded LED Light, Illumination 300lm	
LED Signage	Included, Wording Changeable	
Doorways	Automatic Sliding Door	
Access Control	Keypad/ID Card/Fingerprint	
Accessory (Optional)	Filler Panel, Temperature and Humidity Sensors, Smoke Detector, Door Sensor and Locking System, Audible Visual Alarm, Water Detection System, Overhead Busway System	

Input	160A/250A, MCCB/Dual Source ATS
Output	A/B Source Output, 30~60 Branch
Power Monitoring	3PH Voltage, 3PH Current, Frequency, Power Factor, Real Power, Reactive Power, Branch Power Status
COOLING SYSTEM	
Cooling Capacity ¹	20,25,30,40kW (Air Cooled) ; 30,50kW (Chilled Water)
Airflow ²	4750~9580 m³/h

Dimensions (L x D x H) 300mm x 1100mm x 2000mm; 600mm x 1100mm x 2000mm; 300mm x 1200mm x 2000mm; 600mm x 1200mm x 2000mm; Airflow Configuration Horizontal Flow Air Filter G3, Washable Cooling Control Modulation Humidifier (Optional) Evaporative Humidifier Heater PTC Heater Display 4.3" Colour Touch Screen BMS Built-in RS485 Modbus Optional item Top/Bottom Piping and Power Entry; Dual Power Source with Built-in ATS; Condensate Pump

ENVIRONMENT MONITORING SYSTEM		
Display	10" Colour Touch Screen	
Display Language	English/Chinese	
System Monitoring	Aisle Temperature & Humidity, Cooling System, Power Management System, UPS System, Smoke Detector, Water Detection	
PUE Monitoring	Live PUE Monitoring & History PUE Monitoring	
Alarm Log	500 Events	

UPS AND BATTERIES MODULE (OPTIONAL)	
Input Voltage	380~415Vac, 3P+N+E, 50/60Hz
Input Power Factor	Up to 0.95 at Linear Load
Display	Status LED+LCD Display
UPS Module Dimensions (L x D x H)	440mm x 750mm x 5U
Capacity	20kVA per module
Protection	Overload Capacity, Short Circuit, EPO, Over Temperature
Compliance	Safety Standard-EN62040-1-1, EMC Standard-EN62040-2, CE Mark
Batteries Module Dimensions (L x D x H)	440mm x 680mm x 3U
Built-In Batteries	20 x 12V 9Ah
Batteries Type	Sealed Lead Acid Maintenance Free
Backup Time	15 minutes @ 20kVA Load With 3 x Batteries Modules

NOTES

1. Cooling capacity is based on 35°C, 23.8%RH, R410A refrigerant, 45°C condensing temperature.

5 CIRC/CIDC/CSR 6

CIRC SERIES

CITEC INTELLIGENT RACK COOLING


CITEC CIRC series is a pre-assembled self-contained solution integrated with key Data Center components within a compact rack unit including precision cooling, power management, and environment monitoring system, designed for Edge applications.

PRODUCT FEATURES

- All-in-one pre-configured and standalone Data Center solution.
- Swift deployment with Plug & Play concept.
- Built in user friendly large 10" colour touch panel display.
- Option for integrated cooling or split cooling condenser.
- Option for built in UPS and battery.
- Eliminate the need of raised floor or IT room environment.
- High security feature with individual locking system.
- Low total cost of ownership.

TARGET APPLICATION







Branch offices of government or financial institutions (Banks, Insurance)



Exchange offices or Hubs of Telco's



Manufacturing & Retail

POWER MANAGEMENT UNIT

- Rack Mount, occupies 3U space.
- Integrated input and output power distribution management with lightning protection.

Built in PMU system; UPS and battery is optional.



UPS

- High performance redundancy 3kVA or 6kVA on-Line UPS.
- Designed and sized to match with CITEC CIRC system.
- Comes in a set of UPS module and battery module with single phase power supply.
- Occupies 2U and 5U space respectively for 3kVA and 6kVA.

IT RACK SYSTEM

- 19" 42U fully enclosed rack complied to industry standard EIA-310-D.
- Durable Rack with withstand static load of 1800kg.
- Fully enclosed IT Rack with Tempered Glass.

Emergency Exhaust



TOUCH SCREEN DISPLAY FOR EMS SYSTEM

- Integrated with intelligent environment monitoring and power management unit to manage operation of key system measurables.
- Easy access and monitoring with 10" Colour Touch Screen display.



PRECISION COOLING UNIT

- High efficiency direct expansion cooling system with 3.5kW cooling.
- Occupies 6U for Split Heat Rejection Unit and 11U for Integrated Heat Rejection Unit.

7 CIRC/CIDC/CSR



Technical Specifications

SPECIFICATION		CIRC-S	CIRC-I	
Rack Dimension (L x D x H)	mm	600 x 1200 x 42U	600 x 1400 x 42U	
Usable Space - With 6kVA UPS Option ¹		28U	23U	
Usable Space – With 3kVA UPS Option ¹		31U	26U	
Usable Space – Without UPS Option ¹		33U	28U	
Power Supply	V/PH/Hz	220	-240/1/50	
Maximum IT Equipment Load	kW		3	
Colour ²		RAL 9005 Black		
PRECISION COOLING UNIT		CIRC-S	CIRC-I	
Cooling Unit Dimension (L x D x H)	mm	440 x 800 x 6U	440 x 1150 x 11U	
Cooling System		Direct Expa	nsion Air Cooled	
Heat Rejection Unit for Cooling Unit		Split	Integrated	
Rated Cooling Capacity ³	kW	3.5	3.5	
Rated Airflow ⁴	m³/s	0.21	0.25	
Rated Power Consumption	kW	1.63	1.76	
Rated Current	А	7.54	8.24	
POWER MANAGEMENT UNIT				
Installation and Dimension		Rack n	nounted, 3U	
Power Distribution	40A Input; 25A/2P for UPS Input, Output and Bypass; 20A/2P for Precision Cooling Unit; 2 x 16/1P for PDU; 1 x 10/1P Spare.			
Power Monitoring			Irrent and Power	
Power Output	12VDC for LED Lightning and Emergency System			
ENVIRONMENTAL MONITORING SYSTEM				
Display Panel				
Precision Cooling Unit Monitoring		E	Built-In	
UPS Monitoring	Built-In			
POWER DISTRIBUTION UNIT (OPTIONAL)				
Rack Mount PDU	16A, 12 Gang IEC320 C13			
3KVA UPS AND BATTERIES MODULE (OPTIONAL)				
UPS Module Dimension (L x D x H)	mm 440 x 600 x 2U			
Built-In Batteries	6 x 12V 9Ah			
Backup Time	3 minutes @ Full Load			
6KVA UPS AND BATTERIES MODULE (OPTIONAL)				
UPS Module Dimension (L x D x H)	mm	440	x 685 x 2U	

440 x 685 x 3U

20 x 12V 7Ah

15 minutes @ Full Load

- Usable space is remaining space after include precision cooling unit, power management unit
 Optional for others colour, please consult factory for colour option.
- 3. Cooling capacity is based on 35°C, 23.8%RH, R410A refrigerant, 45°C condensing temperature. 4. Airflow based on external static pressure: 20Pa.

Batteries Module Dimension (L x D x H)

Batteries Module Info

Backup Time

CSR SERIES

Citec offers high-quality server racks for both 600mm and 800mm width with the availability of either 1100mm or 1200mm for lenght.

The rack meets the industry standards (EIA-310-D) for 19-inch rack-mounted equipment (i.e., server, voice equipment, data, network, internet, and power products), which is mainly used in professional medium to large-sized data centers. The products are fully compatible with the requirement of a building modular cold aisle and hot aisle containment.

The products also have a high load capacity and a static load ≤1800kg. The design and production meet the international industry certification standards: BS15954, IEC197-2, and EIN4194.

PRODUCT SPECIALTIES

Advanced Thermal Management Technology

- Perforated front and rear door with high-density hexagon hole design to optimize airflow
- Provide up to 76% of opening ratio for optimum airflow which is the highest in the industry
- 20-inch² free opening area per U space
- Fully meets the demand to keep the server cool

Advanced Rack Structure

- 19" standard width in the rack, and the mounting are adjustable (back and forth)
- The top and bottom of rack may be removed easily for accessibility
- The reversible front door may be opened from the left or right to accommodate various rack applications and rooms
- Fully supports top wiring system

Rack Modular Construction Application

- Fast assembly, high-precision rack structure of superior quality
- Mounting holes are located on top of the rack, suitable for modular hot and cold aisles containment
- Ability to accommodate various needs and may be adjusted accordingly to fit the application


Rack Cable Management

- Up to 12 cable entries for high-density cable assemblies
- The cabling holes are ready and covered by removable plastic protective cover plates
- The cable management panels or cable troughs located at the rear of the rack enables easy wiring



CIRC/CIDC/CSR 10 9 CIRC / CIDC / CSR

NOMENCLATURE

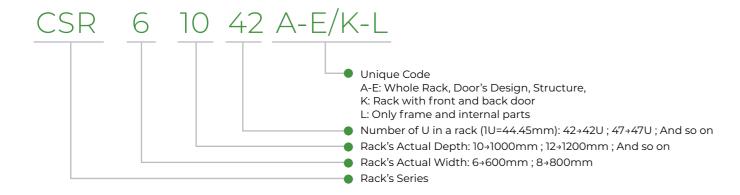

Model


Unique Code (Blank)

→ It is a standard rack loaded with a full set of standard accessories and standard packaging.

Unique Code (A/B/C/D/E) → Different designs of frame door.

Unique Code (K/L)

→ The rack only comes with the frame. No front, back, side door or casters will be included.



M7 Hexagon Hole High-Density Door



M5 Round Hole High-Density Door

Note

Currently the high-density door is fitted with Hexagon-Hole. High-density door with Round-Hole will only be produced once specified in the order form

PRODUCT SELECTION TABLE

SAFE AND RELIABLE (SERVICE) RACK

Exterior	CSR61042	CSR61047	CSR61142	CSR61147	GMA61242	CSR61247
Width (mm)	600	600	600	600	600	600
Depth (mm)	1000	1000	1100	1100	1200	1200
Height (mm)	2000	2200	2000	2200	2000	2200
Rack Unit	42U	47U	42U	47U	42U	47U

CONVENIENT AND RELIABLE (NETWORK) RACK

Exterior	CSR61042	CSR61047	CSR61142	CSR61147	GMA61242	CSR61247
Width (mm)	800	800	800	800	800	800
Depth (mm)	1000	1000	1100	1100	1200	1200
Height (mm)	2000	2200	2000	2200	2000	2200
Rack Unit	42U	47U	42U	47U	42U	47U

SPECIFICATION

Standard Part List:

19" G-shape Frame (1-set), Side Door (4 pcs), Adjustable Leveling Foot (4 pcs), M6 Steel Bolt (40 pcs), Front Door (1 pcs), Back Door (1 pcs), Verticle Cable Tray (1 pcs), Manuals, Certificates, Standard Packaging and Rack's Label.


Material : SPCC Cold Rolled Steel
Colour : RAL9005 (Black)
Front/Back Door :1.2mm
Side Door :1.2 mm

Standard : Compliance with industry Standard EIA-310-D (19") Frame : G-Shape Profile

Vertical Mounting Rails (with U position) : 2.0 mm

Height of 1U : 44.45mm
Rack's Net Weight : 140KG

AVAILABLE RACK COLOURS



AIR CIRCULATION MANAGEMENT AND CABLE MANAGEMENT FOR 600 AND 800 RACK

Product	Model #	Description	Drawing
1U Steel Blanking Plate	GW1901B	 19-inch 1U Standard Quick-Snap Installation 1.0~1.2 mm SPCC Material Colour may be configured 	
2U Steel Blanking Plate	GW1902B	 19-inch 2U Standard Quick-Snap Installation 1.0~1.2 mm SPCC Material Colour may be configured 	
1U Plastic Blanking Plate	GW1901FP	19-inch 1U StandardQuick-Snap InstallationFire-Retardant ABS Material	
1U Steel Tray for Cable Management	GW1101UB	19-inch 1U StandardSteel Cable OrganizerSuitable for Network Cabling	Limmuna
1U Plastic Tray for Cable Management	GW1101UC	19-inch 1U StandardNew Design of Plastic TraySuitable for Network Cabling	
2U Plastic Tray for Cable Management	GW1102UC	19-inch 2U StandardNew Design of Plastic TraySuitable for Network Cabling	
2U Vertical Tray for Cable Management	GW1020/22UB	 2U Width New Design of Plastic Tray Designated for vertical cable management and suitable for Network Cabling 	
Cantilever Tray/ Equipment Tray/ Bracket	GA1121/LS/TS/KS/ FT/KT/RT/TC	Suitable for all server racks and network racks.	
Rack Top Prefabricated Cable Tray	GES18M30/60/ 80	 Suitable for all server racks and network racks. 	The state of

TI CIRC/CIDC/CSR

NOTES	NOTES



CHINA OFFICE Guangzhou CITEC Engineering Co. Ltd.

No. 30. Tianhe North Road. Tianhe District, Guangzhou, China.

T: +8620 3886 5819 / 5971 F: +8620 3886 9400

E: daichunhua@citecinternational-china.com

SINGAPORE OFFICE CITEC International (SEA) Pte. Ltd.

Hudson Techno Centre Singapore 536204.

T: +65 - 6281 7748 F: +65 - 6281 4412

E: william@citecinternational.com.sg

HONG KONG OFFICE

CITEC International Ltd.

60 Hung To Road, Kwun Tong, Kowloon, Hong Kong

T: +852 - 2827 0688

E: enquiry@citecinternational.com

THAILAND OFFICE CITEC International Group (Thailand) Co., Ltd.

89, Cosmo Office Park Building, 7th Floor, Popular 3 Road, Ban Mai, Pak Kret, Nonthaburi 11120, Thailand.

T: +66 - 2019 0548 F: +66 - 2019 0548



www.citecinternational.com