Compte Rendu

Redirection de port à effectuer sur le Pfsense

Numéro	Port WAN	Destination DMZ	Port destination	Service
1	443,80	SRV-WEB	443, 80	HTTP/HTTPS
2	221	SRV-WEB	22	SSH
3	25	SRV-MAIL	25	SMTP
4	222	SRV-MAIL	22	SSH
6	223	SRV-GLPI	22	SSH
7	8080	SRV-GLPI	80, 433	HTTP/HTTPS

- Sur le Pfsense, aller sur l'onglet « Firewall » puis « NAT »
- Sur le l'onglet « Port Forward », ajouter une nouvelle règle avec le bouton « Add » (celui avec la flèche vers le bas) pour chaque redirection de port à effectuer, voici les étapes pour chacune :

Redirection 1 :

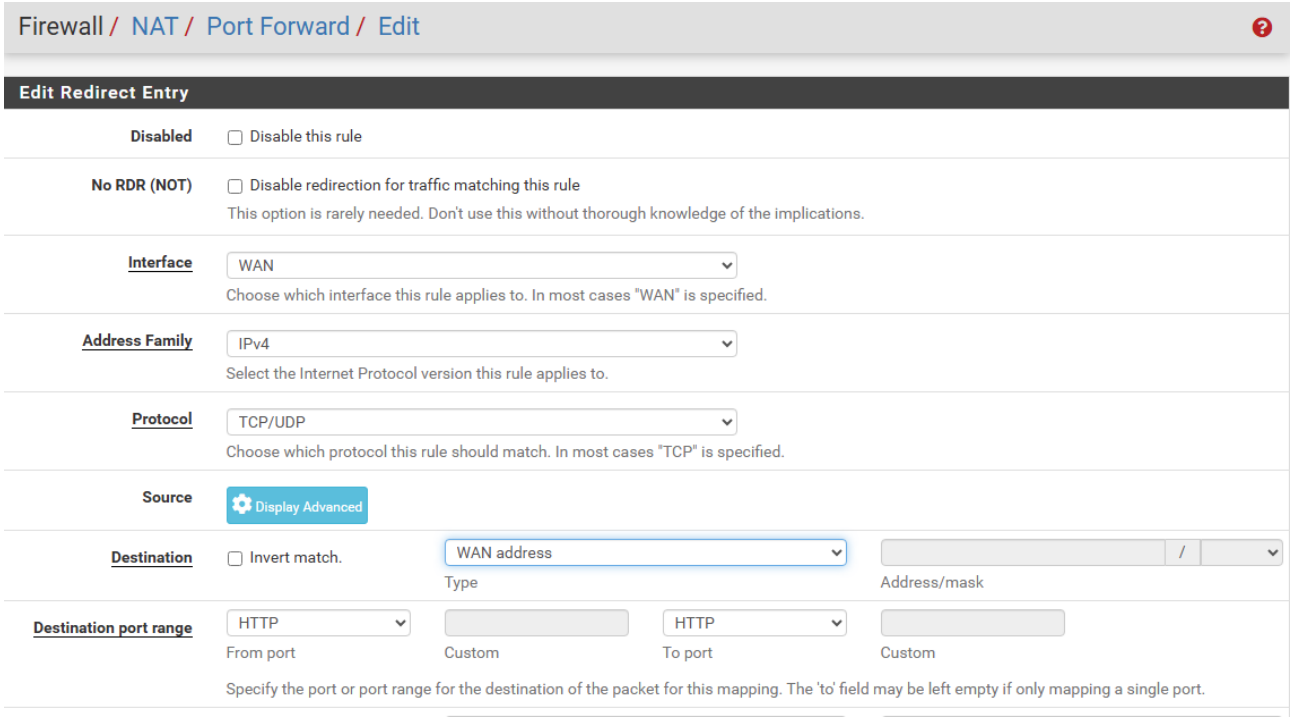

Redirect target IP

Type: Address or Alias

Address: 10.54.0.80

Enter the internal IP address of the server on which to map the ports. e.g.: 192.168.1.12 for IPv4
In case of IPv6 addresses, in must be from the same "scope",
i.e. it is not possible to redirect from link-local addresses scope (fe80:*) to local scope (::1)

Redirect target port

Port: HTTP

Custom:

Specify the port on the machine with the IP address entered above. In case of a port range, specify the beginning port of the range (the end port will be calculated automatically).
This is usually identical to the "From port" above.

Description

Redirection port 80

A description may be entered here for administrative reference (not parsed).

No XMLRPC Sync

☐ Do not automatically sync to other CARP members

This prevents the rule on Master from automatically syncing to other CARP members. This does NOT prevent the rule from being overwritten on Slave.

NAT reflection

Use system default

Filter rule association

Pass

Rule Information

Created 10/2/25 06:56:04 by admin@172.17.0.1 (Local Database)

Updated 10/2/25 06:56:04 by admin@172.17.0.1 (Local Database)

Save

Redirection 2 :

Firewall / NAT / Port Forward / Edit

Edit Redirect Entry

Disabled ☐ Disable this rule

No RDR (NOT) ☐ Disable redirection for traffic matching this rule

This option is rarely needed. Don't use this without thorough knowledge of the implications.

Interface WAN

Choose which interface this rule applies to. In most cases "WAN" is specified.

Address Family IPv4

Select the Internet Protocol version this rule applies to.

Protocol TCP/UDP

Choose which protocol this rule should match. In most cases "TCP" is specified.

Source Display Advanced

Destination ☐ Invert match.

Type: WAN address

Address/mask: /

Destination port range

From port: Other

Custom: 221

To port: Other

Custom: 221

Specify the port or port range for the destination of the packet for this mapping. The 'to' field may be left empty if only mapping a single port.

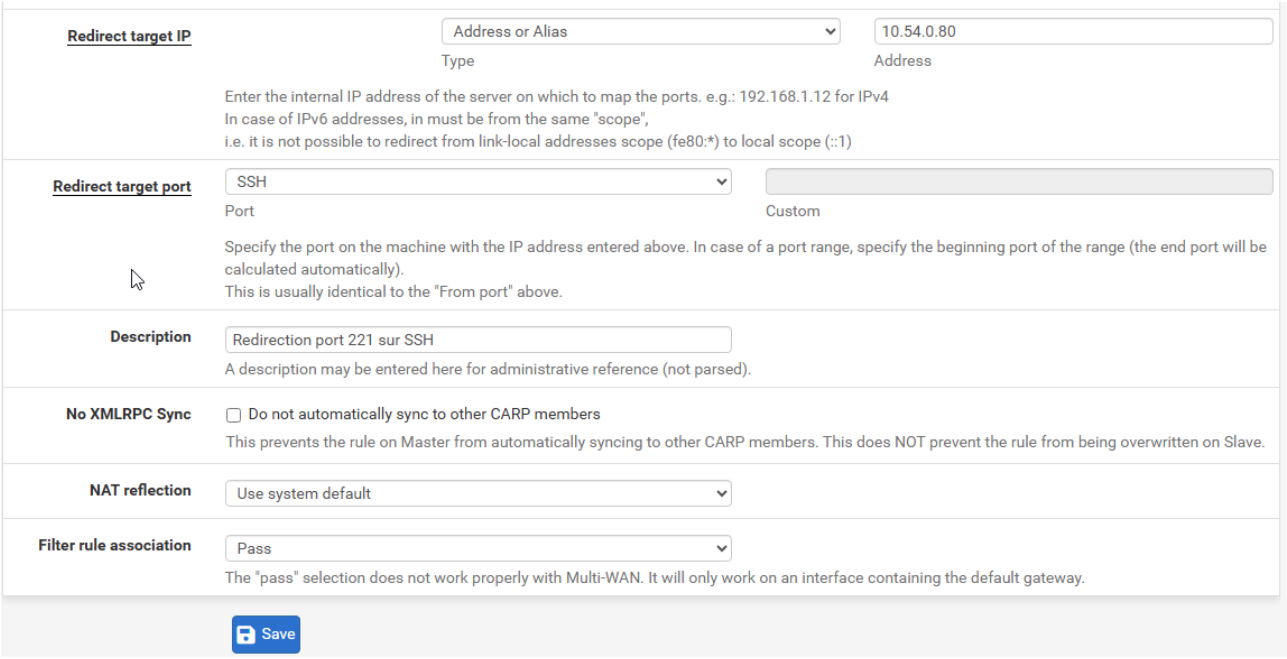

Pour se connecter via Putty au serv Web sur le PC hôte :

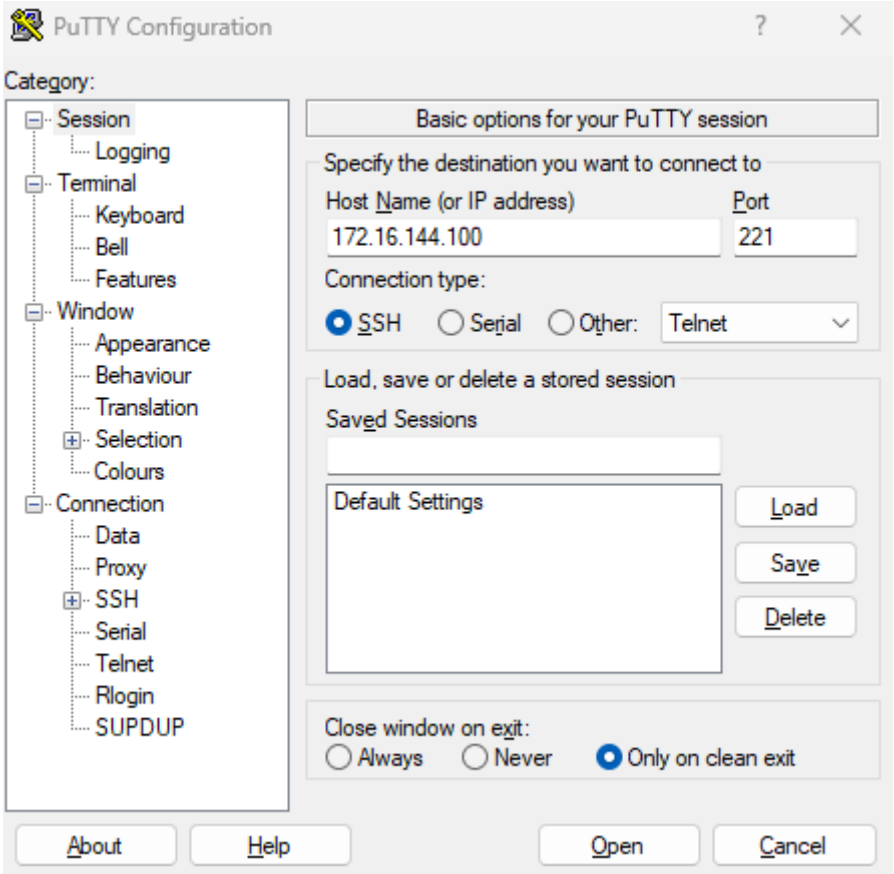

Redirection 3 :

Firewall / NAT / Port Forward / Edit

Edit Redirect Entry

Disabled	☐ Disable this rule
No RDR (NOT)	☐ Disable redirection for traffic matching this rule This option is rarely needed. Don't use this without thorough knowledge of the implications.
Interface	WAN Choose which interface this rule applies to. In most cases "WAN" is specified.
Address Family	IPv4 Select the Internet Protocol version this rule applies to.
Protocol	TCP/UDP Choose which protocol this rule should match. In most cases "TCP" is specified.
Source	Display Advanced
Destination	☐ Invert match. WAN address (Type) / Address/mask
Destination port range	SMTP (From port) Custom — SMTP (To port) Custom Specify the port or port range for the destination of the packet for this mapping. The 'to' field may be left empty if only mapping a single port.
Redirect target IP	Address or Alias (Type) 10.54.0.25 (Address) Enter the internal IP address of the server on which to map the ports. e.g.: 192.168.1.12 for IPv4 In case of IPv6 addresses, in must be from the same "scope", i.e. it is not possible to redirect from link-local addresses scope (fe80:*) to local scope (::1)
Redirect target port	SMTP (Port) Custom Specify the port on the machine with the IP address entered above. In case of a port range, specify the beginning port of the range (the end port will be calculated automatically). This is usually identical to the "From port" above.
Description	Redirection du port 25 A description may be entered here for administrative reference (not parsed).
No XMLRPC Sync	☐ Do not automatically sync to other CARP members This prevents the rule on Master from automatically syncing to other CARP members. This does NOT prevent the rule from being overwritten on Slave.
NAT reflection	Use system default
Filter rule association	Pass The "pass" selection does not work properly with Multi-WAN. It will only work on an interface containing the default gateway.

Save

Accès à internet depuis la DMZ :

- Depuis l'onglet « Rules » dans « Firewall » sur le pfsense, configurer une règle d'accès à internet pour la DMZ

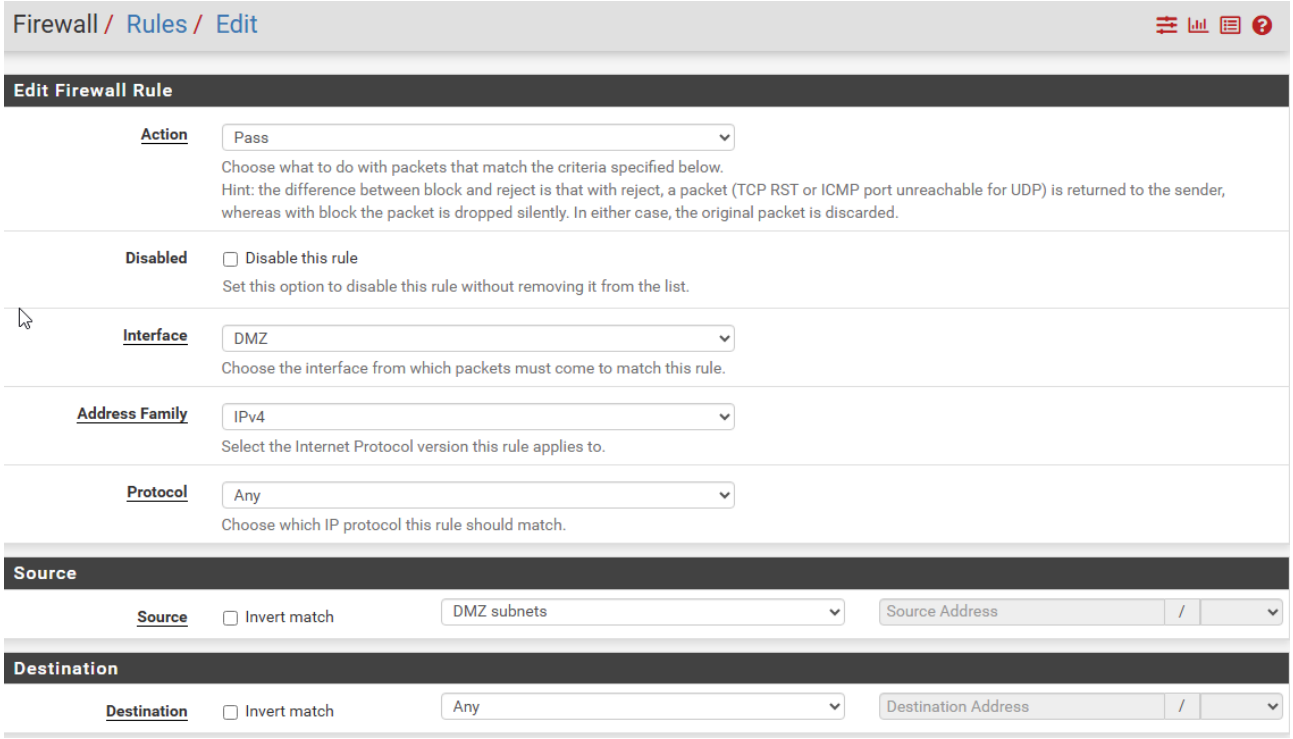

DHCP :

- Étapes à effectuer après l'installation du service DHCP sur le serveur AD :

→ on veut un pool d'adresse de 172.17.0.1 à 172.17.0.255 pour les serveurs ; 172.17.1.1 à 172.17.4.255 pour les ordinateurs et 172.17.5.1 à 172.17.5.40 pour les imprimantes
→ sur la barre de recherche Windows taper « DHCP » puis entrer :

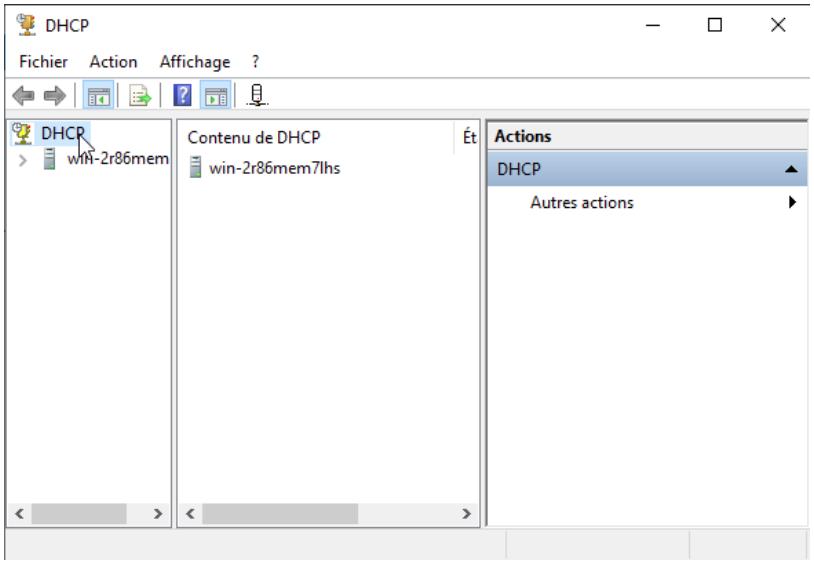

→ On voit que le seul serveur affiché est le nôtre, cliquer dessus puis sur « IPV4 » pour ajouter une nouvelle étendue :

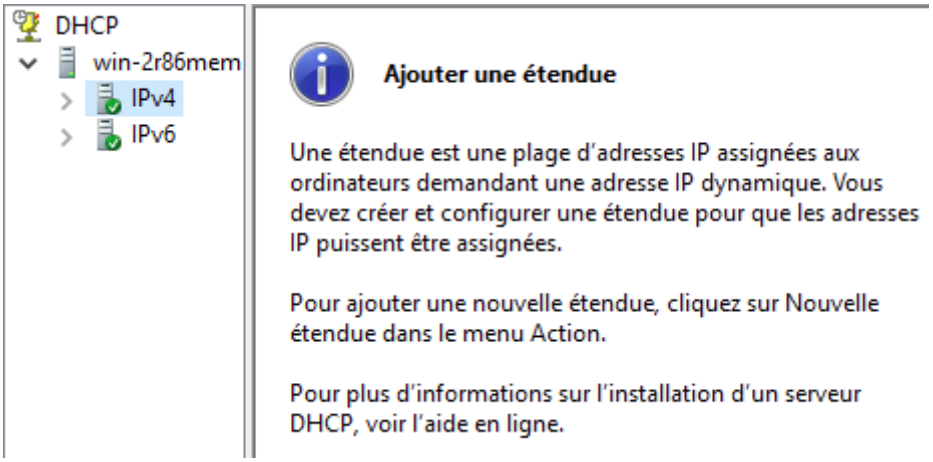

→ Faire clique droit sur « IPV4 » puis « Nouvelle étendue... », une fenêtre devrait s'ouvrir pour configurer la nouvelle étendue.
→ Donner lui un nom e tune description (facultatif)

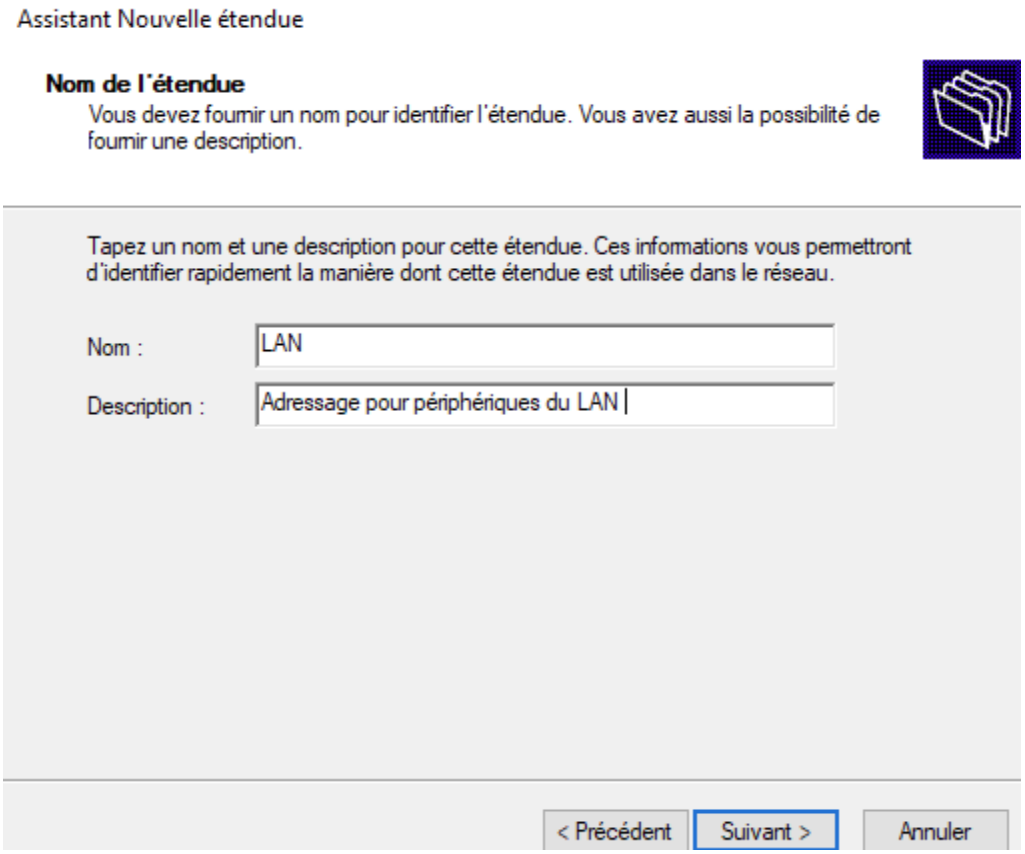

→ Configurez le pool d'adresse :

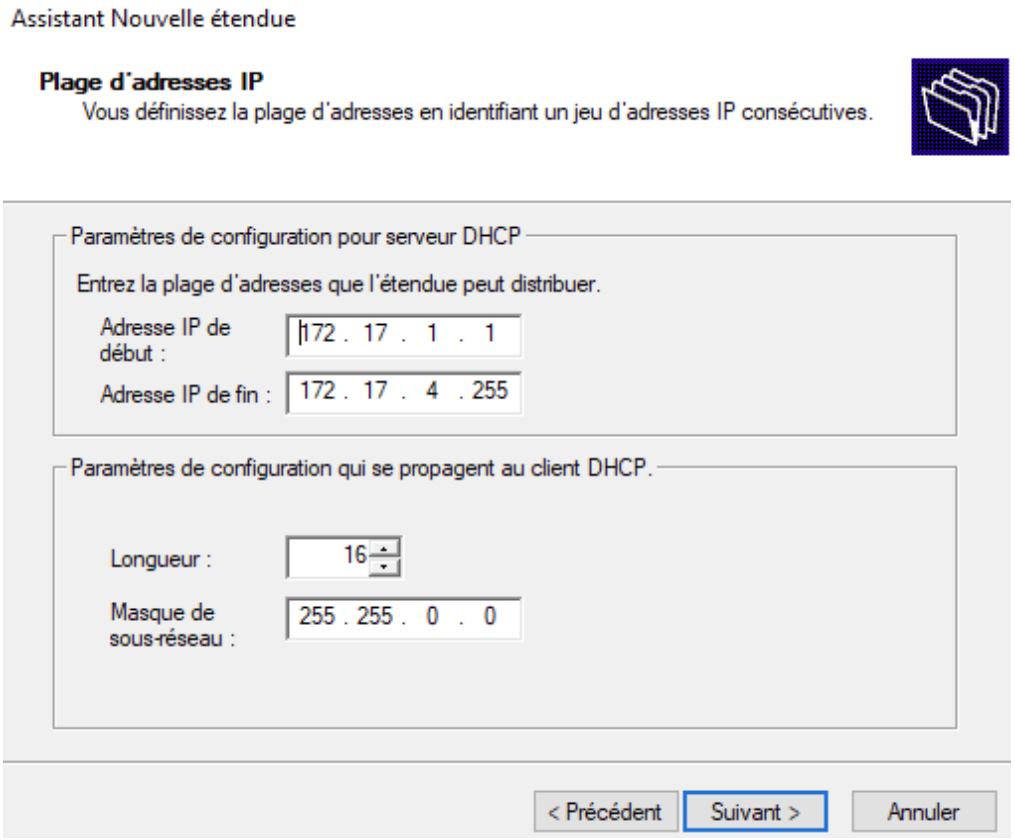

→ Ne mettre aucune exclusion d'adresse
→ Mettre le bail par défaut (8 jours)
→ Configurer les options DHCP maintenant :

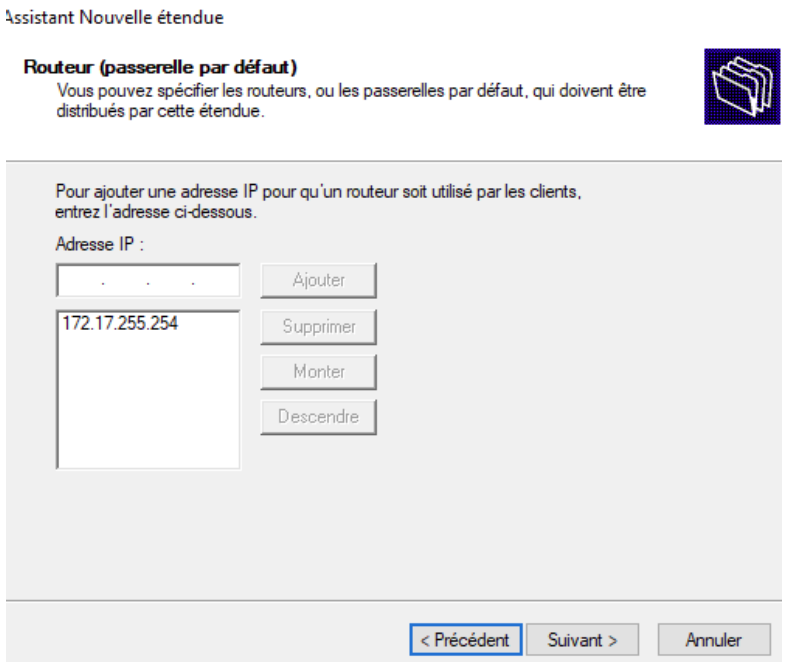

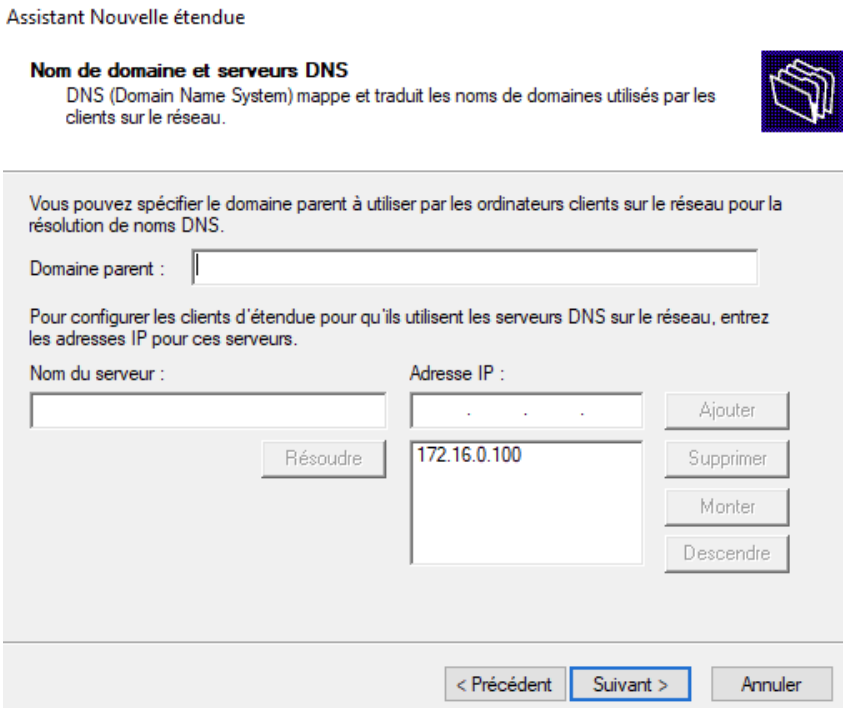

(erreur, mettre l'adresse IP du serveur AD comme DNS)
→ Ne mettre aucun serveur WINS
→ Pour finir, activer l'étendue maintenant
→ Désormais, tout les périphériques configurés en DHCP recevront une configuration IP dans ce pool d'adresses.

AD :

PENSEZ A RENOMMER LE SERVEUR AVANT CETTE ETAPE (« serveurAD » par exemple »)

→ Sur le Gestionnaire de serveur, après avoir installer le service AD DS, cliquer sur le drapeau avec un triangle jaune. Puis cliquez sur « promouvoir ce serveur en contrôleur de domaine ». L'installation du service AD DS ajoute automatiquement le service DNS :

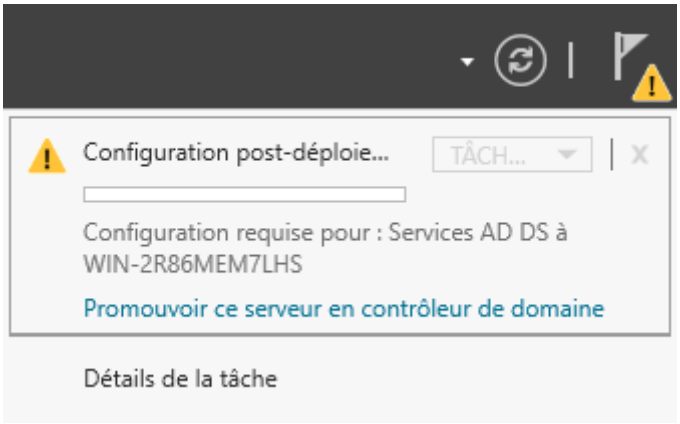

Ensuite il faut ajouter une nouvelle forêt et lui donner un nom de domaine :

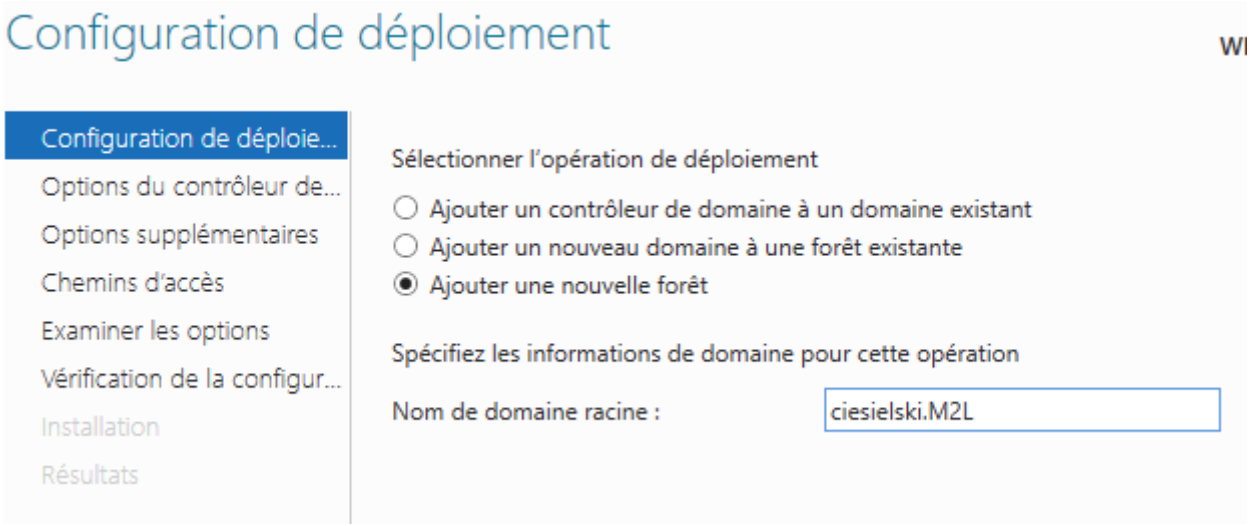

Configurez un mot de passe (pour nous Azerty31) et activer le serveur DNS :

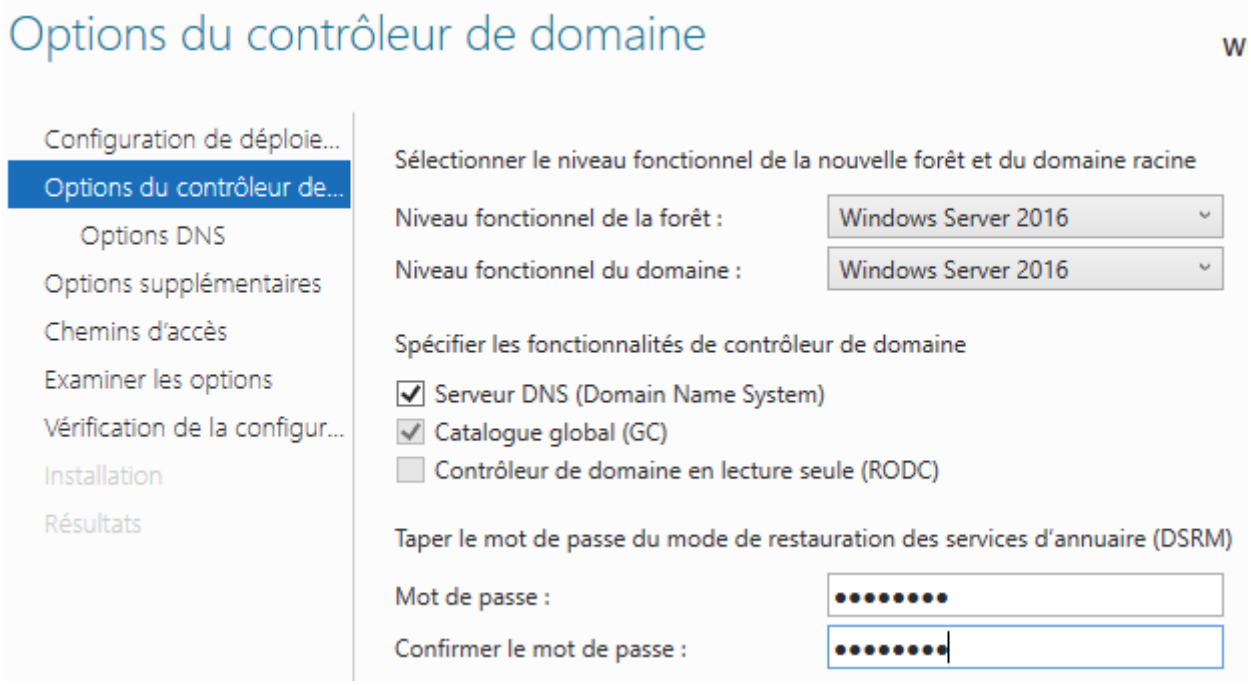

Pour finir terminez l'installation et redémarrer le serveur. Si tout est bien effectué, en tapant « utilisateurs et ordinateurs Active Directory » dans la barre de recherche Windows on devrait avec ça :

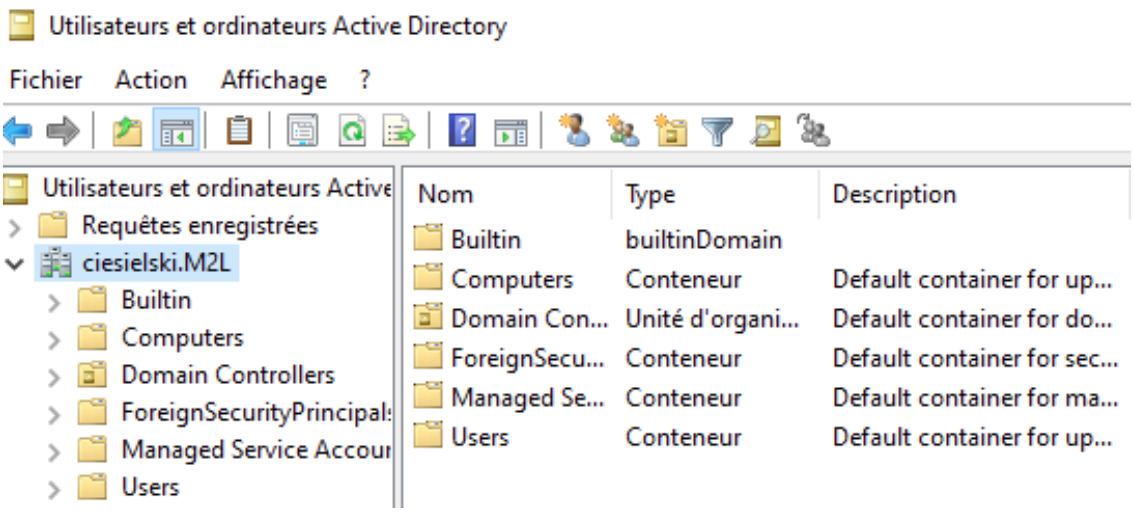

Faites clique droit sur « ciesielski.M2L » puis « Nouveau... » et « Créer une nouvelle unité d'organisation » pour créer l'UO « M2L » :

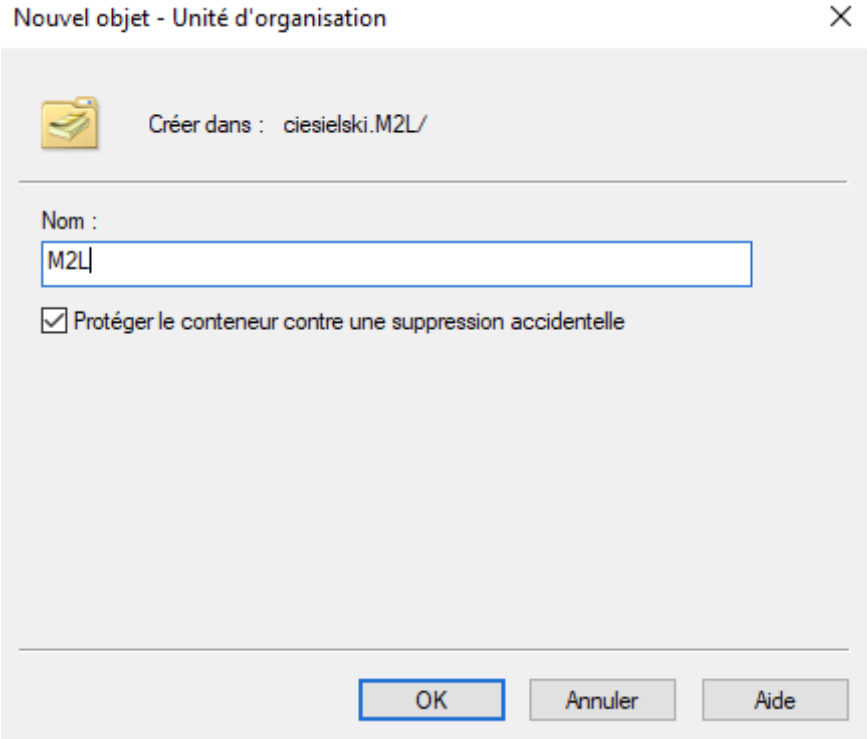

Enfin, créez deux autres UO dans M2L et créer des utilisateurs/groupes selon le l'annexe donné par les professeurs.

DNS :

(voir doc réseau rendu GSB pour le début)

Faire « nouvel hôte » sur cisielski.M2L :

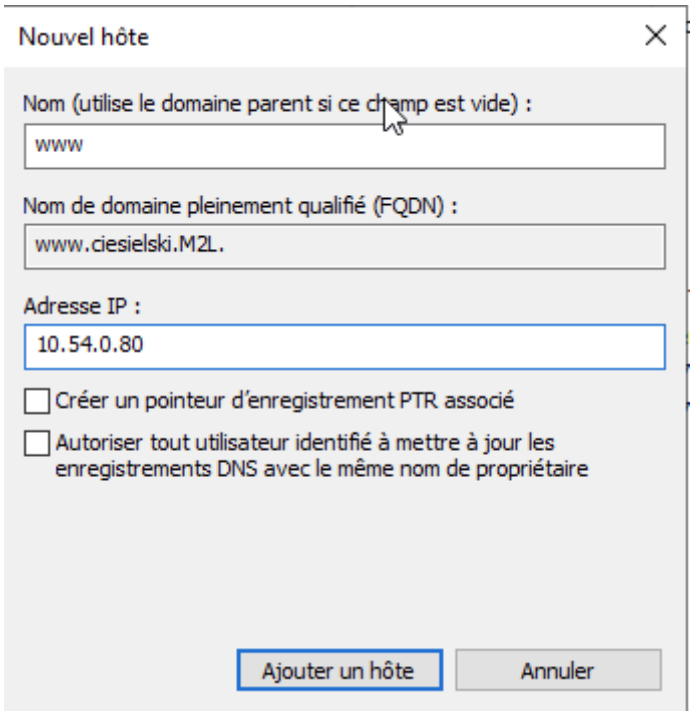

Fait sur le serv WEB (FINI) :
- conf réseau
- upgrade/update
- installation Apache
- installation PHP
- installation MariaDB
- installation PhpMyAdmin + config d'un admin (login+mdp = admin+Azerty31)
- installation SSH

Fait sur lePfsense :
- Config des trois interfaces (WAN, LAN et DMZ)
- Redirection de ports

Fait sur l'AD :
- DHCP
- AD
- DNS dans LAN

Fait :
-DNS WAN