

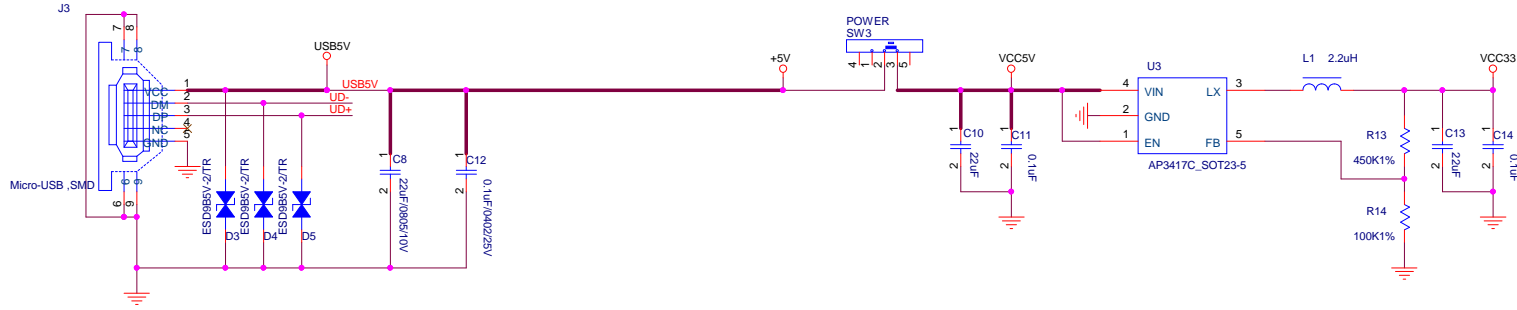



5V DC ADAPTER

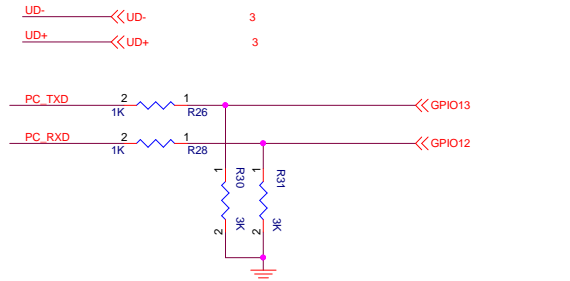


5V USB to Uart

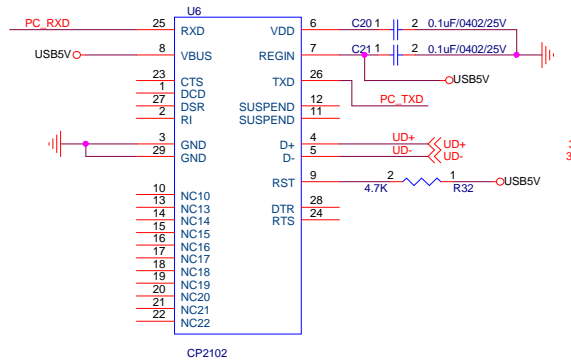


5V USB A TYPE OUT

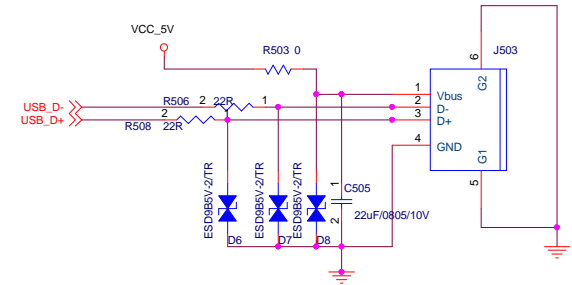


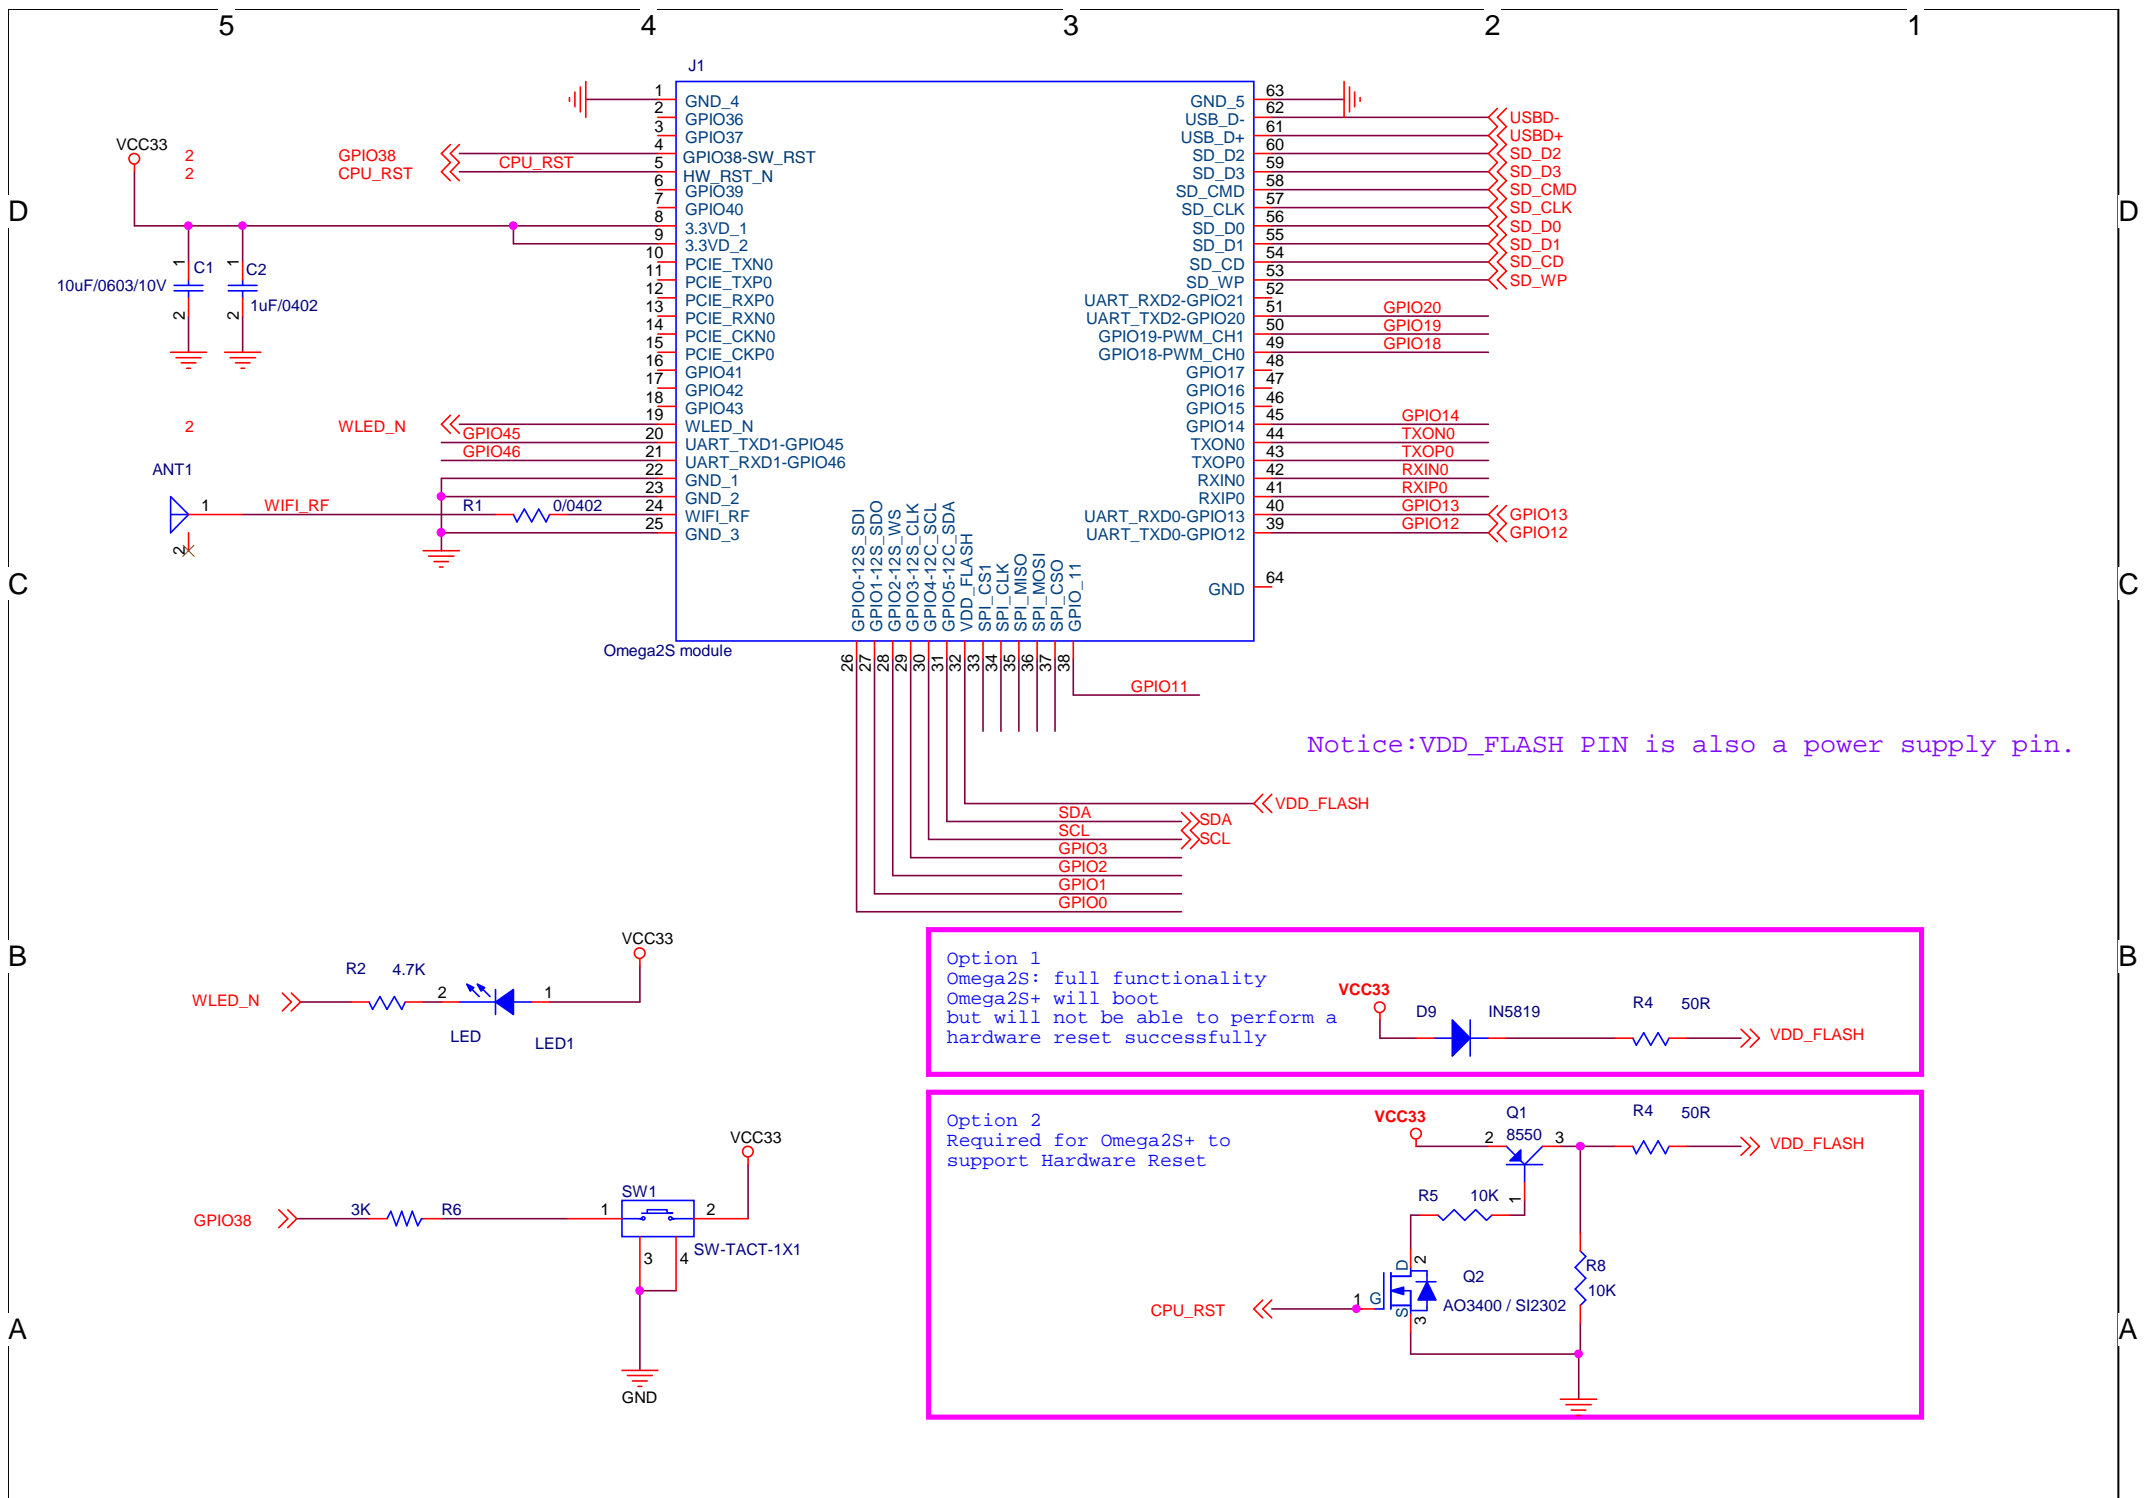


The Omega2S can only support one SDIO Device.
If you are connecting to an EMMC memory device, then do not connect to a Micro-SD Card.

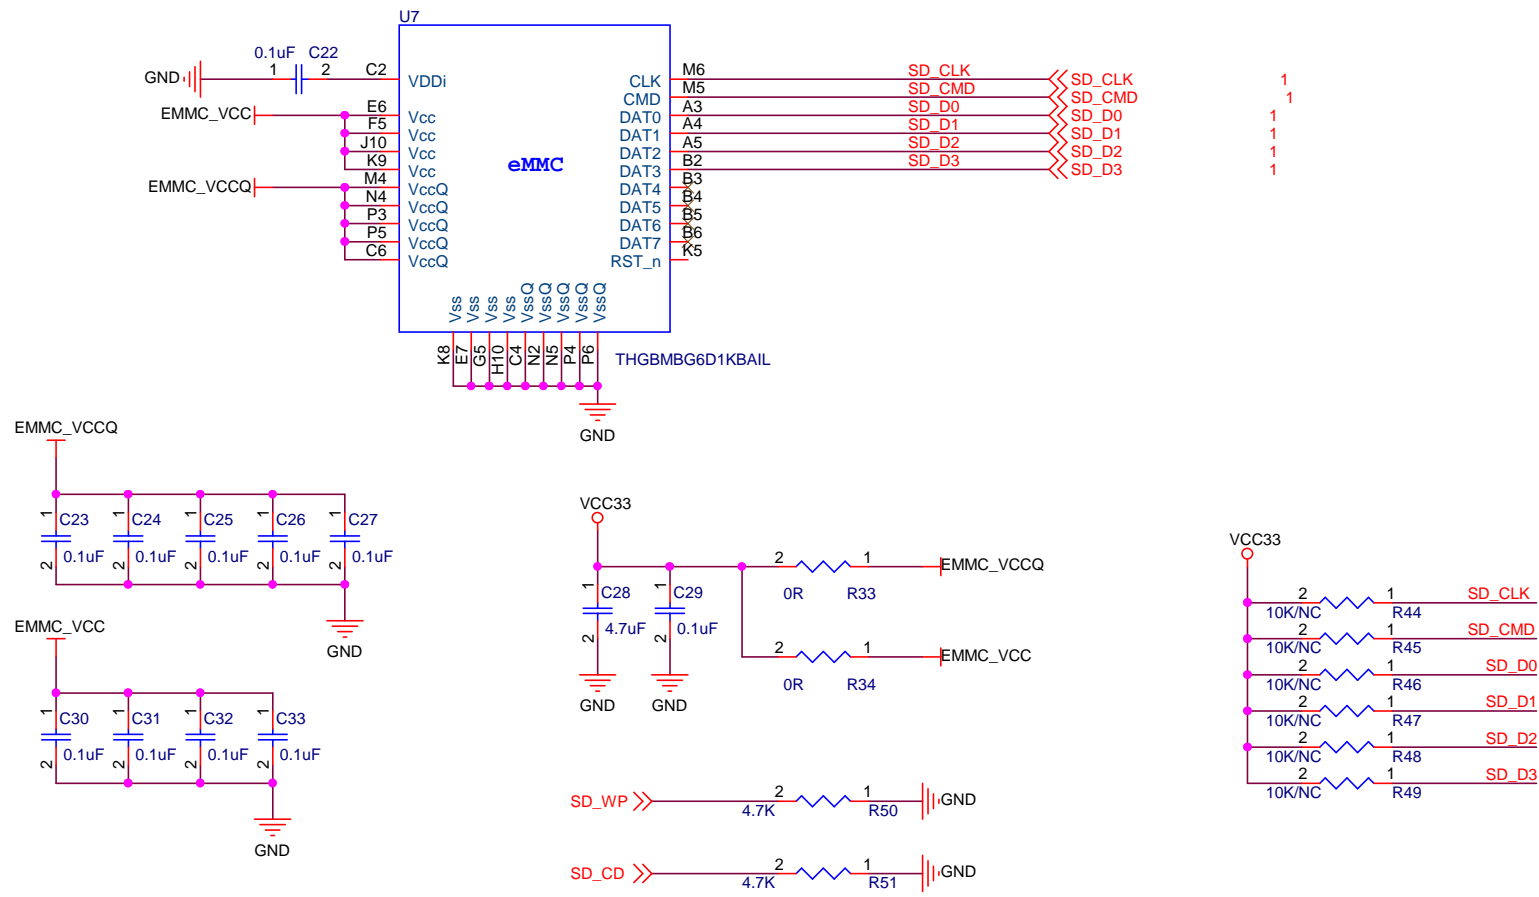



The Omega2S can only support one SDIO Device.
If you are connecting to a Micro-SD card, then do not connect to EMMC memory.

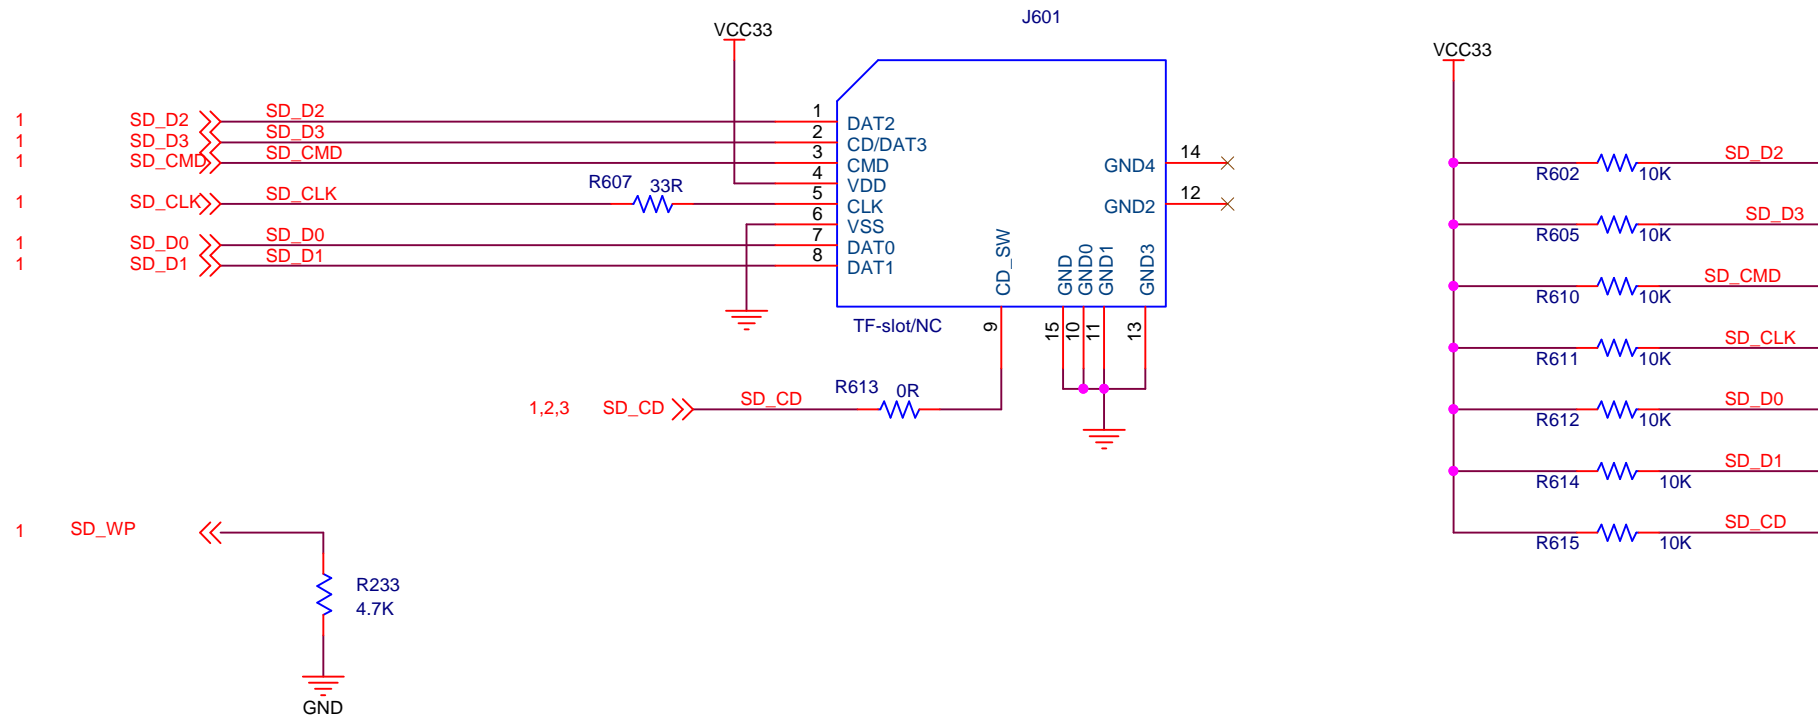

Option1

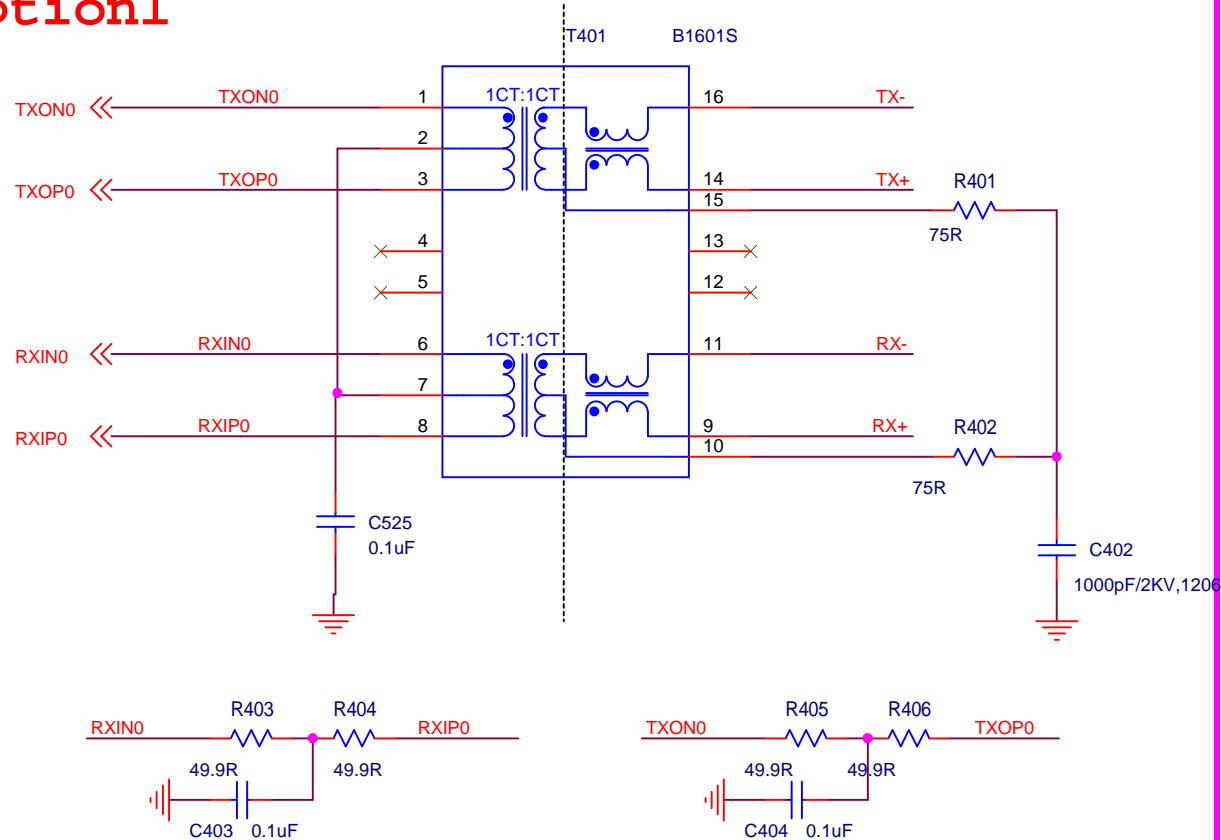

10/100 WAN port

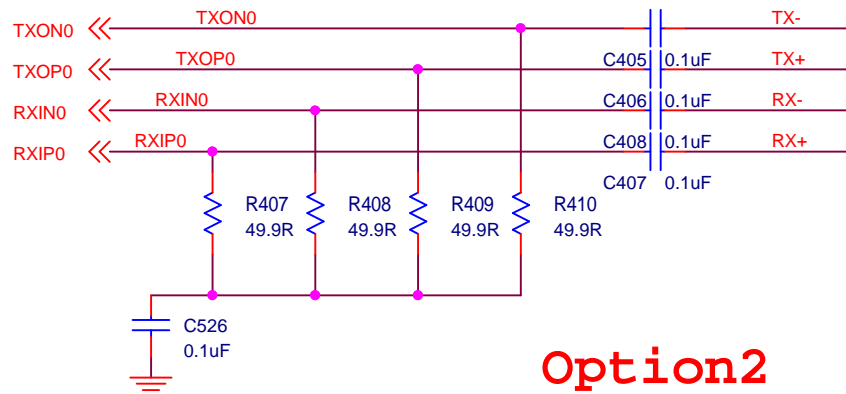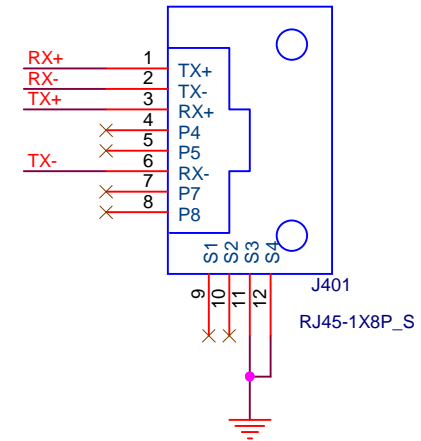

Option2

There are two Ethernet circuit options:

Option1: The recommended option, good for all data transmissions over Ethernet

Option2: A simpler and more cost-effective solution for data transmissions over Ethernet for short distances (less than 5 meters)