

Technical Data Sheet

Junction Box

Product Code: 4.06

4.06

Features & Advantages

- Stainless Steel (SS-304) screws
- All side walls have multiple knockouts to accommodate different cable sizes for ease of installation on site
- Wall mounting screw knockouts from inside of base
- Moulded M5 Stainless Steel nuts for easy outside mounting without tampering enclosure IP Rating.
- Multiple bushes provided for mounting of din channel / mounting Plate.
- Weather Proof for Outdoor Applications.
- Available in Opaque PC/ABS materials
- Option of Polycarbonate Transparent Top Cover with PC/ABS base




Optional Accessories

- Hinge
- Latch with lock
- External Wall Mounting
- Antivibration Terminal (25A)
- 4 Way Stud Type Terminal Block (32A/63A)
- Din Channel mounted Screw / Screwless terminals (2.5 to 25 Sq. mm)
- Cable Glands

Technical Data

Description	ABS	Polycarbonate
Dimension	210x160x100 mm	210x160x100 mm
Material	ABS	PC/Glass Reinforced Polycarbonate (GRP)
Ingress Protection	IP 67, IEC-60529	IP 67, IEC-60529
Ultraviolet Protection	UV Stabilized	UV Stabilized, EN ISO 4892
Impact Resistance	IK07	IK08/09/10, IEC 60068-2-72
Glow Wire Test	650° C	820/960 °C, IS 11000-2-1, IEC 60695-2-10
Ambient Temperature	-20 to +60° C	-25 to +80 Deg. C
Fire Rating	HB / V2 Optional	UL94V-0
ROHS	Compliant	Compliant IEC 62321
Environment Protection	Halogen Free	Halogen Free

Drawings

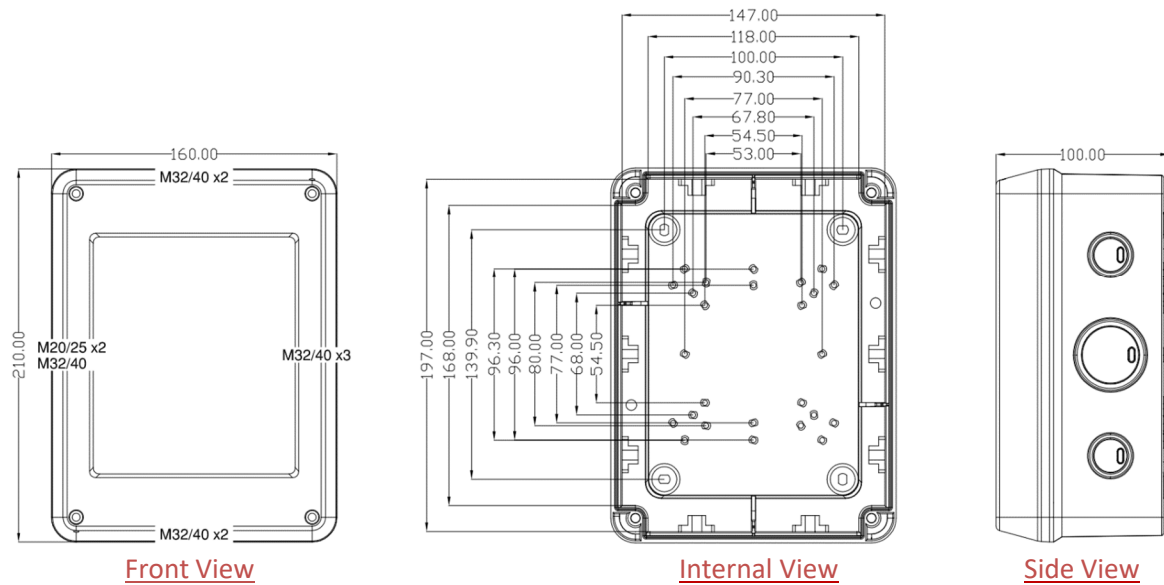

Application Picture

