

Technical Data Sheet

Inbuilt Hinged Enclosure

Code: 1.02

1.02

Features & Advantages

- Stainless Steel Screws (SS304)
- Inbuilt Hinges that keep the lid and base together after opening
- Provision for Padlock.
- Can be mounted on walls and poles with ease.
- Outside bushes provided to mount box without tampering enclosures and IP Rating
- Multiple bushes provided for mounting of din channel, terminals & component mounting plate.
- Plain walled enclosure.
- Gland holes/Customizations can be carried out as per specific drawing.
- Weather Proof for Outdoor Applications.
- Available in Opaque PC/ABS materials
- Option of Polycarbonate Transparent Top Cover with PC/ABS base




Optional Accessories

- External Wall Mounting (Polymer)
- Pole Mounting Accessory with Clamp as per Pole Diameter.
- Mounting Plate (Polymer / CRCA Powder Coated / Bakelite)
- Antivibration Terminal Block (25 Sq. mm / 35 Sq. mm).
- 4 Way Stud Type Terminal Block (32A / 63A)
- Screw Type / Screwless Terminals (2.5 Sq. mm to 25 Sq. mm.)
- Ventilators (Round/Rectangle)
- Polycarbonate Windows
- Carry Handle (Straight/Flush)
- Cable Glands

Technical Data

Description	ABS	Polycarbonate
Dimension	275x225x105 mm	275x225x105 mm
Material	ABS	PC/Glass Reinforced Polycarbonate (GRP)
Ingress Protection	IP 67, IEC-60529	IP 67, IEC-60529
Ultraviolet Protection	UV Stabilized	UV Stabilized, EN ISO 4892
Impact Resistance	IK07	IK08/09/10, IEC 60068-2-72
Glow Wire Test	650° C	820/960 °C, IS 11000-2-1, IEC 60695-2-10
Ambient Temperature	-20 to +60° C	-25 to +80 Deg. C
Fire Rating	HB / V2 Optional	UL94V-0
ROHS	Compliant	Compliant IEC 62321
Environment Protection	Halogen Free	Halogen Free

Drawings

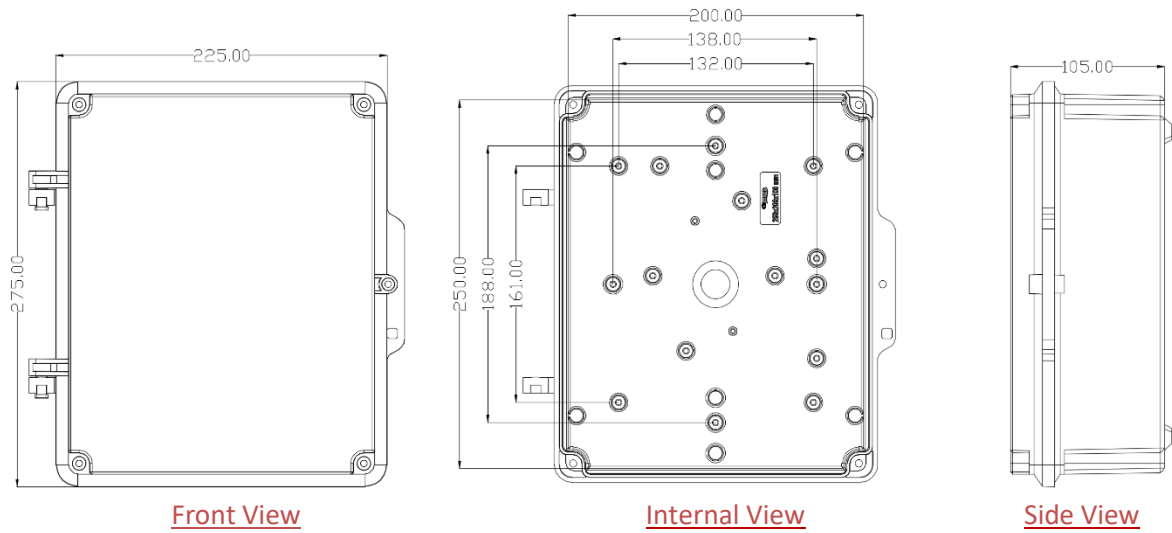

Application Pictures

