

## Technical Data Sheet

### Plain Wall Industrial Enclosure

Product Code: 2.05A

# 2.05A

### Features & Advantages

- Plain walled enclosure.
- Polymer Screws.
- Parallel inner ribs and bush for mounting din channel, terminals and mounting plate.
- Moulded M8 Stainless Steel nuts for easy outside mounting without tampering enclosure IP Rating.
- Gland holes/Customizations can be machined as per drawings.
- Weather Proof for Outdoor Applications
- Available in Opaque PC/ABS materials
- Option of Polycarbonate Transparent Top Cover with PC/ABS base




### Optional Accessories

- Hinges
- External Wall Mounting Clamp (SS304 / CRCA Powder Coated)
- Mounting Plate (Polymer / CRCA Powder Coated / Bakelite)
- Antivibration Terminal Block (25 Sq. mm / 35 Sq. mm)
- 4 Way Stud Type Terminal Block (32A / 63A)
- Terminals Screw Type / Screwless/Busbar (2.5 Sq. mm to 70 Sq. mm)
- Ventilators (Round/Rectangle)
- Latches
- Polycarbonate Windows
- Pole Mounting Accessory with Stainless Steel Screw type Clamp as per Pole Diameter
- Lock with Key
- Carry Handle (Straight/Flush)
- Cable Glands


### Technical Data

| Description                   | ABS              | Polycarbonate                            |
|-------------------------------|------------------|------------------------------------------|
| <b>Dimension</b>              | 640x420x140 mm   | 640x420x140 mm                           |
| <b>Material</b>               | ABS              | PC/Glass Reinforced Polycarbonate (GRP)  |
| <b>Ingress Protection</b>     | IP 67, IEC-60529 | IP 67, IEC-60529                         |
| <b>Ultraviolet Protection</b> | UV Stabilized    | UV Stabilized, EN ISO 4892               |
| <b>Impact Resistance</b>      | IK07             | IK08/09/10, IEC 60068-2-72               |
| <b>Glow Wire Test</b>         | 650° C           | 820/960 °C, IS 11000-2-1, IEC 60695-2-10 |
| <b>Ambient Temperature</b>    | -20 to +60° C    | -25 to +80 Deg. C                        |
| <b>Fire Rating</b>            | HB / V2 Optional | UL94V-0                                  |
| <b>ROHS</b>                   | Compliant        | Compliant IEC 62321                      |
| <b>Environment Protection</b> | Halogen Free     | Halogen Free                             |


## Drawings

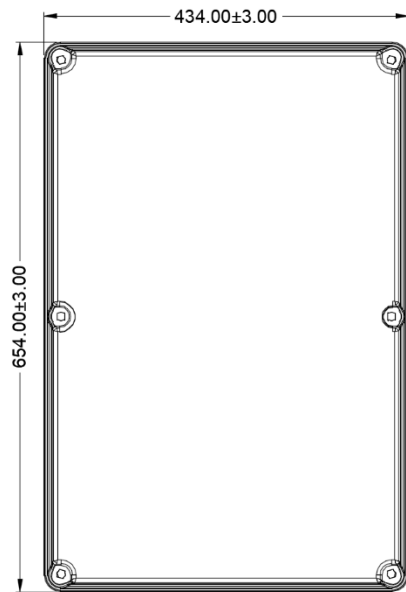

Front View

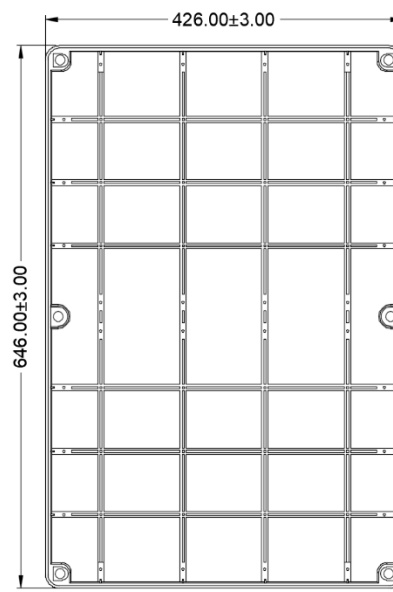

Internal View

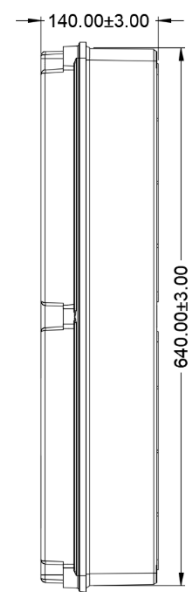

Side View

## Application Picture

