

Technical Data Sheet

Modular Panel Enclosure

Product Code: 3.03

3.03

Features & Advantages

- Polymer screws
- Large wall knockouts in base for passing of bus bars and cables.
- Modular can be Joined in modules to make any size of electrical solution / LV panel.
- Moulded Silicon jointing kits for protection against ingress of water and dust.
- Moulded M8 Stainless Steel nuts for easy outside mounting without tampering enclosure IP Rating.
- Pole Mounting with accessories.
- Multiple bushes provided for mounting of din channel, terminals and mounting plate`.
- Gland holes/Customizations can be machined as per drawings.
- Weather Proof for Outdoor Applications
- Available in Opaque PC/ABS materials
- Option of Polycarbonate Transparent Top Cover with PC/ABS base




Optional Accessories

- External Wall Mounting Clamp (SS304 / CRCA Powder Coated)
- Gland Plate
- Mounting Plate (Polymer / CRCA Powder Coated / Bakelite)
- Antivibration Terminal Block (25 Sq. mm / 35 Sq. mm)
- 4 Way Stud Type Terminal Block (32A / 63A)
- Terminals Screw Type / Screwless/Busbar (2.5 Sq. mm to 35 Sq. mm)
- Ventilators (Round/Rectangle)
- Polycarbonate Windows
- Lock with Key
- Pole Mounting Accessory with Clamp as per Pole Diameter
- Carry Handle (Straight/Flush)
- Cable Glands


Technical Data

Description	ABS	Polycarbonate
Dimension	450x300x210 mm	450x300x210 mm
Material	ABS	PC/Glass Reinforced Polycarbonate (GRP)
Ingress Protection	IP 67, IEC-60529	IP 67, IEC-60529
Ultraviolet Protection	UV Stabilized	UV Stabilized, EN ISO 4892
Impact Resistance	IK07	IK08/09/10, IEC 60068-2-72
Glow Wire Test	650° C	820/960 °C, IS 11000-2-1, IEC 60695-2-10
Ambient Temperature	-20 to +60° C	-25 to +80 Deg. C
Fire Rating	HB / V2 Optional	UL94V-0
ROHS	Compliant	Compliant IEC 62321
Environment Protection	Halogen Free	Halogen Free


Drawings

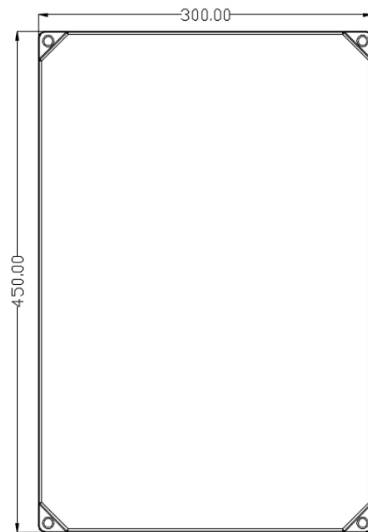

Front View

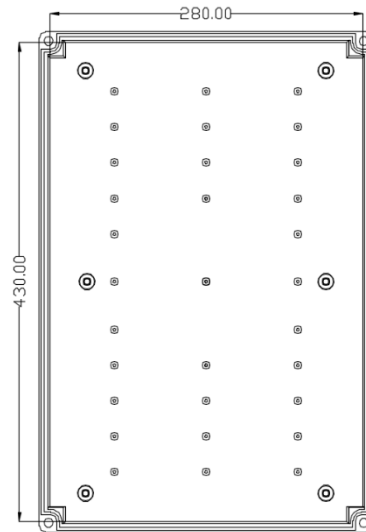

Internal View

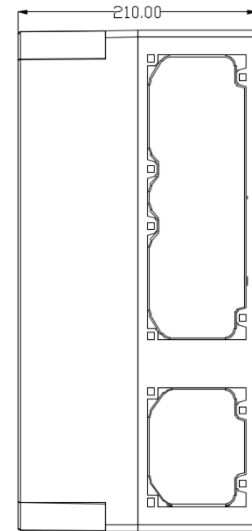

Side View

Application Pictures

