

Technical Data Sheet

Electronic & Automation Enclosure

Product Code: 7.18

7.18

Features & Advantages

- Compact and aesthetic design for PCB and Electronic component mounting
- Metric brass inserts in base for multiple opening & closing of cover
- Stainless Steel (SS304) Screws
- Suitable for Wall Mounting
- Plain walled enclosures.
- Bushes provided for easy installation of din channel / PCB
- Gland holes/Customizations can be machined as per drawings
- Dust and Water Resistant
- Available in Opaque PC/ABS materials
- Option of Polycarbonate Transparent Top Cover with PC/ABS base




Optional Accessories

- Polycarbonate Window
- Mounting Plate (Polymer / CRCA Powder Coated / Bakelite)
- Din Channel mounted Screw / Screwless terminals (2.5/4/6/10 Sq. mm)
- 4 Way Stud Type Terminal (32A/63A)
- Ventilators (Round/Rectangle)
- Carry Handle (Straight/Flush)
- Cable Glands
- Pole Mounting Accessory with Stainless Steel Screw type Clamp as per Pole Diameter

Technical Data

Description	ABS	Polycarbonate
Dimension	260x176x92 mm	260x176x92 mm
Material	ABS	PC/Glass Reinforced Polycarbonate (GRP)
Ingress Protection	IP 65, IEC-60529	IP 65, IEC-60529
Ultraviolet Protection	UV Stabilized	UV Stabilized, EN ISO 4892
Impact Resistance	IK07	IK08/09/10, IEC 60068-2-72
Glow Wire Test	650° C	820/960 °C, IS 11000-2-1, IEC 60695-2-10
Ambient Temperature	-20 to +60° C	-25 to +80 Deg. C
Fire Rating	HB / V2 Optional	UL94V-0
ROHS	Compliant	Compliant IEC 62321
Environment Protection	Halogen Free	Halogen Free

Drawings

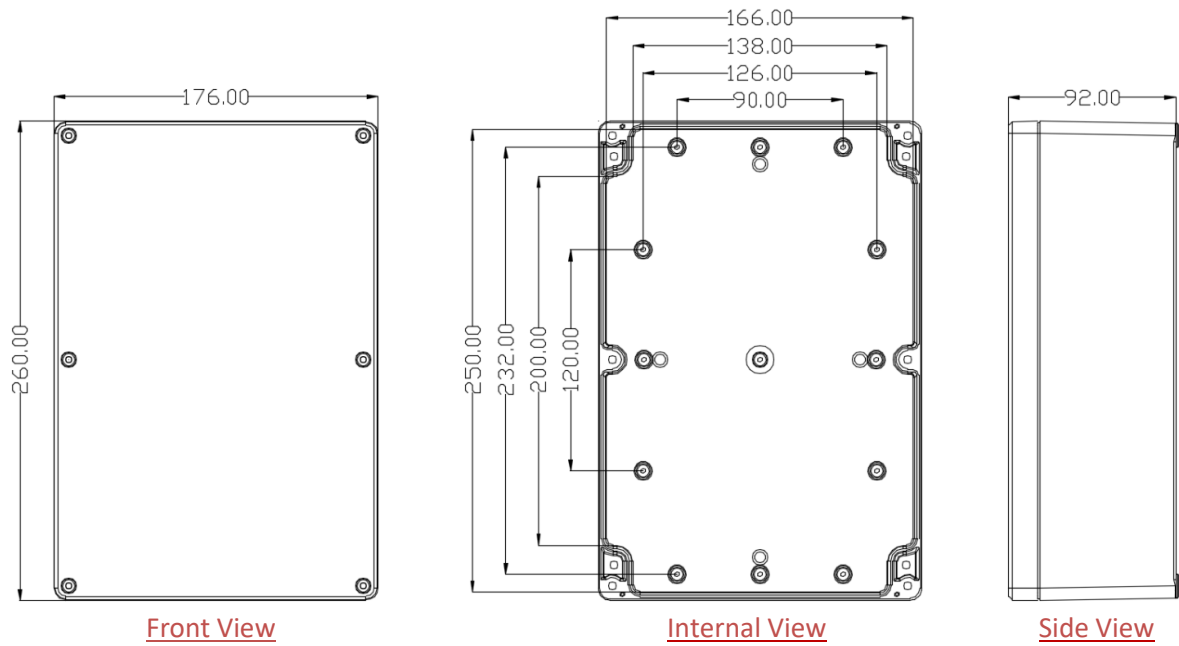

Application Picture

