

## Technical Data Sheet

### Inbuilt Hinged Enclosure

Product Code: 1.05A

# 1.05A

### Features & Advantages

- Plain walled enclosure.
- Inbuilt Hinges that keep base and top cover together after opening.
- Half turn Polymer Latch Screws
- Provision for Padlock
- Inbuilt Latch
- Outside bushes provided to mount box without tampering enclosures and IP Rating
- Pole Mounting with accessories.
- Multiple bushes provided for mounting of din channel, terminals and mounting plate
- Gland holes/Customizations can be machined as per drawings.
- Weather Proof for Outdoor Applications
- Available in Opaque PC/ABS materials
- Option of Polycarbonate Transparent Top Cover with PC/ABS base




### Optional Accessories

- External Wall Mounting (Polymer / SS304 / CRCA Powder Coated)
- Mounting Plate (Polymer / CRCA Powder Coated / Bakelite)
- Antivibration Terminal Block (25 Sq. mm / 35 Sq. mm).
- 4 Way Stud Type Terminal Block (32A / 63A)
- Terminals Type Screw / Screwless (2.5 Sq. mm to 35 Sq. mm.)
- Ventilators (Round/Rectangle)
- Polycarbonate Windows
- Pole Mounting Accessory with Clamp as per Pole Diameter.
- Lock with Key
- Carry Handle (Straight/Flush)
- Cable Glands

### Technical Data

| Description            | ABS              | Polycarbonate                            |
|------------------------|------------------|------------------------------------------|
| Dimension              | 350x300x146 mm   | 350x300x146 mm                           |
| Material               | ABS              | PC/Glass Reinforced Polycarbonate (GRP)  |
| Ingress Protection     | IP 65, IEC-60529 | IP 67, IEC-60529                         |
| Ultraviolet Protection | UV Stabilized    | UV Stabilized, EN ISO 4892               |
| Impact Resistance      | IK07             | IK08/09/10, IEC 60068-2-72               |
| Glow Wire Test         | 650° C           | 820/960 °C, IS 11000-2-1, IEC 60695-2-10 |
| Ambient Temperature    | -20 to +60° C    | -25 to +80 Deg. C                        |
| Fire Rating            | HB / V2 Optional | UL94V-0                                  |
| ROHS                   | Compliant        | Compliant IEC 62321                      |
| Environment Protection | Halogen Free     | Halogen Free                             |

## Drawings

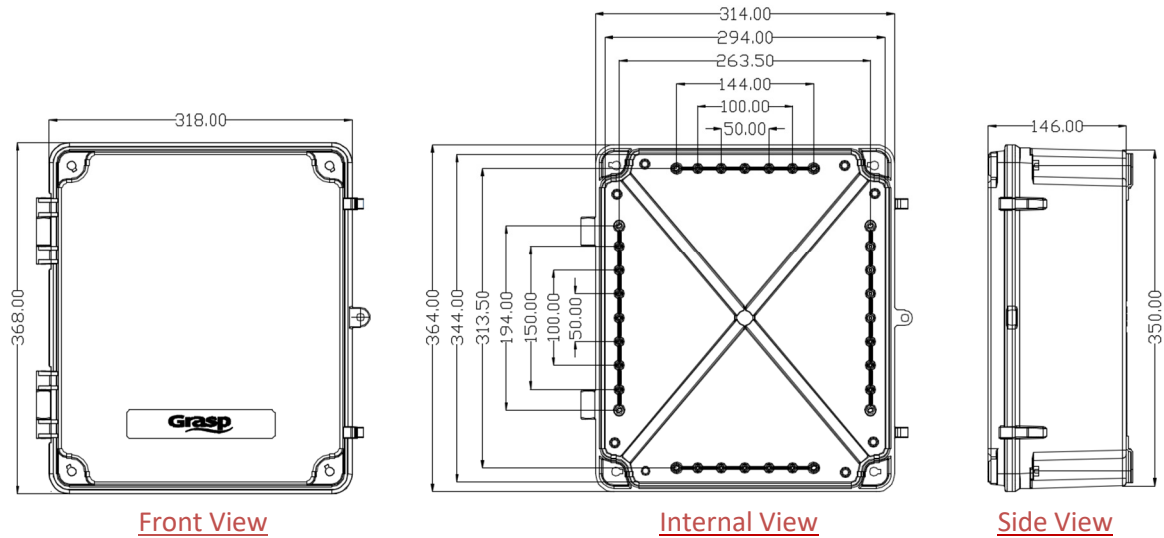

## Application Picture

