
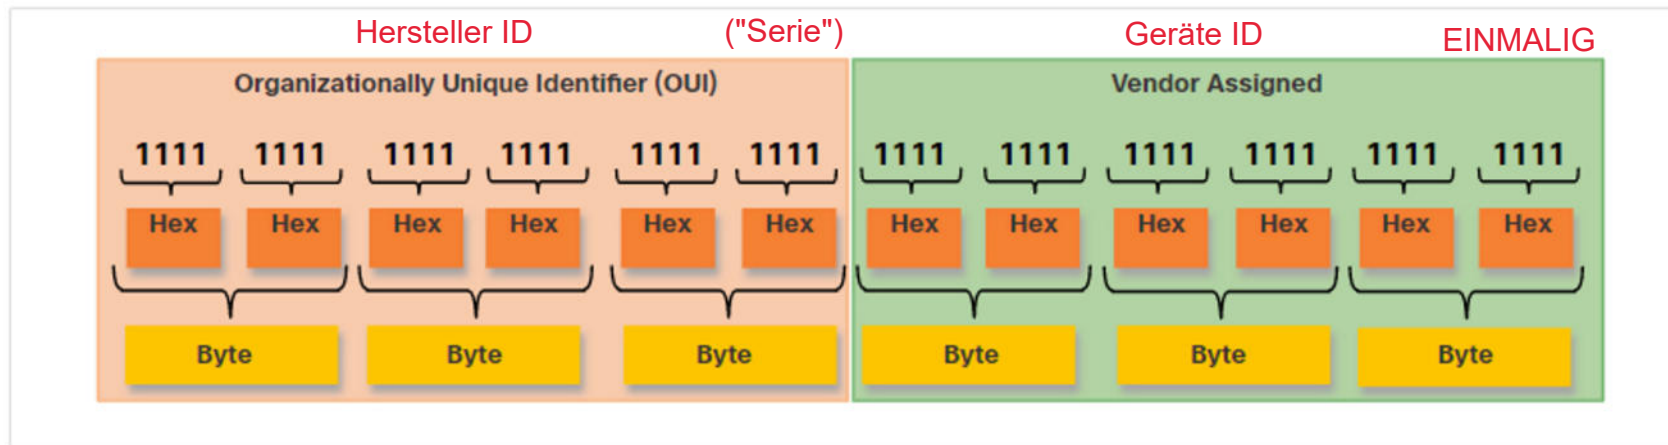


# MAC

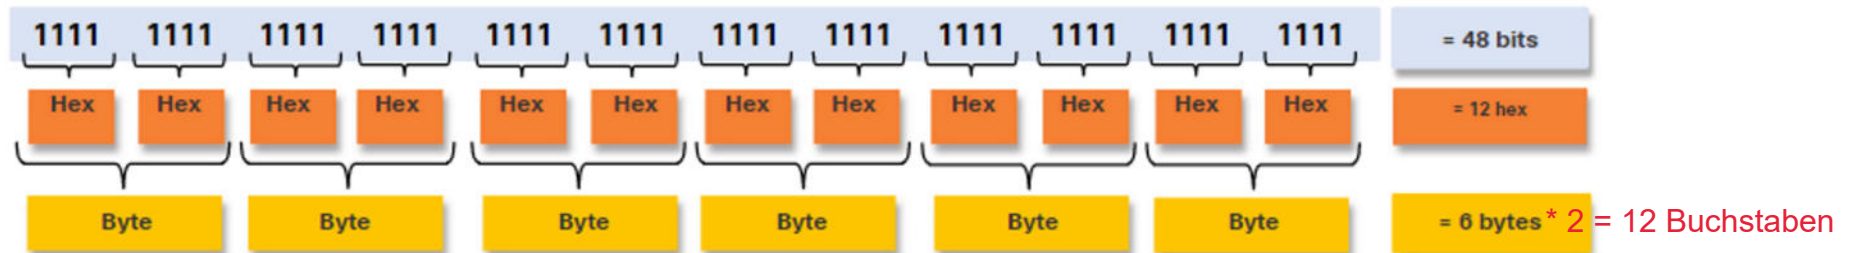

For example, assume that Cisco needs to assign a unique MAC address to a new device. The IEEE has assigned Cisco a OUI of **00-60-2F**. Cisco would then configure the device with a unique vendor code such as **3A-07-BC**. Therefore, the Ethernet MAC address of that device would be **00-60-2F-3A-07-BC**.