



STANDARD

The economical runner system


Technical data sheet

www.blum.com

 **blum**[®]



- BLUMATIC self-closing feature (230M) and/or closed position stops (230E)
- Dyn. load bearing capacity 25 kg
- Lock-open stop (from nominal length NL of 300 mm)
- One-side guided runner system
- Epoxy-coated, Cream (RAL 9001)
- Can be combined with BLUMOTION for soft and effortless closing (230M)

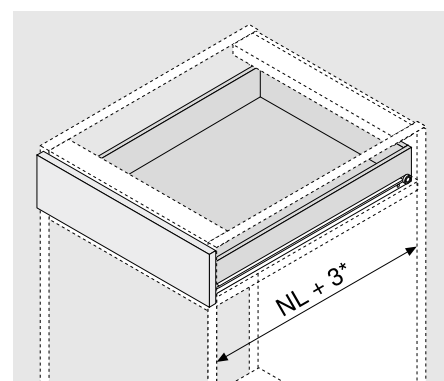


NL Nominal length

* If BLUMOTION is used, space requirement NL + 22 applies to NL 250

Ordering information

1	Cabinet and drawer profile left/right	
	Nominal length NL (mm)	Colour
		R9001
	250	230M2500
	300	230M3000
	350	230M3500
	400	230M4000
	450	230M4500
	500	230M5000
	550	230M5500
	600	230M6000
	650	230M6500
	700	230E7000
	750	230E7500
	800	230E8000
RAL 9001 cream		

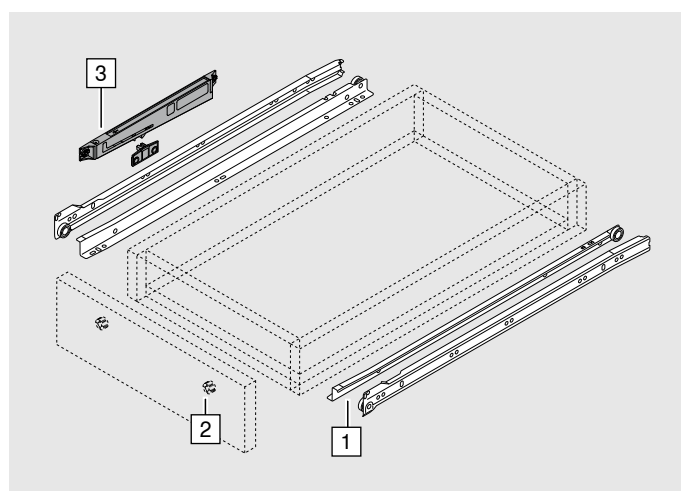

Accessories


2	Front adjustment bracket		
	Material	Colour	
	Nylon	Natural	295.1000

3	BLUMOTION and latch set for STANDARD 230M		
	Material	Colour	
	Nylon	WGR/R9001	Z70.1320
	WGR	White grey	
	RAL 9001	Cream	

	Positioning and screwing template for latches		
	Material	Colour	
	Nylon	Orange	65.3400


Planning

Space requirements in the cabinet

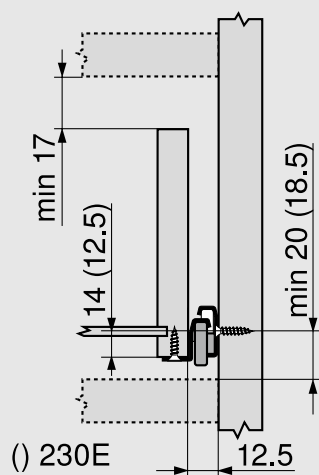

Cabinet profile screw positions


NL (mm)

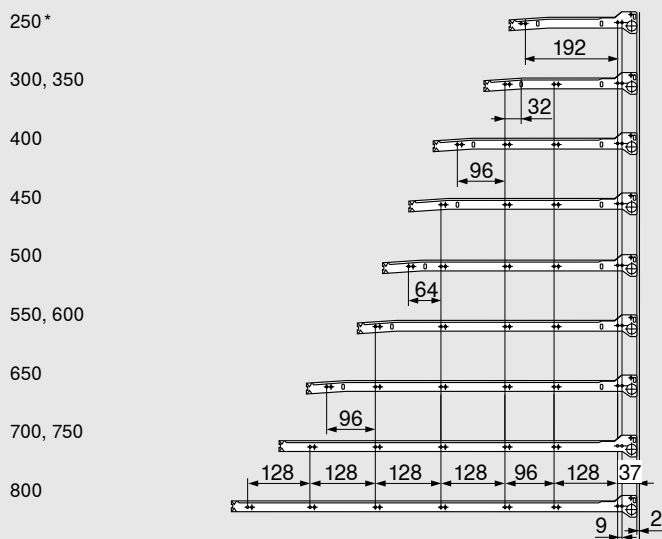

Min. internal cabinet depth = NL + 3 mm

* If BLUMOTION is used, min. internal cabinet depth
NL + 22 mm applies to NL 250


Cutting dimensions for 16 mm chipboard



KB Cabinet width

LW Internal cabinet width


NL Nominal length




Drawer base


NL


STANDARD 230M BLUMOTION

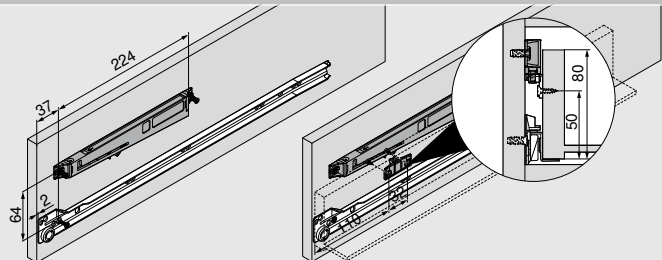




Accessories

Front adjustment bracket	
	With pre-mounted steel washer
	For four sided drawers
	2-dimensional front adjustment (± 2 mm)
	Material: nylon
	Colour: natural
	295.1000


Insertion ram for MINIPRESS	
	MZM.0095

Pull-out shelf corner connectors	
	Colour: RAL 9001 cream
	Colour: RAL 7037 dust grey
	Material: nylon
	2 tier
	3 tier
	ZTU.00Z0
	ZTU.00D0


Planning

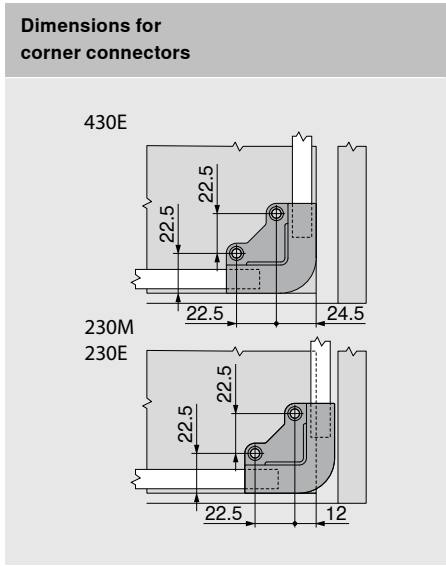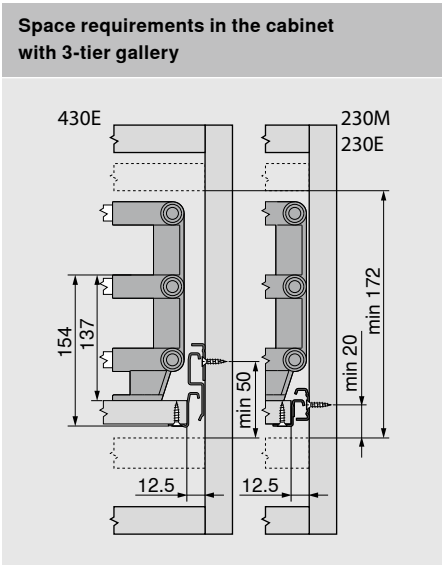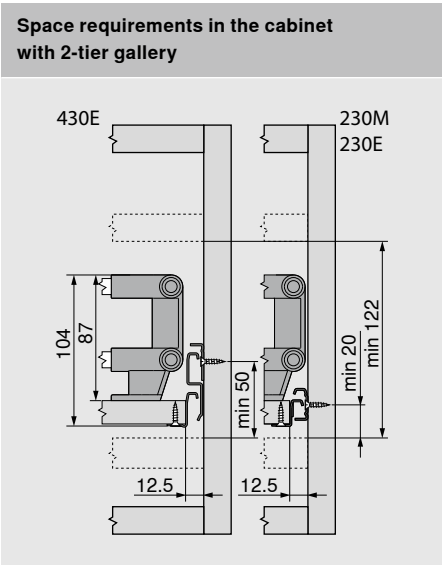

Accessories




Gallery rail for pull-out shelf connectors			
	For cutting to size		
	Material: aluminium		
	RAL 9001 cream	ZRG.1104U	
	Chrome plated	ZRG.1094U	

Cutting	
Longside gallery rail	NL – 51 mm
Cross gallery rail 230M 230E	LW – 63 mm

Door protector	
	Only for inset applications
	Left or right, symmetrical
	2-dimensional front adjustment (± 2 mm)
	Material: steel
	Colour: RAL 9001 cream
	298.2200


Front fixing bracket	
	Left/right
	3-dimensional front adjustment
	2-dimensional front adjustment (± 2 mm)
	For pull-out shelves with front
	Material: steel
	Colour: RAL 9001 cream
	296.4500

Planning

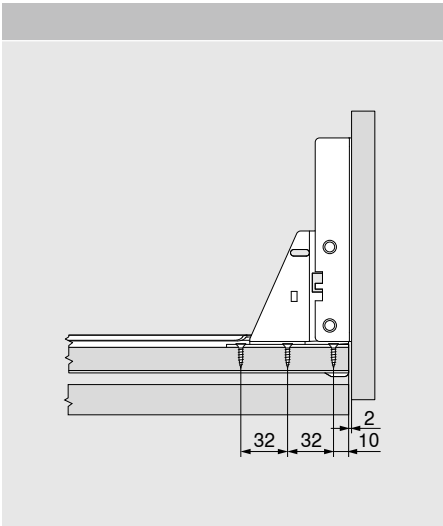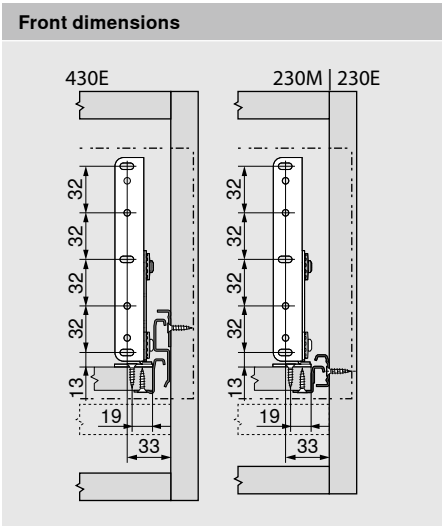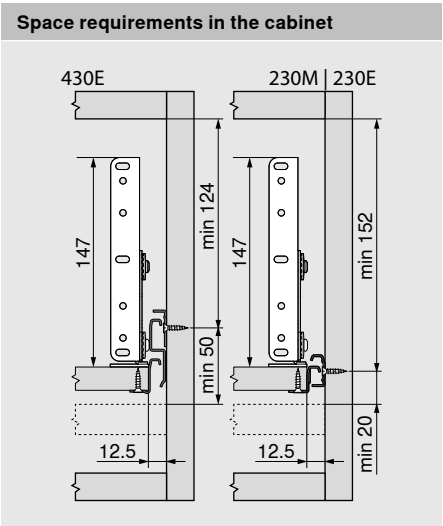

Cabinet profile fixing












Cabinet profile 230M | 230E – 25 kg

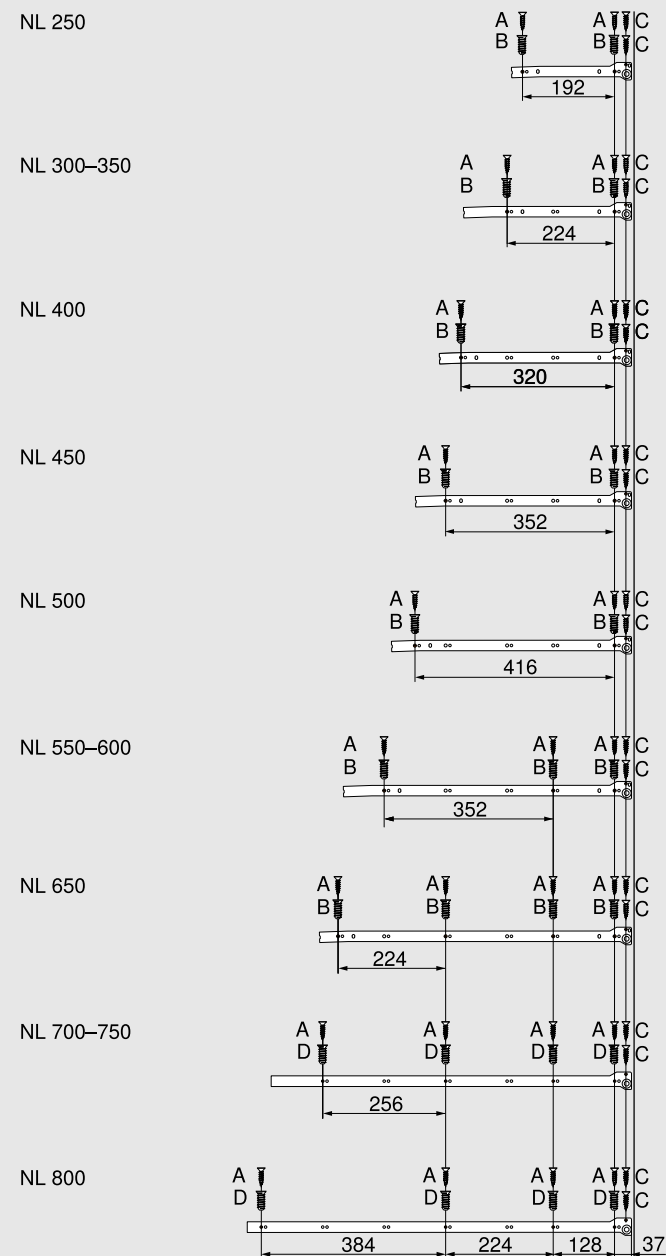

NL	Nominal length
A	Chipboard screw Ø 4 x 15 mm
B	System screw, part no. 661.1450.HG
C	Chipboard screw Ø 3.5 x 15 mm for high fronted pull-out
D	Special system screw, part no. 662.1450.HG

Assembly, adjustment and removal

230M/E

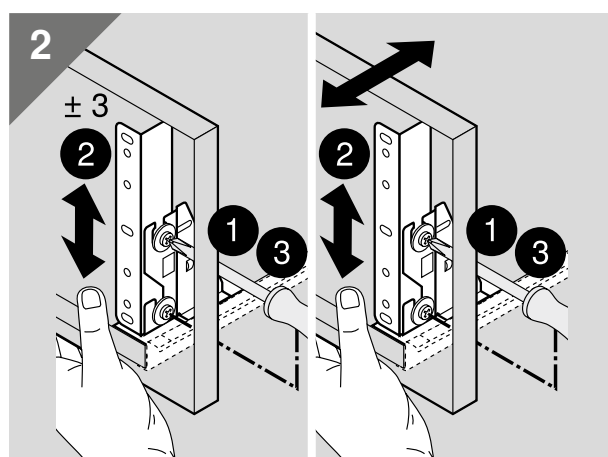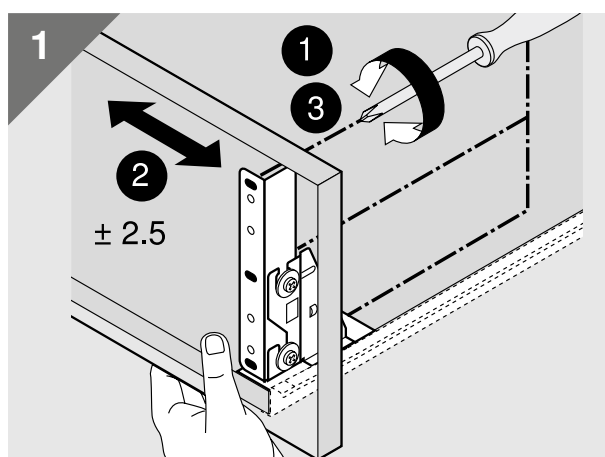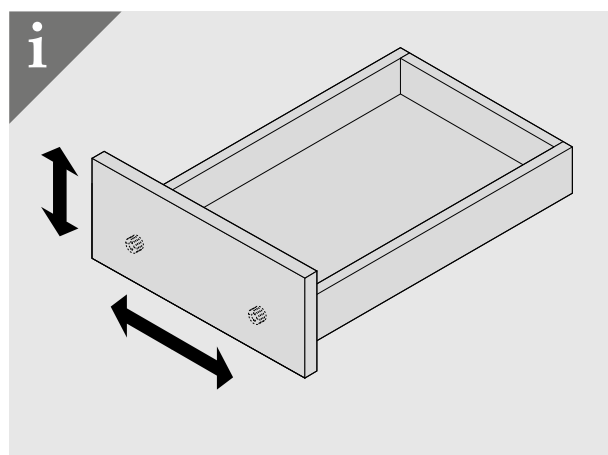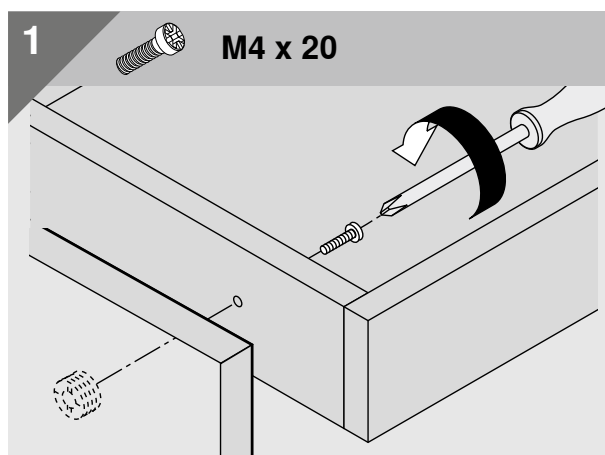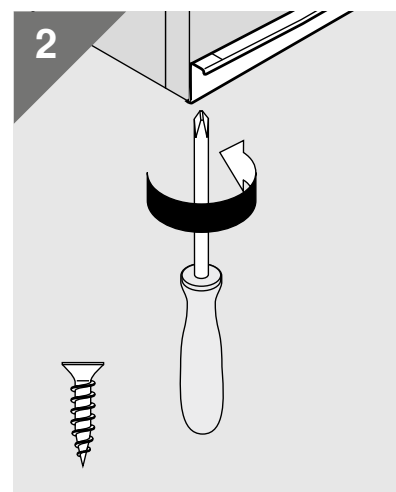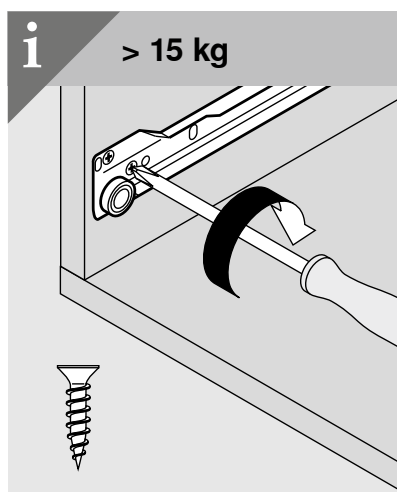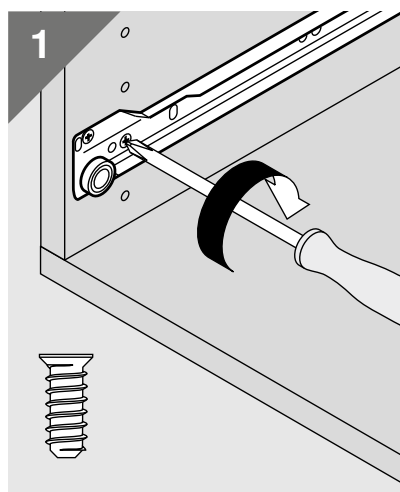

Julius Blum GmbH
Furniture Fittings Mfg.
6973 Höchst, Austria
Tel.: +43 5578 705-0
Fax: +43 5578 705-44
E-mail: info@blum.com
www.blum.com

Our sites in Austria, Poland and China are certified to the international standards mentioned below.
Our site in the USA is certified to ISO 9001.
Our site in Brazil is certified to ISO 9001 and ISO 14001.



ISO 9001
Certified Quality
System



ISO 14001
Certified Environmental
System



ISO 50001
Certified Energy
System



Look for our
FSC™-certified
products

All content is copyrighted by Blum.
Subject to technical modifications and changes to the range without notice.
TD-130/1 EN-AL/05.21