



#### NOTES:

1. COUNTERSINK HOLES (1/16" MAX. DEPTH) FOR TRUCK BOLTS ON TOP SIDE OF SKATEBOARD DECK.
2. ROUND ALL EDGES TO 1/8" RADIUS.
3. DECK CONSTRUCTION - 7 PLYS 1/16" CANADIAN HARD MAPLE VENEER.
4. DECK GRADE LAYUP (BOTTOM TO TOP) - FACE, CORE, CROSSBAND, CORE, CROSSBAND, CORE, FACE - USE WATER-BASED WOOD GLUE SUCH AS FRANKLIN MULTIBOND SK-8 OR SIMILAR.
5. FINISH DECK WITH SANDING (PER MANUFACTURER'S STANDARDS), WATER-BASED SEALER AND GRAPHICS (SPECIFIED OUTSIDE OF THIS DRAWING).
6. RE-DRILL BOLT HOLES AFTER CLEAR-COATING.
7. DECKS ARE PRESSED FOUR AT A TIME - CURVED FEATURE DIMENSIONS MAY VARY SLIGHTLY.

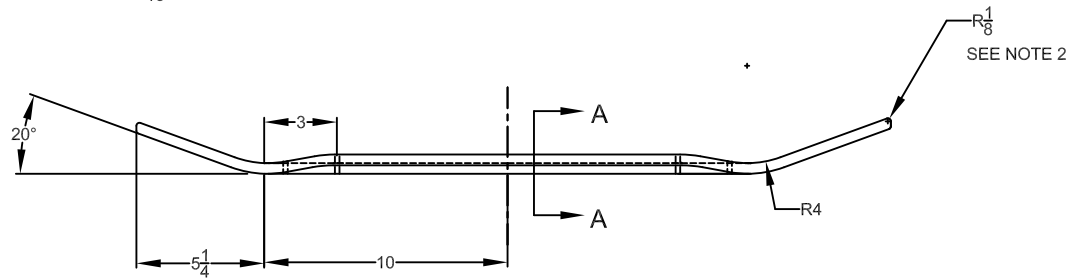

BIS #: 7.5"-30.5"-20°-20"-6.1"-5.25"-3"-3

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.

#### TOLERANCES:

LENGTHS:  $\pm 1/16"$

RADIAL:  $\pm 1/16"$

HOLES:  $+1/16"$ ,  $-0"$

ANGULAR:  $\pm 2^\circ$

REV.	BY	DESCRIPTION	DATE
1	OPENSOURCE(SKATEBOARDS);	MODIFIED NOTE 7	FEB 2015
0	OPENSOURCE(SKATEBOARDS);	INITIAL RELEASE	NOV 2014

DESIGNED BY  
OPENSOURCE(SKATEBOARDS);  
AN UNLESS DESIGN, LLC BRAND.

DESIGNED IN SAN DIEGO, CA.  
WWW.OPENSOURCEBOARDS.COM

FS-STREET HYBRID V1

THIS DRAWING MAY BE COPIED, MODIFIED, AND DISTRIBUTED. PLEASE VISIT OPENSOURCEBOARDS.COM FOR OFFICIAL OPENSOURCE(SKATEBOARDS); BRAND DRAWINGS.