



TABLE OF CONTENTS

Elevations

Operator Units	2
2-Wide Units	4
3-Wide Units	5
4-Wide Units	7
5-Wide Units	9
Picture Units	11
Half Round Units	20
Quarter Round Units	21
Ellipse Units	22
Single Transom Units	23
2-Wide Transom Units	24
3-Wide Transom Units	25
4-Wide Transom Units	26
5-Wide Transom Units	27
Operator with 15" Transom	28
Operator with 24" Transom	30
2-Wide Operator with 15" Transom	32
2-Wide Operator with 24" Transom	34
3-Wide Operator with 15" Transom	36
3-Wide Operator with 24" Transom	38

Note:

Elevations shown DO NOT have exterior trim.

For other Trim Options refer to the Unit Sizing, Rough Opening and Masonry Opening page.



OPERATOR UNITS

MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	24 7/8" (632) 25 3/8" (645) 22 1/8" (562) 21 3/8" (543) 16 1/16" (408)	28 7/8" (733) 29 3/8" (746) 26 1/8" (664) 25 3/8" (645) 20 1/16" (510)	32 7/8" (835) 33 3/8" (848) 30 1/8" (765) 29 3/8" (746) 24 1/16" (611)	36 7/8" (937) 37 3/8" (949) 34 1/8" (867) 33 3/8" (848) 24 1/16" (611)	42 7/8" (1089) 41 3/8" (1102) 38 1/8" (968) 37 3/8" (949) 32 1/16" (814)	44 7/8" (1140) 45 3/8" (1153) 42 1/8" (1070) 41 3/8" (1051) 36 1/16" (916)
39 1/16" (992) 40 9/16" (1030) 36 3/4" (933) 36" (914) 14 11/16" (373) [2]						
43 1/16" (1094) 44 9/16" (1132) 40 3/4" (1035) 40" (1016) 16 11/16" (424) [2]						
51 1/16" (1297) 52 9/16" (1335) 48 3/4" (1238) 48" (1219) 20 11/16" (525) [2]						
55 1/16" (1399) 56 9/16" (1437) 52 3/4" (1340) 52" (1321) 22 11/16" (576) [2]						
59 1/16" (1500) 60 9/16" (1538) 56 3/4" (1441) 56" (1441) 24 11/16" (627) [2]						
63 1/16" (1602) 64 9/16" (1640) 60 3/4" (1543) 60" (1543) 26 11/16" (676) [2]						

ELEVATION SYMBOL LEGEND:
VALUES IN () ARE IN MILLIMETER CONVERSIONS.
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT.
##* NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.
##** NUMBER INDICATES OPTIONAL DESIGN PRESSURE (DP) RATING.
E1 UNITS WITH AN E1 EGRESS DESIGNATION MEET 5.0 SQ. FT. EGRESS WITH A DP35 SILL STOP, BUT NOT WITH A DP 50 SILL STOP
E2 UNITS WITH AN E2 EGRESS DESIGNATION MEET 5.0 SQ. FT. EGRESS WITH EITHER A DP35 OR A DP 50 SILL STOP
E3 UNITS WITH AN E3 EGRESS DESIGNATION MEET 5.7 SQ. FT. EGRESS WITH A DP35 SILL STOP, BUT NOT WITH A DP 50 SILL STOP
E4 UNITS WITH AN E4 EGRESS DESIGNATION MEET 5.0 SQ. FT. EGRESS WITH EITHER A DP35 OR A DP 50 SILL STOP



OPERATOR UNITS

	MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	24 7/8" (632) 25 3/8" (645) 22 1/8" (562) 21 3/8" (543) 16 1/16" (408)	28 7/8" (733) 29 3/8" (746) 26 1/8" (664) 25 3/8" (645) 20 1/16" (510)	32 7/8" (835) 33 3/8" (848) 30 1/8" (765) 29 3/8" (746) 24 1/16" (611)	36 7/8" (937) 37 3/8" (949) 34 1/8" (867) 33 3/8" (848) 28 1/16" (716)	42 7/8" (1089) 41 3/8" (1102) 38 1/8" (968) 37 3/8" (949) 32 1/16" (814)	44 7/8" (1140) 45 3/8" (1153) 42 1/8" (1070) 41 3/8" (1051) 36 1/16" (916)
67 1/16" (1703) 68 9/16" (1741) 64 3/4" (1645) 64" (1626) 27 1/16" (703) [2]							
	25CDH2164	25CDH2564	25CDH2964	25CDH3364	25CDH3764	25CDH4164	
			E2	E4	E4	E3	
71 1/16" (1805) 72 9/16" (1843) 68 3/4" (1746) 68" (1727) 30 1/16" (779) [2]							
	25CDH2168	25CDH2568	25CDH2968	25CDH3368	25CDH3768		
			E2	E4	E4		
75 1/16" (1907) 76 9/16" (1945) 72 3/4" (1846) 72" (1828) 32 1/16" (830) [2]							
	25CDH2172	25CDH2572	25CDH2972	25CDH3372	25CDH3772		
			E4	E4	E4		
79 1/16" (2008) 80 9/16" (2046) 76 3/4" (1949) 76" (1930) 34 1/16" (861) [2]							
	25CDH2176	25CDH2576	25CDH2976	25CDH3376	25CDH3776		
		E2	E4	E4	E4		

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS.

VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT.

##* NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

###* NUMBER INDICATES OPTIONAL DESIGN PRESSURE (DP) RATING.

E1 UNITS WITH AN E1 EGRESS DESIGNATION MEET 5.0 SQ FT EGRESS WITH A DP35 SILL STOP, BUT NOT WITH A DP 50 SILL STOP

E2 UNITS WITH AN E2 EGRESS DESIGNATION MEET 5.0 SQ FT EGRESS WITH EITHER A DP35 OR A DP 50 SILL STOP

E3 UNITS WITH AN E3 EGRESS DESIGNATION MEET 5.7 SQ FT EGRESS WITH A DP35 SILL STOP, BUT NOT WITH A DP 50 SILL STOP

E4 UNITS WITH AN E4 EGRESS DESIGNATION MEET 5.0 SQ FT EGRESS WITH EITHER A DP35 OR A DP 50 SILL STOP



2-WIDE UNITS

MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	46 1/4" (1175) 46 3/4" (1197) 43 1/2" (1105) 42 3/4" (1086) 16 1/16" (408) [2]	54 1/4" (1378) 54 3/4" (1391) 51 1/2" (1308) 50 3/4" (1289) 20 1/16" (510) [2]	62 1/4" (1581) 62 3/4" (1594) 59 1/2" (1511) 58 3/4" (1492) 24 1/16" (611) [2]	70 1/4" (1784) 70 3/4" (1797) 67 1/2" (1715) 66 3/4" (1696) 28 1/16" (716) [2]	78 1/4" (1988) 78 3/4" (2000) 75 1/2" (1918) 74 3/4" (1899) 32 1/16" (814) [2]	86 1/4" (2191) 86 3/4" (2203) 83 1/2" (2121) 82 3/4" (2102) 36 1/16" (916) [2]
39 1/16" (992) 40 9/16" (1030) 39 3/4" (1003) 39 5/8" (995) [2]						
43 1/16" (1094) 44 9/16" (1132) 40 3/4" (1035) 40" (1016) 16 11/16" (424) [2]						
51 1/16" (1297) 52 9/16" (1335) 48 3/4" (1238) 48" (1219) 20 11/16" (525) [2]						
55 1/16" (1399) 56 9/16" (1437) 52 3/4" (1340) 52" (1321) 22 11/16" (576) [2]						
58 1/16" (1500) 60 9/16" (1538) 56 3/4" (1441) 56" (1441) 24 11/16" (627) [2]						
63 1/16" (1602) 64 9/16" (1640) 60 3/4" (1543) 60" (1543) 26 11/16" (676) [2]						
67 1/16" (1703) 68 9/16" (1741) 64 3/4" (1645) 64" (1626) 27 11/16" (703) [2]						
71 1/16" (1805) 72 9/16" (1843) 68 3/4" (1746) 68" (1727) 30 11/16" (779) [2]						
75 1/16" (1907) 76 9/16" (1945) 72 3/4" (1848) 72" (1829) 32 11/16" (830) [2]						
79 1/16" (2008) 80 9/16" (2046) 76 3/4" (1949) 76" (1930) 34 11/16" (881) [2]						

ELEVATION SYMBOL LEGEND:
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E UNIT MEETS EGRESS REQUIREMENTS FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT. SEE NOTES ON SINGLE UNIT ELEVATIONS FOR SPECIFIC EGRESS CAPABILITY.










3-WIDE UNITS

MO BRICKMOLD	67 5/8" (1718)	79 5/8" (2022)	91 5/8" (2327)	103 5/8" (2632)	115 5/8" (2937)
MO FLAT CASING	68 1/8" (1730)	80 1/8" (2035)	92 1/8" (2340)	104 1/8" (2645)	116 1/8" (2950)
ROUGH OPENING	64 7/8" (1648)	76 7/8" (1953)	88 7/8" (2257)	100 7/8" (2562)	112 7/8" (2867)
FRAME SIZE	64 1/8" (1629)	76 1/8" (1934)	88 1/8" (2238)	100 1/8" (2543)	112 1/8" (2848)
DAYLIGHT OPENING	16 1/16" (408) [3]	20 1/16" (510) [3]	24 1/16" (611) [3]	28 1/16" (713) [3]	32 1/16" (814) [3]
39 1/16" (992) 40 9/16" (1030) 40 3/4" (933) 36" (914) 36" (914) 14 11/16" (373) [2]					
43 1/16" (1094) 44 9/16" (1132) 40 3/4" (1030) 40 3/4" (1030) 16 11/16" (424) [2]					
51 1/16" (1297) 52 9/16" (1335) 48 3/4" (1248) 48 3/4" (1248) 20 11/16" (525) [2]					
55 1/16" (1399) 56 9/16" (1437) 52 3/4" (1340) 52 3/4" (1340) 22 11/16" (576) [2]					
59 1/16" (1500) 60 9/16" (1538) 56 3/4" (1441) 56 3/4" (1441) 24 11/16" (627) [2]					
63 1/16" (1602) 64 9/16" (1640) 60 3/4" (1543) 60 3/4" (1543) 26 11/16" (678) [2]					
67 1/16" (1703) 68 9/16" (1741) 64 3/4" (1645) 64 3/4" (1645) 27 11/16" (709) [2]					
71 1/16" (1805) 72 9/16" (1843) 68 3/4" (1746) 68 3/4" (1746) 30 11/16" (779) [2]					
75 1/16" (1907) 76 9/16" (1945) 72 3/4" (1848) 72 3/4" (1848) 32 11/16" (830) [2]					
79 1/16" (2008) 80 9/16" (2046) 76 3/4" (1949) 76 3/4" (1949) 34 11/16" (881) [2]					

ELEVATION SYMBOL LEGEND: VALUES IN () ARE IN MILLIMETER CONVERSIONS. VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT.



3-WIDE UNITS

MO BRICKMOLD	127 5/8" (3242)
MO FLAT CASING	128 1/8" (3254)
ROUGH OPENING	124 7/8" (3172)
FRAME SIZE	124 1/8" (3153)
DAYLIGHT OPENING	36 1/16" (916) [3]
39 1/16" (992)	
40 9/16" (1030)	
36 3/4" (933)	
36" (914)	
43 1/16" (1094)	
44 9/16" (1132)	
40 3/4" (1035)	
16 11/16" (424) [2]	
51 1/16" (1297)	
52 9/16" (1335)	
48 3/4" (1235)	
20 11/16" (525) [2]	
55 1/16" (1399)	
56 9/16" (1437)	
52 3/4" (1340)	
22 11/16" (576) [2]	
59 1/16" (1500)	
60 9/16" (1538)	
56 3/4" (1441)	
24 11/16" (627) [2]	
63 1/16" (1602)	
64 9/16" (1640)	
60 3/4" (1543)	
26 11/16" (678) [2]	
67 1/16" (1703)	
68 9/16" (1741)	
64 3/4" (1645)	
27 11/16" (703) [2]	

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS

VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

E UNIT MEETS EGRESS REQUIREMENTS FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS.

CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.

SEE NOTES ON SINGLE UNIT ELEVATIONS FOR SPECIFIC EGRESS CAPABILITY.



4-WIDE UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


89" (2261)
89 1/2" (2273)
86 1/4" (2191)
85 1/2" (2172)
16 1/16" (408) [4]

105" (2667)
105 1/2" (2680)
102 1/4" (2597)
101 1/2" (2578)
20 1/16" (510) [4]


121" (3073)
121 1/2" (3086)
118 1/4" (3004)
117 1/2" (2985)
24 1/16" (611) [4]

137" (3480)
137 1/2" (3493)
134 1/4" (3410)
133 1/2" (3391)
28 1/16" (713) [4]


39 1/16" (992)
40 9/16" (1030)
36 3/4" (933)
36" (914)
14 1/16" (373) [2]
43 1/16" (1094)
44 9/16" (1132)
40 3/4" (1030)
40" (1016)
16 1/16" (424) [2]




25CDH2136-4



25CDH2536-4



25CDH2936-4



25CDH3336-4

51 1/16" (1297)
52 9/16" (1335)
48 3/4" (1238)
48" (1219)
20 1/16" (525) [2]




25CDH2140-4



25CDH2540-4



25CDH2940-4



25CDH3340-4

55 1/16" (1399)
56 9/16" (1437)
52 3/4" (1340)
52" (1321)
22 1/16" (576) [2]



25CDH2148-4



25CDH2548-4



25CDH2948-4




25CDH3348-4

59 1/16" (1500)
60 9/16" (1538)
56 3/4" (1441)
56" (1417)
24 1/16" (627) [2]



25CDH2156-4



25CDH2556-4



25CDH2956-4



25CDH3352-4

63 1/16" (1602)
64 9/16" (1640)
60 3/4" (1543)
60" (1524)
26 1/16" (679) [2]



25CDH2160-4



25CDH2560-4



25CDH2960-4



25CDH3360-4

67 1/16" (1703)
68 9/16" (1741)
64 3/4" (1645)
64" (1626)
27 1/16" (703) [2]




25CDH2164-4



25CDH2564-4



25CDH2964-4



25CDH3364-4

71 1/16" (1805)
72 9/16" (1843)
68 3/4" (1746)
68" (1727)
30 1/16" (779) [2]



25CDH2168-4



25CDH2568-4



25CDH2968-4




25CDH3368-4

75 1/16" (1907)
76 9/16" (1945)
72 3/4" (1848)
72" (1829)
32 1/16" (830) [2]



25CDH2172-4



25CDH2572-4



25CDH2972-4



25CDH3372-4

79 1/16" (2008)
80 9/16" (2046)
76 3/4" (1949)
76" (1930)
34 1/16" (881) [2]



25CDH2176-4



25CDH2576-4



25CDH2976-4



25CDH3376-4

ELEVATION SYMBOL LEGEND: VALUES IN () ARE IN MILLIMETER CONVERSIONS. VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT.



4-WIDE UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

153" (3886)
153 1/2" (3899)
150 1/4" (3816)
149 1/2" (3797)
32 1/16" (814) [4]

39 1/16" (992)
40 9/16" (1030)
40 3/4" (1033)
38" (964)
14 1/16" (373) [2]



25CDH3736-4

43 1/16" (1094)
44 9/16" (1132)
40 3/4" (1036)
40" (1016)
18 1/16" (454) [2]



25CDH3740-4

51 1/16" (1297)
52 9/16" (1335)
48 3/4" (1238)
48" (1219)
20 1/16" (505) [2]



25CDH3748-4

55 1/16" (1399)
56 9/16" (1437)
52 3/4" (1340)
52" (1321)
22 1/16" (576) [2]



25CDH3752-4

59 1/16" (1500)
60 9/16" (1538)
56 3/4" (1441)
56" (1441)
24 1/16" (607) [2]



25CDH3756-4

63 1/16" (1602)
64 9/16" (1640)
60 3/4" (1543)
60" (1543)
26 1/16" (678) [2]




25CDH3760-4

67 1/16" (1703)
68 9/16" (1741)
64 3/4" (1645)
64" (1626)
27 1/16" (703) [2]




25CDH3764-4

71 1/16" (1805)
72 9/16" (1843)
68 3/4" (1746)
68" (1727)
30 1/16" (779) [2]




25CDH3768-4

75 1/16" (1907)
76 9/16" (1945)
72 3/4" (1848)
72" (1829)
32 1/16" (830) [2]



25CDH3772-4

79 1/16" (2008)
80 9/16" (2046)
76 3/4" (1949)
76" (1930)
34 1/16" (881) [2]



25CDH3776-4

ELEVATION SYMBOL LEGEND: VALUES IN () ARE IN MILLIMETER CONVERSIONS. VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT.



5-WIDE UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

110 3/8" (2804)
110 7/8" (2816)
107 5/8" (2734)
106 7/8" (2715)
16 1/16" (408) [5]

130 3/8" (3312)
130 7/8" (3324)
127 5/8" (3242)
126 7/8" (3223)
20 1/16" (510) [5]

150 3/8" (3820)
150 7/8" (3832)
147 5/8" (3750)
146 7/8" (3731)
24 1/16" (611) [5]

39 1/16" (992)
40 9/16" (1030)
36 3/4" (933)
36" (914)
14 11/16" (373) [2]



25CDH2136-5



25CDH2536-5



25CDH2936-5

43 1/16" (1094)
44 9/16" (1132)
40 3/4" (1035)
40" (1016)
16 11/16" (424) [2]



25CDH2140-5



25CDH2540-5



25CDH2940-5

51 1/16" (1297)
52 9/16" (1335)
48 3/4" (1236)
48" (1219)
20 11/16" (525) [2]



25CDH2148-5



25CDH2548-5



25CDH2948-5

55 1/16" (1399)
56 9/16" (1437)
52 3/4" (1340)
52" (1321)
22 11/16" (576) [2]



25CDH2152-5



25CDH2552-5



25CDH2952-5

59 1/16" (1500)
60 9/16" (1538)
56 3/4" (1441)
56" (1441)
24 11/16" (627) [2]



25CDH2156-5




25CDH2556-5




25CDH2956-5

63 1/16" (1602)
64 9/16" (1640)
60 3/4" (1543)
60" (1543)
26 11/16" (678) [2]



25CDH2160-5



25CDH2560-5



25CDH2960-5

67 1/16" (1703)
68 9/16" (1741)
64 3/4" (1645)
64" (1626)
27 11/16" (703) [2]



25CDH2164-5



25CDH2564-5



25CDH2964-5

71 1/16" (1805)
72 9/16" (1843)
68 3/4" (1746)
68" (1727)
30 11/16" (779) [2]



25CDH2168-5



25CDH2568-5



25CDH2968-5

75 1/16" (1907)
76 9/16" (1945)
72 3/4" (1848)
72" (1829)
32 11/16" (830) [2]



25CDH2172-5




25CDH2572-5




25CDH2972-5


79 1/16" (2008)
80 9/16" (2046)
76 3/4" (1949)
76" (1930)
34 11/16" (881) [2]



25CDH2176-5



25CDH2576-5



25CDH2976-5

ELEVATION SYMBOL LEGEND: VALUES IN () ARE IN MILLIMETER CONVERSIONS. VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT.



5-WIDE UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

170 3/8" (4328)
170 7/8" (4340)
167 5/8" (4258)
166 7/8" (4239)
28 1/16" (713) [5]

190 3/8" (4836)
190 7/8" (4848)
187 5/8" (4766)
186 7/8" (4747)
32 1/16" (814) [5]

38 1/16" (992)
40 9/16" (1030)
36 3/4" (933)
36" (914)
14 11/16" (373) [2]



25CDH3336-5



25CDH3736-5

43 1/16" (1094)
44 9/16" (1132)
40 3/4" (1035)
40" (1016)
16 11/16" (424) [2]



25CDH3340-5



25CDH3740-5

51 1/16" (1297)
52 9/16" (1335)
48 3/4" (1238)
48" (1219)
20 11/16" (525) [2]



25CDH3348-5



25CDH3748-5

55 1/16" (1399)
56 9/16" (1437)
52 3/4" (1340)
52" (1321)
22 11/16" (576) [2]



25CDH3352-5



25CDH3752-5

59 1/16" (1500)
60 9/16" (1538)
56 3/4" (1441)
56" (1441)
24 11/16" (627) [2]



25CDH3356-5



25CDH3756-5

63 1/16" (1602)
64 9/16" (1640)
60 3/4" (1543)
60" (1543)
26 11/16" (678) [2]



25CDH3360-5



25CDH3760-5

67 1/16" (1703)
68 9/16" (1741)
64 3/4" (1646)
64" (1626)
27 11/16" (703) [2]



25CDH3364-5



25CDH3764-5

71 1/16" (1805)
72 9/16" (1843)
68 3/4" (1746)
68" (1727)
30 11/16" (779) [2]



25CDH3368-5



25CDH3768-5

75 1/16" (1907)
76 9/16" (1945)
72 3/4" (1848)
72" (1829)
32 11/16" (830) [2]



25CDH3372-5



25CDH3772-5

79 1/16" (2008)
80 9/16" (2046)
76 3/4" (1949)
76" (1930)
34 11/16" (881) [2]



25CDH3376-5



























































25CDH3776-5

ELEVATION SYMBOL LEGEND: VALUES IN () ARE IN MILLIMETER CONVERSIONS. VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT.



PICTURE UNITS











































MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	15 1/2" (394) 16" (406) 12 3/4" (324) 12" (305) 6 11/16" (170)	21 1/2" (546) 22" (559) 18 3/4" (476) 18" (457) 12 11/16" (322)	27 1/2" (699) 28" (711) 24 3/4" (629) 24" (610) 18 11/16" (475)	33 1/2" (851) 34" (864) 30 3/4" (781) 30" (762) 24 11/16" (627)	39 1/2" (1003) 40" (1016) 36 3/4" (933) 36" (914) 30 11/16" (779)	43 1/2" (1105) 44" (1118) 40 3/4" (1035) 40" (1016) 34 11/16" (881)	45 1/2" (1156) 46" (1168) 42 3/4" (1086) 42" (1067) 36 11/16" (932)
15 1/16" (383) 16 9/16" (421) 12 3/4" (324) 12" (305) 7 1/4" (184)							
21 1/16" (535) 22 9/16" (573) 18 3/4" (476) 18" (457) 13 1/4" (337)							
27 1/16" (687) 28 9/16" (725) 24 3/4" (629) 24" (610) 19 1/4" (489)							
33 1/16" (840) 34 9/16" (878) 30 3/4" (781) 30" (762) 25 1/4" (641)							
39 1/16" (982) 40 9/16" (1030) 36 3/4" (933) 36" (914) 31 1/4" (794)							
43 1/16" (1094) 44 9/16" (1132) 40 3/4" (1035) 40" (1016) 35 1/4" (895)							
45 1/16" (1145) 46 9/16" (1183) 42 3/4" (1086) 42" (1067) 37 1/4" (946)							
51 1/16" (1297) 52 9/16" (1335) 48 3/4" (1238) 48" (1219) 43 1/4" (1099)							

VALUES IN () ARE IN MILLIMETER CONVERSIONS.

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING



PICTURE UNITS

MO BRICKMOLD	15 1/2" (394)	21 1/2" (546)	27 1/2" (699)	33 1/2" (851)	39 1/2" (1003)	43 1/2" (1105)	45 1/2" (1156)
MO FLAT CASING	16" (406)	22" (559)	28" (711)	34" (864)	40" (1016)	44" (1118)	46" (1168)
ROUGH OPENING	12 3/4" (324)	18 3/4" (476)	24 3/4" (629)	30 3/4" (781)	36 3/4" (933)	40 3/4" (1035)	42 3/4" (1086)
FRAME SIZE	12" (305)	18" (457)	24" (610)	30" (762)	36" (914)	40" (1016)	42" (1067)
DAYLIGHT OPENING	6 11/16" (170)	12 11/16" (322)	18 11/16" (475)	24 11/16" (627)	30 11/16" (779)	34 11/16" (881)	36 11/16" (932)
57 1/16" (1449) 58 9/16" (1487) 54 3/4" (1391) 54 1/4" (1375) 49 1/4" (1251)							
	25CDHP1254	25CDHP1854	25CDHP2454	25CDHP3054	25CDHP3654	25CDHP4054	25CDHP4254
							
	25CDHP1256	25CDHP1856	25CDHP2456	25CDHP3056	25CDHP3656	25CDHP4056	25CDHP4256
63 1/16" (1602) 64 9/16" (1640) 62 3/4" (1604) 62 1/4" (1576) 55 1/4" (1403)							
	25CDHP1260	25CDHP1860	25CDHP2460	25CDHP3060	25CDHP3660	25CDHP4060	25CDHP4260
							
	25CDHP1264	25CDHP1864	25CDHP2464	25CDHP3064	25CDHP3664	25CDHP4064	25CDHP4264
67 1/16" (1703) 68 9/16" (1741) 64 3/4" (1665) 64 1/4" (1637) 59 1/4" (1505)							
	25CDHP1268	25CDHP1868	25CDHP2468	25CDHP3068	25CDHP3668	25CDHP4068	25CDHP4268
							
	25CDHP1268	25CDHP1868	25CDHP2468	25CDHP3068	25CDHP3668	25CDHP4068	25CDHP4268

VALUES IN () ARE IN MILLIMETER CONVERSIONS.


NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING




PICTURE UNITS

MO BRICKMOLD	15 1/2" (394)	21 1/2" (546)	27 1/2" (699)	33 1/2" (851)	39 1/2" (1003)	43 1/2" (1105)	45 1/2" (1156)
MO FLAT CASING	16" (406)	22" (559)	28" (711)	34" (864)	40" (1016)	44" (1118)	46" (1168)
ROUGH OPENING	12 3/4" (324)	18 3/4" (476)	24 3/4" (629)	30 3/4" (781)	36 3/4" (933)	40 3/4" (1035)	42 3/4" (1086)
FRAME SIZE	12" (305)	18" (457)	24" (610)	30" (762)	36" (914)	40" (1016)	42" (1067)
DAYLIGHT OPENING	6 11/16" (170)	12 11/16" (322)	18 11/16" (475)	24 11/16" (627)	30 11/16" (779)	34 11/16" (881)	36 11/16" (932)


75 1/16" (1907)
76 9/16" (1945)
77 3/4" (1948)
72" (1829)
67 1/4" (1708)

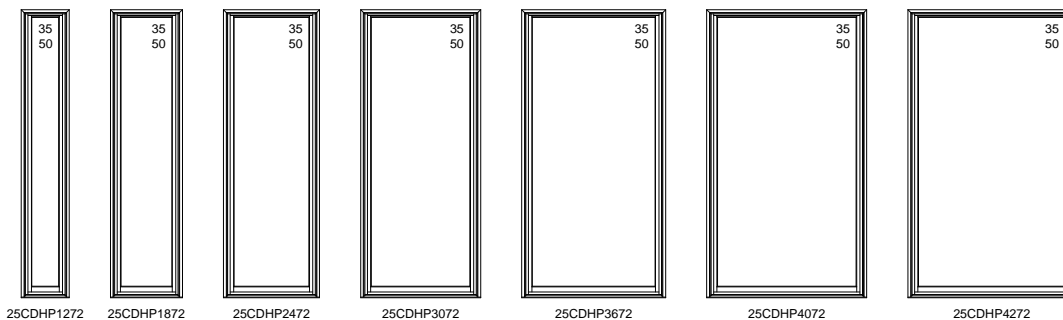

79 1/16" (2008)
80 9/16" (2046)
76 3/4" (1949)
76" (1930)
71 1/4" (1810)

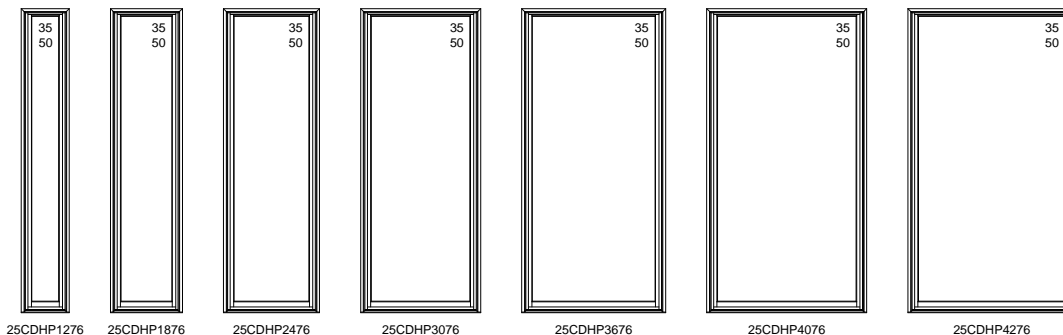

91 1/16" (2313)
92 9/16" (2351)
88 3/4" (2254)
88" (2235)
83 1/4" (2115)

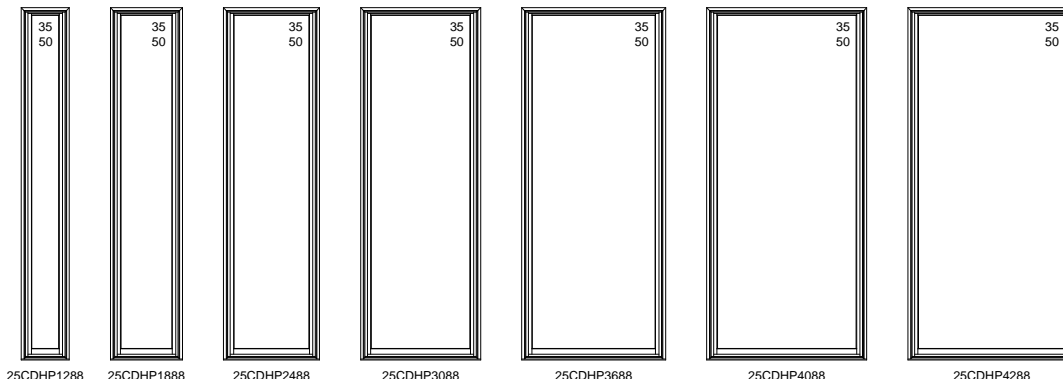

VALUES IN () ARE IN MILLIMETER CONVERSIONS.
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING



PICTURE UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

51 1/2" (1308)
52" (1321)
48 3/4" (1238)
48" (1219)
42 11/16" (1084)

51 7/8" (1318)
52 3/8" (1330)
50 1/8" (1273)
49 3/8" (1254)
43 1/16" (1094)

57 1/2" (1461)
58" (1473)
54 3/4" (1391)
54" (1372)
48 11/16" (1237)

63 1/2" (1613)
64" (1626)
60 3/4" (1543)
60" (1524)
54 11/16" (1389)

15 1/16" (383)
16 9/16" (421)
12 3/4" (324)
12" (305)
7 1/4" (184)



25CDHP4812



25CDHP4912




25CDHP5412




25CDHP6012


21 1/16" (535)
22 9/16" (573)
18 3/4" (476)
18" (457)
13 1/4" (337)




25CDHP4818



25CDHP4918




25CDHP5418




25CDHP6018

27 1/16" (687)
28 9/16" (725)
24 3/4" (629)
24" (610)
19 1/4" (489)



25CDHP4824



25CDHP4924




25CDHP5424




25CDHP6024


33 1/16" (840)
34 9/16" (878)
30 3/4" (781)
30" (762)
25 1/4" (641)




25CDHP4830



25CDHP4930




25CDHP5430



25CDHP6030

39 1/16" (992)
40 9/16" (1030)
36 3/4" (933)
36" (914)
31 1/4" (794)



25CDHP4836



25CDHP4936




25CDHP5436




25CDHP6036

43 1/16" (1094)
44 9/16" (1132)
40 3/4" (1035)
40" (1016)
35 1/4" (895)



25CDHP4840



25CDHP4940




25CDHP5440




25CDHP6040


45 1/16" (1145)
46 9/16" (1183)
42 3/4" (1086)
42" (1067)
37 1/4" (946)



25CDHP4842



25CDHP4942




25CDHP5442




25CDHP6042


51 1/16" (1297)
52 9/16" (1335)
48 3/4" (1238)
48" (1219)
43 1/4" (1099)




25CDHP4848



25CDHP4948



25CDHP5448



25CDHP6048

VALUES IN () ARE IN MILLIMETER CONVERSIONS.

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING



PICTURE UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


51 1/2" (1308)
52" (1321)
48 3/4" (1238)
48" (1219)
42 11/16" (1084)

51 7/8" (1318)
52 3/8" (1330)
50 1/8" (1273)
49 3/8" (1254)
43 1/16" (1094)


57 1/2" (1461)
58" (1473)
54 3/4" (1391)
54" (1372)
48 11/16" (1237)

63 1/2" (1613)
64" (1626)
60 3/4" (1543)
60" (1524)
54 11/16" (1389)


57 1/16" (1449)
58 9/16" (1487)
54 3/4" (1391)
54" (1372)
49 1/4" (1251)




25CDHP4854



25CDHP4954




25CDHP5454




25CDHP6054


59 1/16" (1500)
60 9/16" (1538)
56 3/4" (1441)
56" (1422)
51 1/4" (1302)




25CDHP4856



25CDHP4956




25CDHP5456




25CDHP6056


63 1/16" (1602)
64 9/16" (1640)
62 3/4" (1594)
60" (1524)
55 1/4" (1403)




25CDHP4860



25CDHP4960




25CDHP5460




25CDHP6060


67 1/16" (1703)
68 9/16" (1741)
64 3/4" (1645)
64" (1626)
59 1/4" (1505)




25CDHP4864



25CDHP4964




25CDHP5464




25CDHP6064


71 1/16" (1805)
72 9/16" (1843)
68 3/4" (1746)
68" (1727)
63 1/4" (1607)




25CDHP4868



25CDHP4968



25CDHP5468



25CDHP6068

VALUES IN () ARE IN MILLIMETER CONVERSIONS.

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING



PICTURE UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


51 1/2" (1308)
52" (1321)
48 3/4" (1238)
48" (1219)
42 11/16" (1084)

51 7/8" (1318)
52 3/8" (1330)
50 1/8" (1273)
49 3/8" (1254)
43 1/16" (1094)


57 1/2" (1461)
58" (1473)
54 3/4" (1391)
54" (1372)
48 11/16" (1237)

63 1/2" (1613)
64" (1626)
60 3/4" (1543)
60" (1524)
54 11/16" (1389)


75 1/16" (1907)
76 9/16" (1945)
72 3/4" (1848)
72" (1829)
67 1/4" (1708)




25CDHP4872



25CDHP4972




25CDHP5472




25CDHP6072


79 1/16" (2008)
80 9/16" (2046)
76 3/4" (1949)
76" (1930)
71 1/4" (1810)




25CDHP4876



25CDHP4976




25CDHP5476




25CDHP6076


91 1/16" (2313)
92 9/16" (2351)
88 3/4" (2254)
88" (2235)
83 1/4" (2115)

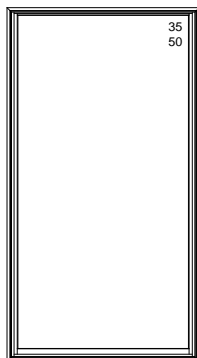


25CDHP4888



25CDHP4988

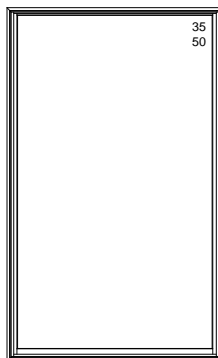

25CDHP5488

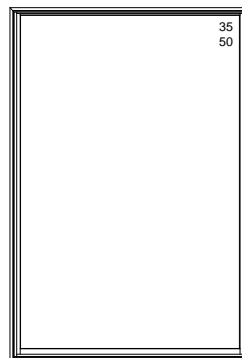

25CDHP6088

VALUES IN () ARE IN MILLIMETER CONVERSIONS.

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING



PICTURE UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

64 7/8" (1648)
65 3/8" (1661)
62 1/8" (1578)
61 3/8" (1559)
56 1/16" (1424)

69 1/2" (1765)
70" (1778)
66 3/4" (1695)
66" (1676)
60 11/16" (1541)

75 1/2" (1918)
76" (1930)
72 3/4" (1848)
72" (1829)
66 11/16" (1694)

15 1/16" (383)
16 9/16" (421)
12 3/4" (324)
12" (305)
7 1/4" (184)



25CDHP6112




25CDHP6612




25CDHP7212


21 1/16" (535)
22 9/16" (573)
18 3/4" (476)
18" (457)
13 1/4" (337)



25CDHP6118




25CDHP6618



25CDHP7218


27 1/16" (687)
28 9/16" (725)
24 3/4" (629)
24" (610)
19 1/4" (489)



25CDHP6124




25CDHP6624




25CDHP7224


33 1/16" (840)
34 9/16" (878)
30 3/4" (781)
30" (762)
25 1/4" (641)



25CDHP6130



25CDHP6630



25CDHP7230

39 1/16" (992)
40 9/16" (1030)
36 3/4" (933)
36" (914)
31 1/4" (794)



25CDHP6136



25CDHP6636



25CDHP7236

43 1/16" (1094)
44 9/16" (1132)
40 3/4" (1035)
40" (1016)
35 1/4" (895)



25CDHP6140



25CDHP6640



25CDHP7240

45 1/16" (1145)
46 9/16" (1183)
42 3/4" (1086)
42" (1067)
37 1/4" (946)



25CDHP6142




25CDHP6642



25CDHP7242


51 1/16" (1297)
52 9/16" (1335)
48 3/4" (1238)
48" (1219)
43 1/4" (1099)



25CDHP6148



25CDHP6648



25CDHP7248

VALUES IN () ARE IN MILLIMETER CONVERSIONS.

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING



PICTURE UNITS


MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

64 7/8" (1648)
65 3/8" (1661)
62 1/8" (1578)
61 3/8" (1559)
56 1/16" (1424)


69 1/2" (1765)
70" (1778)
66 3/4" (1695)
66" (1676)
60 11/16" (1541)

75 1/2" (1918)
76" (1930)
72 3/4" (1848)
72" (1829)
66 11/16" (1694)


57 1/16" (1449)
59 9/16" (1487)
54 3/4" (1391)
54" (1372)
49 1/4" (1251)



25CDHP6154




25CDHP6654




25CDHP7254


59 1/16" (1500)
60 9/16" (1538)
56 3/4" (1441)
56" (1422)
51 1/4" (1302)



25CDHP6156




25CDHP6656




25CDHP7256


63 1/16" (1602)
64 9/16" (1640)
62 3/4" (1594)
60" (1524)
55 1/4" (1403)



25CDHP6160




25CDHP6660




25CDHP7260


67 1/16" (1703)
68 9/16" (1741)
64 3/4" (1645)
64" (1626)
59 1/4" (1505)



25CDHP6164




25CDHP6664




25CDHP7264


71 1/16" (1805)
72 9/16" (1843)
68 3/4" (1746)
68" (1727)
63 1/4" (1607)



25CDHP6168



25CDHP6668



25CDHP7268

VALUES IN () ARE IN MILLIMETER CONVERSIONS.

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING



PICTURE UNITS


MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

64 7/8" (1648)
65 3/8" (1661)
62 1/8" (1578)
61 3/8" (1559)
56 1/16" (1424)


69 1/2" (1765)
70" (1778)
66 3/4" (1695)
66" (1676)
60 11/16" (1541)

75 1/2" (1918)
76" (1930)
72 3/4" (1848)
72" (1829)
66 11/16" (1694)


75 1/16" (1907)
76 9/16" (1945)
72 3/4" (1848)
72" (1829)
67 1/4" (1708)



25CDHP6172




25CDHP6672




25CDHP7272


79 1/16" (2008)
80 9/16" (2046)
76 3/4" (1949)
76" (1930)
71 1/4" (1810)



25CDHP6176




25CDHP6676




25CDHP7276


91 1/16" (2313)
92 9/16" (2351)
88 3/4" (2254)
88" (2235)
83 1/4" (2115)

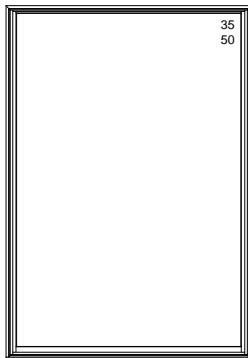

25CDHP6188



25CDHP6688

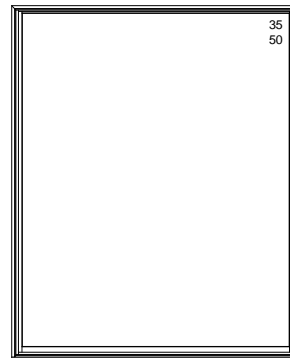


















25CDHP7288

VALUES IN () ARE IN MILLIMETER CONVERSIONS.

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING



HALF ROUND UNITS

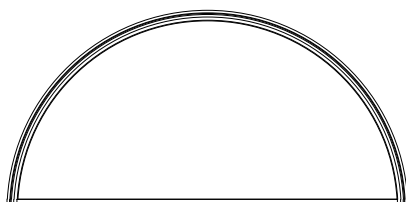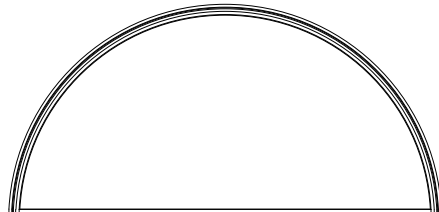MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	28 7/8" (733) 29 3/8" (746) 26 1/8" (664) 25 3/8" (645) 20 1/8" (511)	32 7/8" (835) 33 3/8" (848) 30 1/8" (765) 29 3/8" (746) 24 1/8" (613)	36 7/8" (937) 37 3/8" (949) 34 1/8" (867) 33 3/8" (848) 28 1/8" (714)	40 7/8" (1038) 41 3/8" (1051) 38 1/8" (968) 37 3/8" (949) 32 1/8" (816)	44 7/8" (1140) 45 3/8" (1153) 42 1/8" (1070) 41 3/8" (1051) 36 1/8" (918)
	<div>15 3/4" (400) 17 1/4" (438) 13 7/16" (341) 12 11/16" (322) 7 15/16" (202)</div> <div> 25CDHHR25</div>	<div>17 3/4" (451) 19 1/4" (489) 15 7/16" (392) 14 11/16" (373) 9 15/16" (252)</div> <div> 25CDHHR29</div>	<div>19 3/4" (502) 21 1/4" (540) 17 7/16" (443) 16 11/16" (424) 11 15/16" (303)</div> <div> 25CDHHR33</div>	<div>21 3/4" (552) 23 1/4" (591) 19 7/16" (494) 18 11/16" (475) 13 15/16" (354)</div> <div> 25CDHHR37</div>	<div>23 3/4" (603) 25 1/4" (641) 21 7/16" (545) 20 11/16" (525) 15 15/16" (405)</div> <div> 25CDHHR41</div>
MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	46 1/4" (1175) 46 3/4" (1187) 43 1/2" (1105) 42 3/4" (1086) 37 1/2" (953)	48 7/8" (1241) 49 3/8" (1254) 46 1/8" (1172) 45 3/8" (1153) 40 1/8" (1019)	52 7/8" (1343) 53 3/8" (1356) 50 1/8" (1273) 49 3/8" (1254) 44 1/8" (1121)	54 1/4" (1378) 54 3/4" (1391) 51 1/2" (1308) 50 3/4" (1289) 45 1/2" (1156)	
	<div>24 7/16" (621) 25 15/16" (659) 22 1/8" (562) 21 3/8" (543) 16 5/8" (422)</div> <div> 25CDHHR42</div>	<div>25 3/4" (654) 27 1/4" (692) 23 7/16" (595) 22 11/16" (576) 17 15/16" (455)</div> <div> 25CDHHR45</div>	<div>27 3/4" (705) 29 1/4" (743) 25 7/16" (646) 24 11/16" (627) 19 15/16" (506)</div> <div> 25CDHHR49</div>	<div>28 7/16" (722) 29 15/16" (760) 26 1/8" (664) 25 3/8" (645) 20 5/8" (524)</div> <div> 25CDHHR50</div>	
MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	56 7/8" (1445) 57 3/8" (1457) 54 1/8" (1375) 53 3/8" (1356) 48 1/8" (1222)	62 1/4" (1581) 62 3/4" (1594) 59 1/2" (1511) 58 3/4" (1492) 53 1/2" (1359)	64 7/8" (1648) 65 3/8" (1661) 62 1/8" (1578) 61 3/8" (1559) 56 1/8" (1426)		
	<div>29 3/4" (756) 31 1/4" (794) 27 7/16" (697) 26 11/16" (678) 21 15/16" (557)</div> <div> 25CDHHR53</div>	<div>32 7/16" (824) 33 15/16" (862) 30 1/8" (765) 29 3/8" (746) 24 5/8" (625)</div> <div> 25CDHHR58</div>	<div>33 3/4" (857) 35 1/4" (895) 31 7/16" (799) 30 11/16" (779) 25 15/16" (659)</div> <div> 25CDHHR61</div>		
MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	70 1/4" (1784) 70 3/4" (1797) 67 1/2" (1715) 66 3/4" (1695) 61 1/2" (1562)	76 7/8" (1953) 77 3/8" (1965) 74 1/8" (1883) 73 3/8" (1864) 68 1/8" (1730)	78 1/4" (1988) 78 3/4" (2000) 75 1/2" (1918) 74 3/4" (1899) 69 1/2" (1765)		
	<div>36 7/16" (926) 37 15/16" (964) 34 1/8" (867) 33 3/8" (848) 28 5/8" (727)</div> <div> 25CDHHR66</div>	<div>38 3/4" (1010) 41 1/4" (1048) 37 7/16" (951) 36 11/16" (932) 31 15/16" (811)</div> <div> 25CDHHR73</div>	<div>40 7/16" (1027) 41 15/16" (1065) 38 1/8" (969) 37 3/8" (949) 32 5/8" (829)</div> <div> 25CDHHR74</div>		
MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	103 5/8" (2632) 104 1/8" (2645) 100 7/8" (2562) 100 1/8" (2543) 94 7/8" (2410)	111 1/2" (2832) 112" (2845) 108 3/4" (2762) 108" (2743) 102 3/4" (2610)			
	<div>53 3/4" (1365) 55 1/4" (1403) 50 13/16" (1291) 50 1/16" (1272) 45 5/16" (1151)</div> <div> 25CDHHR100</div>	<div>57 1/16" (1449) 58 9/16" (1487) 54 3/4" (1391) 54" (1372) 49 1/4" (1251)</div> <div> 25CDHHR108</div>			


VALUES IN () ARE IN MILLIMETER CONVERSIONS.



QUARTER ROUND UNITS

MO BRICKMOLD	28 7/8" (733)	32 7/8" (835)	36 7/8" (937)	40 7/8" (1038)	44 7/8" (1140)
MO FLAT CASING	29 3/8" (746)	33 3/8" (848)	37 3/8" (949)	41 3/8" (1051)	45 3/8" (1153)
ROUGH OPENING	26 1/8" (664)	30 1/8" (765)	34 1/8" (867)	38 1/8" (969)	42 1/8" (1070)
FRAME SIZE	25 3/8" (645)	29 3/8" (746)	33 3/8" (848)	37 3/8" (949)	41 3/8" (1051)
DAYLIGHT OPENING	20 1/8" (511)	24 1/8" (613)	28 1/8" (714)	32 1/8" (816)	36 1/8" (918)


28 7/16" (722)
28 1/8" (714)
26 1/8" (664)
25 3/8" (645)
20 1/8" (511)



25CDHQR25


MO BRICKMOLD	48 7/8" (1241)
MO FLAT CASING	49 3/8" (1254)
ROUGH OPENING	46 1/8" (1172)
FRAME SIZE	45 3/8" (1153)
DAYLIGHT OPENING	40 1/8" (1019)

32 7/16" (824)
32 1/8" (816)
30 1/8" (765)
29 3/8" (746)
24 1/8" (613)




25CDHQR29

36 7/16" (926)
36 1/8" (916)
34 1/8" (867)
33 3/8" (848)
28 1/8" (714)



25CDHQR33


40 7/16" (1027)
40 1/8" (1019)
38 1/8" (969)
37 3/8" (949)
32 1/8" (816)



25CDHQR37


56 7/8" (1445)
57 3/8" (1457)
54 1/8" (1375)
53 3/8" (1356)
48 1/8" (1222)

44 7/16" (1129)
44 1/8" (1121)
42 1/8" (1070)
41 3/8" (1051)
36 1/8" (918)



25CDHQR41


48 7/16" (1220)
48 1/8" (1222)
46 1/8" (1172)
45 3/8" (1153)
40 1/8" (1019)



25CDHQR45


MO BRICKMOLD	64 7/8" (1648)
MO FLAT CASING	65 3/8" (1661)
ROUGH OPENING	62 1/8" (1578)
FRAME SIZE	61 3/8" (1559)
DAYLIGHT OPENING	56 1/8" (1426)

52 7/16" (1332)
52 1/8" (1324)
50 1/8" (1273)
49 3/8" (1254)
44 1/8" (1121)




25CDHQR49

56 7/16" (1434)
56 1/8" (1426)
54 1/8" (1375)
53 3/8" (1356)
48 1/8" (1222)



25CDHQR53

64 7/16" (1637)
64 1/8" (1629)
62 1/8" (1578)
61 3/8" (1559)
56 1/8" (1426)



25CDHQR61

VALUES IN () ARE IN MILLIMETER CONVERSIONS.



ELLIPSE UNITS

MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	40 7/8" (1038) 41 3/8" (1051) 38 1/8" (968) 37 3/8" (949) 32 1/8" (816)	44 7/8" (1140) 45 3/8" (1153) 42 1/8" (1070) 41 3/8" (1051) 36 1/8" (918)	48 7/8" (1241) 49 3/8" (1254) 46 1/8" (1172) 45 3/8" (1153) 40 1/8" (1019)	52 7/8" (1343) 53 3/8" (1356) 50 1/8" (1273) 49 3/8" (1254) 44 1/8" (1121)
	18 3/8" (467) 19 7/8" (505) 16 1/16" (408) 15 5/16" (389) 9 13/16" (249)	18 13/16" (478) 20 5/16" (516) 16 1/2" (419) 15 3/4" (400) 10 1/4" (260)	19 1/4" (489) 20 3/4" (527) 16 15/16" (430) 16 3/16" (411) 10 5/8" (270)	19 5/8" (498) 21 1/8" (537) 17 5/16" (440) 16 9/16" (421) 11 1/16" (281)
	25CDHEL37	25CDHEL41	25CDHEL45	25CDHEL49
MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	54 1/4" (1378) 54 3/4" (1391) 51 1/2" (1308) 50 3/4" (1289) 45 1/2" (1156)	56 7/8" (1445) 57 3/8" (1457) 54 1/8" (1375) 53 3/8" (1356) 48 1/8" (1222)	62 1/4" (1581) 62 3/4" (1594) 59 1/2" (1511) 58 3/4" (1492) 53 1/2" (1359)	
	19 13/16" (503) 21 5/16" (541) 17 1/2" (445) 16 3/4" (425) 11 3/16" (284)	20 1/16" (510) 21 9/16" (548) 17 3/4" (451) 17" (432) 11 7/16" (291)	20 5/8" (524) 22 1/8" (562) 18 5/16" (465) 17 9/16" (446) 12" (305)	
	25CDHEL50	25CDHEL53	25CDHEL58	
MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	64 7/8" (1648) 65 3/8" (1661) 62 1/8" (1578) 61 3/8" (1559) 56 1/8" (1426)	70 1/4" (1784) 70 3/4" (1797) 67 1/2" (1715) 66 3/4" (1695) 61 1/2" (1562)	76 7/8" (1953) 77 3/8" (1965) 74 1/8" (1883) 73 3/8" (1864) 68 1/8" (1730)	
	20 7/8" (530) 22 3/8" (568) 18 9/16" (471) 17 13/16" (452) 12 5/16" (313)	21 7/16" (545) 22 15/16" (583) 19 1/8" (486) 18 3/8" (467) 12 7/8" (327)	22 1/8" (562) 23 5/8" (600) 19 13/16" (503) 19 1/16" (484) 13 9/16" (344)	
	25CDHEL61	25CDHEL66	25CDHEL73	
MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	78 1/4" (1988) 78 3/4" (2000) 75 1/2" (1918) 74 3/4" (1899) 69 1/2" (1765)	86 1/4" (2191) 86 3/4" (2203) 83 1/2" (2121) 82 3/4" (2102) 77 7/16" (1967)		
	22 1/4" (565) 23 3/4" (603) 19 15/16" (506) 19 3/16" (487) 13 11/16" (348)	23 1/8" (587) 24 5/8" (625) 20 13/16" (529) 20 1/16" (510) 14 1/2" (368)		
	25CDHEL74	25CDHEL82		
MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	103 5/8" (2632) 104 1/8" (2645) 100 7/8" (2562) 100 1/8" (2543) 94 7/8" (2410)	115 5/8" (2937) 116 1/8" (2950) 112 7/8" (2867) 112 1/8" (2848) 106 13/16" (2713)		
	24 7/8" (632) 26 3/8" (670) 22 9/16" (573) 21 13/16" (554) 16 5/16" (414)	26 1/8" (664) 27 5/8" (702) 23 13/16" (605) 23 1/16" (586) 17 9/16" (446)		
	25CDHEL100	25CDHEL112		
MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	123 1/2" (3137) 124" (3150) 120 3/4" (3067) 120" (3048) 114 11/16" (2913)			
	26 15/16" (684) 28 7/16" (722) 24 5/8" (625) 23 7/8" (607) 18 3/8" (467)			
	25CDHEL120			

VALUES IN () ARE IN MILLIMETER CONVERSIONS.



SINGE TRANSOM UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

24 7/8" (632)
25 3/8" (645)
22 1/8" (562)
21 3/8" (543)
16" (406)

28 7/8" (733)
29 3/8" (746)
26 1/8" (664)
25 3/8" (645)
20" (508)

32 7/8" (835)
33 3/8" (848)
30 1/8" (765)
29 3/8" (746)
24" (610)

36 7/8" (937)
37 3/8" (949)
34 1/8" (867)
33 3/8" (848)
28" (711)


40 7/8" (1038)
41 3/8" (1051)
38 1/8" (968)
37 3/8" (949)
32" (813)

44 7/8" (1140)
45 3/8" (1153)
42 1/8" (1070)
41 3/8" (1051)
36" (914)


18 1/16" (459)
19 9/16" (497)
15 3/4" (406)
15 1/8" (381)
10 3/16" (268)



25CDHT2115



25CDHT2515



25CDHT2915



25CDHT3315



25CDHT3715




25CDHT4115


27 1/16" (687)
28 9/16" (725)
22 3/4" (625)
21 1/8" (531)
19 9/16" (497)




25CDHT2124



25CDHT2524



25CDHT2924



25CDHT3324



25CDHT3724











25CDHT4124

VALUES IN () ARE IN MILLIMETER CONVERSIONS.

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING



2-WIDE TRANSOM UNITS









MO BRICKMOLD	54 1/4" (1378)	62 1/4" (1581)	70 1/4" (1784)	78 1/4" (1988)			
MO FLAT CASING	54 3/4" (1391)	62 3/4" (1594)	70 3/4" (1797)	78 3/4" (2000)			
ROUGH OPENING	51 1/2" (1308)	59 1/2" (1511)	67 1/2" (1715)	75 1/2" (1918)			
FRAME SIZE	50 3/4" (1365)	58 3/4" (1492)	66 3/4" (1696)	74 3/4" (1899)			
DAYLIGHT OPENING	20 1/16" (510) [2]	24 1/16" (611) [2]	28 1/16" (713) [2]	32 1/16" (814) [2]			
<hr/>							
18 1/16" (459)							
19 9/16" (497)							
15 3/4" (400)							
15" (381)							
10 9/16" (288)							
<hr/>							
27 1/16" (687)							
28 9/16" (725)							
24 3/4" (629)							
24" (610)							
19 9/16" (497)							

VALUES IN () ARE IN MILLIMETER CONVERSIONS.

VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT











3-WIDE TRANSOM UNITS

MO BRICKMOLD	79 5/8" (2022)	91 5/8" (2327)	103 5/8" (2632)	115 5/8" (2937)
MO FLAT CASING	80 1/8" (2035)	92 1/8" (2340)	104 1/8" (2645)	116 1/8" (2950)
ROUGH OPENING	76 7/8" (1953)	88 7/8" (2257)	100 7/8" (2562)	112 7/8" (2867)
FRAME SIZE	76 1/8" (1934)	88 1/8" (2238)	100 1/8" (2543)	112 1/8" (2848)
DAYLIGHT OPENING	20 1/16" (510) [3]	24 1/16" (611) [3]	28 1/16" (713) [3]	32 1/16" (814) [3]
18 1/16" (459)				
19 9/16" (497)	25CDHT2515-3	25CDHT2915-3	25CDHT3315-3	25CDHT3715-3
15 3/4" (400)				
15" (381)				
10 9/16" (268)				
27 1/16" (687)				
28 9/16" (725)	25CDHT2524-3	25CDHT2924-3	25CDHT3324-3	25CDHT3724-3
24 3/4" (629)				
24" (610)				
19 9/16" (497)				

VALUES IN () ARE IN MILLIMETER CONVERSIONS.
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT



4-WIDE TRANSOM UNITS

MO BRICKMOLD	105" (2667)	121" (3073)	137" (3480)	153" (3886)
MO FLAT CASING	105 1/2" (2680)	121 1/2" (3086)	137 1/2" (3493)	153 1/2" (3899)
ROUGH OPENING	102 1/4" (2597)	118 1/4" (3004)	134 1/4" (3410)	150 1/4" (3816)
FRAME SIZE	101 1/2" (2578)	117 1/2" (2985)	133 1/2" (3391)	149 1/2" (3797)
DAYLIGHT OPENING	20 1/16" (510) [4]	24 1/16" (611) [4]	28 1/16" (713) [4]	32 1/16" (814) [4]
18 1/16" (459)				
19 9/16" (497)	25CDHT2515-4	25CDHT2915-4	25CDHT3315-4	25CDHT3715-4
15 3/4" (400)				
15" (381)				
10 9/16" (268)				
27 1/16" (687)				
28 9/16" (725)	25CDHT2524-4	25CDHT2924-4	25CDHT3324-4	25CDHT3724-4
24 3/4" (629)				
24" (610)				
19 9/16" (497)				

VALUES IN () ARE IN MILLIMETER CONVERSIONS.
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT



5-WIDE TRANSOM UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

130 3/8" (3312)
130 7/8" (3324)
127 3/8" (3235)
126 7/8" (3223)
20 1/16" (510) [5]

150 3/8" (3820)
150 7/8" (3832)
147 3/8" (3743)
146 7/8" (3731)
24 1/16" (611) [5]

170 3/8" (4328)
170 7/8" (4340)
167 3/8" (4251)
166 7/8" (4239)
28 1/16" (713) [5]

18 1/16" (459)
19 9/16" (497)
15 3/4" (400)
15" (381)
10 9/16" (268)



25CDHT2515-5




25CDHT2915-5



25CDHT3315-5

27 1/16" (687)
28 9/16" (725)
24 3/4" (629)
24" (610)
19 9/16" (497)



25CDHT2524-5



25CDHT2924-5



25CDHT3324-5

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

190 3/8" (4836)
190 7/8" (4848)
187 3/8" (4759)
186 7/8" (4747)
32 1/16" (814) [5]

18 1/16" (459)
19 9/16" (497)
15 3/4" (400)
15" (381)
10 9/16" (268)



25CDHT3715-5

27 1/16" (687)
28 9/16" (725)
24 3/4" (629)
24" (610)
19 9/16" (497)



25CDHT3724-5

VALUES IN () ARE IN MILLIMETER CONVERSIONS.
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT



OPERATOR WITH 15" TRANSOM

MO BRICKMOLD	28 7/8" (733)	32 7/8" (835)	36 7/8" (937)	42 7/8" (1089)
MO FLAT CASING	29 3/8" (746)	33 3/8" (848)	37 3/8" (949)	41 3/8" (1102)
ROUGH OPENING	26 1/8" (664)	30 1/8" (765)	34 1/8" (867)	38 1/8" (968)
FRAME SIZE	25 3/8" (645)	29 3/8" (746)	33 3/8" (848)	37 3/8" (949)
DAYLIGHT OPENING	20 1/16" (510)	24 1/16" (611)	28 1/16" (716)	32 1/16" (814)

54 1/16" (1373) 55 9/16" (1411) 51 3/4" (1314) 51" (1295) 14 11/16" (373) [2] 10 1/4" (260)				
58 1/16" (1475) 59 9/16" (1513) 55 3/4" (1416) 55" (1397) 16 11/16" (424) [2] 10 1/4" (260)				
66 1/16" (1678) 67 9/16" (1716) 63 3/4" (1619) 63" (1600) 20 11/16" (525) [2] 10 1/4" (260)				
70 1/16" (1780) 71 9/16" (1818) 67 3/4" (1721) 67" (1702) 22 11/16" (576) [2] 10 1/4" (260)				
74 1/16" (1881) 75 9/16" (1919) 71 3/4" (1822) 71" (1803) 24 11/16" (627) [2] 10 1/4" (260)				
78 1/16" (1983) 79 9/16" (2021) 75 3/4" (1924) 75" (1905) 26 11/16" (678) [2] 10 1/4" (260)				
82 1/16" (2084) 83 9/16" (2122) 79 3/4" (2026) 79" (2007) 27 11/16" (703) [2] 10 1/4" (260)				
86 1/16" (2186) 87 9/16" (2224) 83 3/4" (2127) 83" (2108) 30 11/16" (779) [2] 10 1/4" (260)				

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS


VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

E UNIT MEETS EGRESS REQUIREMENTS FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS.
CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
SEE NOTES ON SINGLE UNIT ELEVATIONS FOR SPECIFIC EGRESS CAPABILITY.



OPERATOR WITH 15" TRANSOM

MO BRICKMOLD	28 7/8" (733)	32 7/8" (835)	36 7/8" (937)	42 7/8" (1089)
MO FLAT CASING	29 3/8" (746)	33 3/8" (848)	37 3/8" (949)	41 3/8" (1102)
ROUGH OPENING	26 1/8" (664)	30 1/8" (765)	34 1/8" (867)	38 1/8" (968)
FRAME SIZE	25 3/8" (645)	29 3/8" (746)	33 3/8" (848)	37 3/8" (949)
DAYLIGHT OPENING	20 1/16" (510)	24 1/16" (611)	28 1/16" (716)	32 1/16" (814)

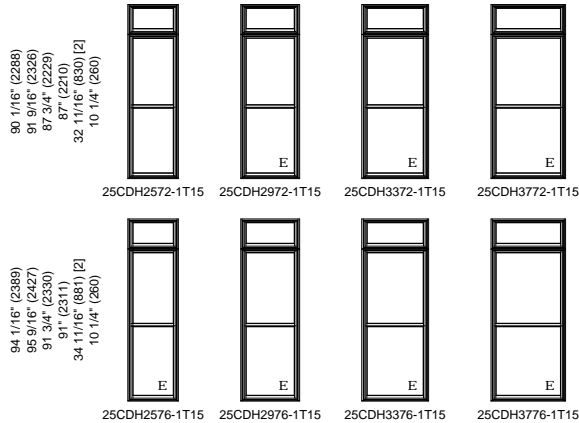

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS

VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

E: UNIT MEETS EGRESS REQUIREMENTS FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT. SEE NOTES ON SINGLE UNIT ELEVATIONS FOR SPECIFIC EGRESS CAPABILITY.



OPERATOR WITH 24" TRANSOM

MO BRICKMOLD	28 7/8" (733)	32 7/8" (835)	36 7/8" (937)	42 7/8" (1089)
MO FLAT CASING	29 3/8" (746)	33 3/8" (848)	37 3/8" (949)	41 3/8" (1102)
ROUGH OPENING	26 1/8" (664)	30 1/8" (765)	34 1/8" (867)	38 1/8" (968)
FRAME SIZE	25 3/8" (645)	29 3/8" (746)	33 3/8" (848)	37 3/8" (949)
DAYLIGHT OPENING	20 1/16" (510)	24 1/16" (611)	28 1/16" (716)	32 1/16" (814)

63 1/16" (1602) 64 9/16" (1640) 60 3/4" (1543) 60" (1524) 14 11/16" (373) [2] 19 1/4" (489)				
67 1/16" (1703) 68 9/16" (1741) 64 3/4" (1645) 64" (1626) 16 11/16" (428) [2] 19 1/4" (489)				
75 1/16" (1907) 76 9/16" (1945) 72 3/4" (1848) 72" (1829) 20 11/16" (529) [2] 19 1/4" (489)				
79 1/16" (2008) 80 9/16" (2046) 76 3/4" (1949) 76" (1930) 22 11/16" (576) [2] 19 1/4" (489)				
83 1/16" (2110) 84 9/16" (2148) 80 3/4" (2051) 80" (2032) 24 11/16" (627) [2] 19 1/4" (489)				
87 1/16" (2211) 88 9/16" (2249) 84 3/4" (2153) 84" (2134) 26 11/16" (676) [2] 19 1/4" (489)				
91 1/16" (2313) 92 9/16" (2351) 88 3/4" (2254) 88" (2235) 27 11/16" (703) [2] 19 1/4" (489)				

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS

VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

E UNIT MEETS EGRESS REQUIREMENTS FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS.


CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.

SEE NOTES ON SINGLE UNIT ELEVATIONS FOR SPECIFIC EGRESS CAPABILITY.



OPERATOR WITH 24" TRANSOM

MO BRICKMOLD	28 7/8" (733)	32 7/8" (835)	36 7/8" (937)	42 7/8" (1089)
MO FLAT CASING	29 3/8" (746)	33 3/8" (848)	37 3/8" (949)	41 3/8" (1102)
ROUGH OPENING	26 1/8" (664)	30 1/8" (765)	34 1/8" (867)	38 1/8" (968)
FRAME SIZE	25 3/8" (645)	29 3/8" (746)	33 3/8" (848)	37 3/8" (949)
DAYLIGHT OPENING	20 1/16" (510)	24 1/16" (611)	28 1/16" (716)	32 1/16" (814)

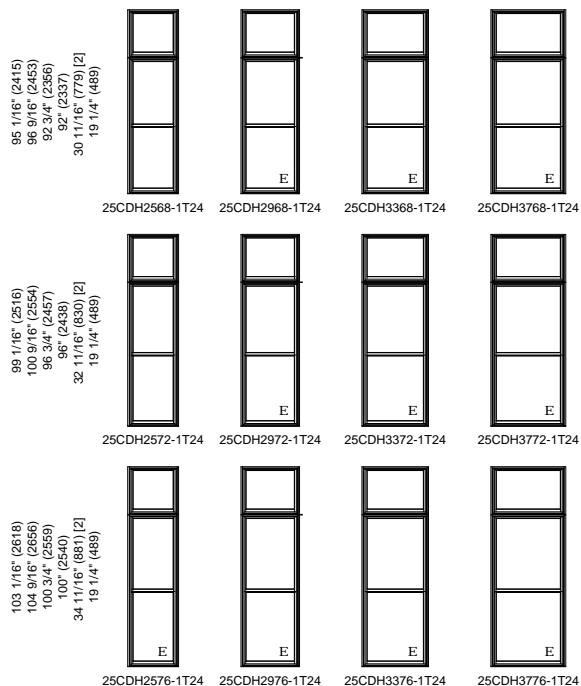

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS

VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

E UNIT MEETS EGRESS REQUIREMENTS FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS.

CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.

SEE NOTES ON SINGLE UNIT ELEVATIONS FOR SPECIFIC EGRESS CAPABILITY.



2-WIDE WITH 15" TRANSOM

MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	54 1/4" (1378) 53 3/4" (1391) 51 1/2" (1308) 50 3/4" (1289) 20 1/16" (510) [2]	62 1/4" (1581) 62 3/4" (1594) 59 1/2" (1511) 58 3/4" (1492) 24 1/16" (611) [2]	70 1/4" (1784) 70 3/4" (1797) 67 1/2" (1715) 66 3/4" (1695) 28 1/16" (716) [2]	78 1/4" (1988) 78 3/4" (2000) 75 1/2" (1918) 74 3/4" (1899) 32 1/16" (814) [2]
54 1/16" (1373) 55 0/16" (1411) 51 3/4" (1314) 51" (1295) 14 11/16" (373) [2] 10 1/4" (260)				
58 1/16" (1475) 58 9/16" (1513) 55 2/4" (1416) 55" (1397) 16 11/16" (424) [2] 10 1/4" (260)				
66 1/16" (1678) 67 9/16" (1716) 63 3/4" (1619) 63" (1600) 20 11/16" (525) [2] 10 1/4" (260)				
70 1/16" (1780) 71 9/16" (1818) 67 3/4" (1721) 67" (1702) 22 11/16" (576) [2] 10 1/4" (260)				
74 1/16" (1881) 75 9/16" (1919) 71 3/4" (1822) 71" (1803) 24 11/16" (627) [2] 10 1/4" (260)				
78 1/16" (1983) 79 9/16" (2021) 75 3/4" (1924) 75" (1905) 26 11/16" (678) [2] 10 1/4" (260)				
82 1/16" (2084) 83 9/16" (2122) 79 3/4" (2026) 79" (2007) 27 11/16" (703) [2] 10 1/4" (260)				
86 1/16" (2186) 87 9/16" (2224) 83 3/4" (2127) 83" (2108) 30 11/16" (779) [2] 10 1/4" (260)				

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS


VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

E UNIT MEETS EGRESS REQUIREMENTS FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS.
CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
SEE NOTES ON SINGLE UNIT ELEVATIONS FOR SPECIFIC EGRESS CAPABILITY.



2-WIDE WITH 15" TRANSOM

MO BRICKMOLD	54 1/4" (1378)	62 1/4" (1581)	70 1/4" (1784)	78 1/4" (1988)
MO FLAT CASING	53 3/4" (1391)	62 3/4" (1594)	70 3/4" (1797)	78 3/4" (2000)
ROUGH OPENING	51 1/2" (1308)	59 1/2" (1511)	67 1/2" (1715)	75 1/2" (1918)
FRAME SIZE	50 3/4" (1289)	58 3/4" (1492)	66 3/4" (1695)	74 3/4" (1899)
DAYLIGHT OPENING	20 1/16" (510) [2]	24 1/16" (611) [2]	28 1/16" (716) [2]	32 1/16" (814) [2]

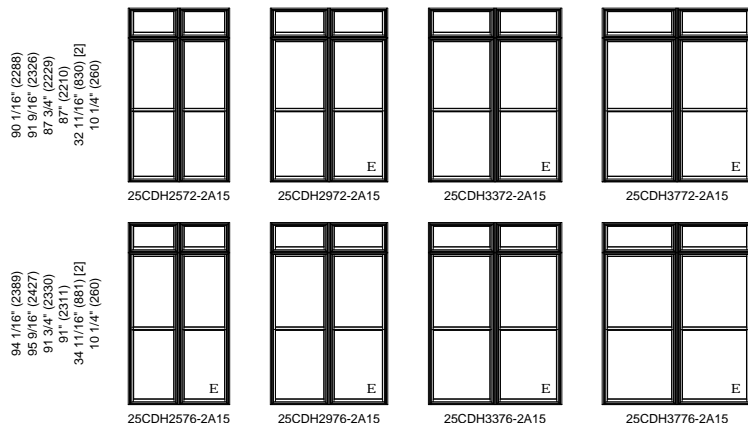

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS

VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT


E: UNIT MEETS EGRESS REQUIREMENTS FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT. SEE NOTES ON SINGLE UNIT ELEVATIONS FOR SPECIFIC EGRESS CAPABILITY.




2-WIDE WITH 24" TRANSOM

MO BRICKMOLD	54 1/4" (1378)	62 1/4" (1581)	70 1/4" (1784)	78 1/4" (1988)
MO FLAT CASING	53 3/4" (1391)	62 3/4" (1594)	70 3/4" (1797)	78 3/4" (2000)
ROUGH OPENING	51 1/2" (1308)	59 1/2" (1511)	67 1/2" (1715)	75 1/2" (1918)
FRAME SIZE	50 3/4" (1289)	58 3/4" (1492)	66 3/4" (1695)	74 3/4" (1899)
DAYLIGHT OPENING	20 1/16" (510) [2]	24 1/16" (611) [2]	28 1/16" (716) [2]	32 1/16" (814) [2]


63 1/16" (1602)
64 9/16" (1640)
60 3/4" (1543)
60" (1524)
14 11/16" (373) [2]
19 1/4" (489)




25CDH2536-2A24



25CDH2936-2A24



25CDH3336-2A24



25CDH3736-2A24

67 1/16" (1703)
68 9/16" (1741)
64 3/4" (1645)
64" (1626)
16 11/16" (423) [2]
19 1/4" (489)



25CDH2540-2A24



25CDH2940-2A24




25CDH3340-2A24




25CDH3740-2A24


75 1/16" (1907)
76 9/16" (1945)
72 3/4" (1848)
72" (1829)
20 11/16" (525) [2]
19 1/4" (489)




25CDH2548-2A24



25CDH2948-2A24




25CDH3348-2A24




25CDH3748-2A24


79 1/16" (2008)
80 9/16" (2046)
76 3/4" (1949)
76" (1930)
22 11/16" (576) [2]
19 1/4" (489)




25CDH2552-2A24



25CDH2952-2A24




25CDH3352-2A24




25CDH3752-2A24


83 1/16" (2110)
84 9/16" (2148)
80 3/4" (2051)
80" (2032)
24 11/16" (627) [2]
19 1/4" (489)




25CDH2556-2A24



25CDH2956-2A24




25CDH3356-2A24




25CDH3756-2A24


87 1/16" (2211)
88 9/16" (2249)
84 3/4" (2153)
84" (2134)
26 11/16" (678) [2]
19 1/4" (489)




25CDH2560-2A24



25CDH2960-2A24




25CDH3360-2A24




25CDH3760-2A24


91 1/16" (2313)
92 9/16" (2351)
88 3/4" (2254)
88" (2235)
27 11/16" (703) [2]
19 1/4" (489)




25CDH2564-2A24



25CDH2964-2A24



25CDH3364-2A24



25CDH3764-2A24

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS

VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

E UNIT MEETS EGRESS REQUIREMENTS FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS.













CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.

SEE NOTES ON SINGLE UNIT ELEVATIONS FOR SPECIFIC EGRESS CAPABILITY.



2-WIDE WITH 24" TRANSOM

MO BRICKMOLD	54 1/4" (1378)	62 1/4" (1581)	70 1/4" (1784)	78 1/4" (1988)
MO FLAT CASING	53 3/4" (1391)	62 3/4" (1594)	70 3/4" (1797)	78 3/4" (2000)
ROUGH OPENING	51 1/2" (1308)	59 1/2" (1511)	67 1/2" (1715)	75 1/2" (1918)
FRAME SIZE	50 3/4" (1289)	58 3/4" (1492)	66 3/4" (1695)	74 3/4" (1899)
DAYLIGHT OPENING	20 1/16" (510) [2]	24 1/16" (611) [2]	28 1/16" (716) [2]	32 1/16" (814) [2]

95 1/16" (2415) 96 9/16" (2453) 92 3/4" (2366) 92 (2337) 30 11/16" (779) [2] 19 1/4" (489)	 25CDH2568-2A24	 25CDH2968-2A24	 25CDH3368-2A24	 25CDH3768-2A24
99 1/16" (2516) 100 9/16" (2554) 96 3/4" (2457) 96 (2430) 32 11/16" (830) [2] 19 1/4" (489)	 25CDH2572-2A24	 25CDH2972-2A24	 25CDH3372-2A24	 25CDH3772-2A24
103 1/16" (2618) 104 9/16" (2656) 100 3/4" (2559) 100 (2540) 34 11/16" (881) [2] 19 1/4" (489)	 25CDH2576-2A24	 25CDH2976-2A24	 25CDH3376-2A24	 25CDH3776-2A24

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS.

VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT.

E: UNIT MEETS EGRESS REQUIREMENTS FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS.

CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.

SEE NOTES ON SINGLE UNIT ELEVATIONS FOR SPECIFIC EGRESS CAPABILITY.



3-WIDE WITH 15" TRANSOM

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


79 5/8" (2022)
80 1/8" (2035)
76 7/8" (1953)
76 1/8" (1934)
20 1/16" (510) [3]

91 5/8" (2327)
92 1/8" (2340)
88 7/8" (2257)
88 1/8" (2238)
24 1/16" (611) [3]


103 5/8" (2632)
104 1/8" (2645)
100 7/8" (2562)
100 1/8" (2543)
28 1/16" (716) [3]

115 5/8" (2937)
116 1/8" (2950)
112 7/8" (2867)
112 1/8" (2848)
32 1/16" (814) [3]


54 1/16" (1373)
55 9/16" (1411)
51 3/4" (1314)
51" (1295)
14 11/16" (373) [2]
10 1/4" (260)




25CDH2536-3A15



25CDH2936-3A15




25CDH3336-3A15



25CDH3736-3A15


58 1/16" (1475)
59 9/16" (1513)
55 3/4" (1416)
55" (1397)
16 11/16" (424) [2]
10 1/4" (260)



25CDH2540-3A15



25CDH2940-3A15




25CDH3340-3A15




25CDH3740-3A15


66 1/16" (1678)
67 9/16" (1716)
63 3/4" (1619)
63" (1600)
20 11/16" (525) [2]
10 1/4" (260)




25CDH2548-3A15



25CDH2948-3A15




25CDH3348-3A15




25CDH3748-3A15


70 1/16" (1760)
71 9/16" (1815)
67 3/4" (1721)
67" (1702)
22 11/16" (576) [2]
10 1/4" (260)




25CDH2552-3A15



25CDH2952-3A15



25CDH3352-3A15



25CDH3752-3A15

74 1/16" (1881)
75 9/16" (1919)
71 3/4" (1825)
71" (1803)
24 11/16" (627) [2]
10 1/4" (260)



25CDH2556-3A15



25CDH2956-3A15




25CDH3356-3A15



25CDH3756-3A15

78 1/16" (1953)
79 9/16" (2021)
75 3/4" (1924)
75" (1905)
26 11/16" (678) [2]
10 1/4" (260)



25CDH2560-3A15



25CDH2960-3A15




25CDH3360-3A15



25CDH3760-3A15


82 1/16" (2094)
83 9/16" (2122)
79 3/4" (2026)
79" (2007)
27 11/16" (703) [2]
10 1/4" (260)




25CDH2564-3A15



25CDH2964-3A15




25CDH3364-3A15




25CDH3764-3A15


86 1/16" (2186)
87 9/16" (2224)
83 3/4" (2127)
83" (2108)
30 11/16" (779) [2]
10 1/4" (260)




25CDH2568-3A15



25CDH2968-3A15



25CDH3368-3A15



25CDH3768-3A15

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS

VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

E UNIT MEETS EGRESS REQUIREMENTS FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS.

CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.


SEE NOTES ON SINGLE UNIT ELEVATIONS FOR SPECIFIC EGRESS CAPABILITY.




3-WIDE WITH 15" TRANSOM

MO BRICKMOLD	79 5/8" (2022)	91 5/8" (2327)	103 5/8" (2632)	115 5/8" (2937)
MO FLAT CASING	80 1/8" (2035)	92 1/8" (2340)	104 1/8" (2645)	116 1/8" (2950)
ROUGH OPENING	76 7/8" (1953)	88 7/8" (2257)	100 7/8" (2562)	112 7/8" (2867)
FRAME SIZE	76 1/8" (1934)	88 1/8" (2238)	100 1/8" (2543)	112 1/8" (2848)
DAYLIGHT OPENING	20 1/16" (510) [3]	24 1/16" (611) [3]	28 1/16" (716) [3]	32 1/16" (814) [3]


90 1/16" (2288)
91 9/16" (2326)
87 3/4" (2229)
87 (2210)
32 1/16" (810) [2]
10 1/4" (260)




25CDH2572-3A15



25CDH2972-3A15




25CDH3372-3A15




25CDH3772-3A15


94 1/16" (2388)
95 9/16" (2427)
91 3/4" (2330)
91 (2311)
34 1/16" (861) [2]
10 1/4" (260)




25CDH2576-3A15



25CDH2976-3A15



25CDH3376-3A15



25CDH3776-3A15

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS

VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

E UNIT MEETS EGRESS REQUIREMENTS FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS.
CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
SEE NOTES ON SINGLE UNIT ELEVATIONS FOR SPECIFIC EGRESS CAPABILITY.



3-WIDE WITH 24" TRANSOM

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


79 5/8" (2022)
80 1/8" (2035)
76 7/8" (1953)
76 1/8" (1934)
20 1/16" (510) [3]

91 5/8" (2327)
92 1/8" (2340)
88 7/8" (2257)
88 1/8" (2238)
24 1/16" (611) [3]


103 5/8" (2632)
104 1/8" (2645)
100 7/8" (2562)
100 1/8" (2543)
28 1/16" (716) [3]

115 5/8" (2937)
116 1/8" (2950)
112 7/8" (2867)
112 1/8" (2848)
32 1/16" (814) [3]


63 1/16" (1602)
64 9/16" (1640)
60 3/4" (1524)
60" (1524)
14 11/16" (373) [2]
19 1/4" (489)



25CDH2536-3A24



25CDH2936-3A24



25CDH3336-3A24



25CDH3736-3A24


67 1/16" (1703)
68 9/16" (1741)
64 3/4" (1645)
64" (1626)
16 11/16" (424) [2]
19 1/4" (489)



25CDH2540-3A24



25CDH2940-3A24




25CDH3340-3A24




25CDH3740-3A24


75 1/16" (1907)
76 9/16" (1945)
72 3/4" (1848)
72" (1829)
20 11/16" (525) [2]
19 1/4" (489)




25CDH2548-3A24



25CDH2948-3A24




25CDH3348-3A24




25CDH3748-3A24


79 1/16" (2008)
80 9/16" (2046)
76 3/4" (1949)
76" (1930)
22 11/16" (576) [2]
19 1/4" (489)



25CDH2552-3A24



25CDH2952-3A24




25CDH3352-3A24




25CDH3752-3A24


83 1/16" (2110)
84 9/16" (2148)
80 3/4" (2051)
80" (2032)
24 11/16" (627) [2]
19 1/4" (489)



25CDH2556-3A24



25CDH2956-3A24




25CDH3356-3A24




25CDH3756-3A24


87 1/16" (2211)
88 9/16" (2249)
84 3/4" (2153)
84" (2134)
26 11/16" (678) [2]
19 1/4" (489)




25CDH2560-3A24



25CDH2960-3A24




25CDH3360-3A24




25CDH3760-3A24


91 1/16" (2313)
92 9/16" (2351)
88 3/4" (2254)
88" (2235)
27 11/16" (703) [2]
19 1/4" (489)




25CDH2564-3A24



25CDH2964-3A24



25CDH3364-3A24



25CDH3764-3A24

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS

VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

E UNIT MEETS EGRESS REQUIREMENTS FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS.

CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.

SEE NOTES ON SINGLE UNIT ELEVATIONS FOR SPECIFIC EGRESS CAPABILITY.



3-WIDE WITH 24" TRANSOM

MO BRICKMOLD	79 5/8" (2022)	91 5/8" (2327)	103 5/8" (2632)	115 5/8" (2937)
MO FLAT CASING	80 1/8" (2035)	92 1/8" (2340)	104 1/8" (2645)	116 1/8" (2950)
ROUGH OPENING	76 7/8" (1953)	88 7/8" (2257)	100 7/8" (2562)	112 7/8" (2867)
FRAME SIZE	76 1/8" (1934)	88 1/8" (2238)	100 1/8" (2543)	112 1/8" (2848)
DAYLIGHT OPENING	20 1/16" (510) [3]	24 1/16" (611) [3]	28 1/16" (716) [3]	32 1/16" (814) [3]

95 1/16" (2415) 96 9/16" (2453) 92 3/4" (2356) 92" (2337) 30 11/16" (779) [2] 19 1/4" (489)				
	25CDH2568-3A24	25CDH2968-3A24	25CDH3368-3A24	25CDH3768-3A24
99 1/16" (2516) 100 9/16" (2554) 96 3/4" (2457) 96" (2438) 32 11/16" (830) [2] 19 1/4" (489)				
	25CDH2572-3A24	25CDH2972-3A24	25CDH3372-3A24	25CDH3772-3A24
103 1/16" (2618) 104 9/16" (2656) 100 3/4" (2559) 100" (2540) 34 11/16" (881) [2] 19 1/4" (489)				
	25CDH2576-3A24	25CDH2976-3A24	25CDH3376-3A24	25CDH3776-3A24

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS

VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

E UNIT MEETS EGRESS REQUIREMENTS FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS.

CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.

SEE NOTES ON SINGLE UNIT ELEVATIONS FOR SPECIFIC EGRESS CAPABILITY.