


E


- PERFORATED GALV. GUTTER GUARD
- SEAMLESS CONCEALED SHEET METAL GUTTER - (COLOR: GALVANIZED)
- CONT. COR-A-VENT SV-5 SIDING VENT (3/4" X 3")
- 0' - 0 3/4" VENT GAP
- EXTEND UV STABLE (WRVPAB) OVER ROOF SHEATHING - UNDER ROOF FELT
- 1/2" DEEP GALV. HORTZ. HAT CHANNEL @ XX O.C.
- EXPANDING POLYURETHANE FOAM
- EXISTING 2X WOOD STUDS OR NEW TO MATCH (BATT INSUL)

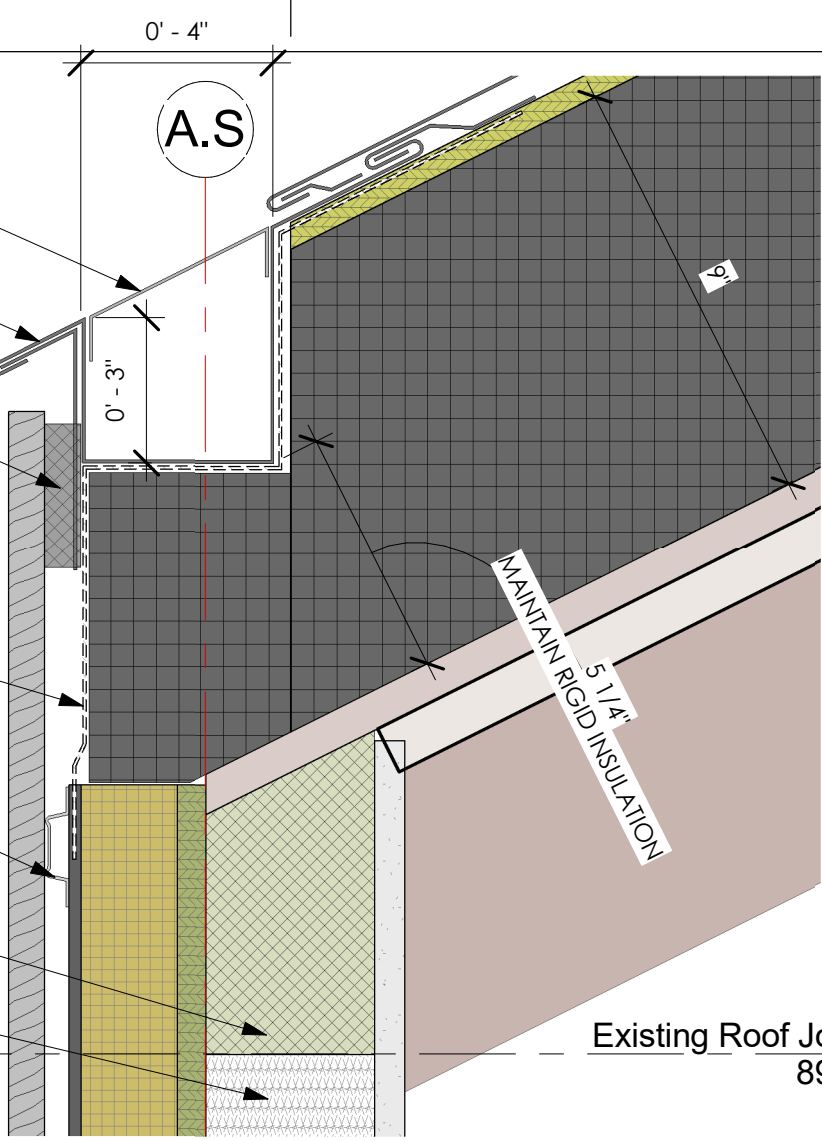

6E (A-1.5-ROOF) - SECTION LOOKING NORTH  
3" = 1'-0"

D


- 1/2" DEEP GALV. HORTZ. HAT CHANNEL @ XX O.C.
- CONT. COR-A-VENT SV-5 SIDING VENT (3/4" X 3")
- TREATED WOOD BLOCKING - SIZE AS NECESSARY
- GALV. BRAKE METAL - (COLOR: DARK BRONZE)
- 1' - 6"
- 1 1/4 GALV. TUBE STEEL W/ BRACKET (GALV. AFTER FABRICATION)
- TREATED BLOCKING AS NECESSARY
- 1/8" CORTEN PLATE STEEL ENCLOSURE
- 0' - 1 1/4"
- 1/4"

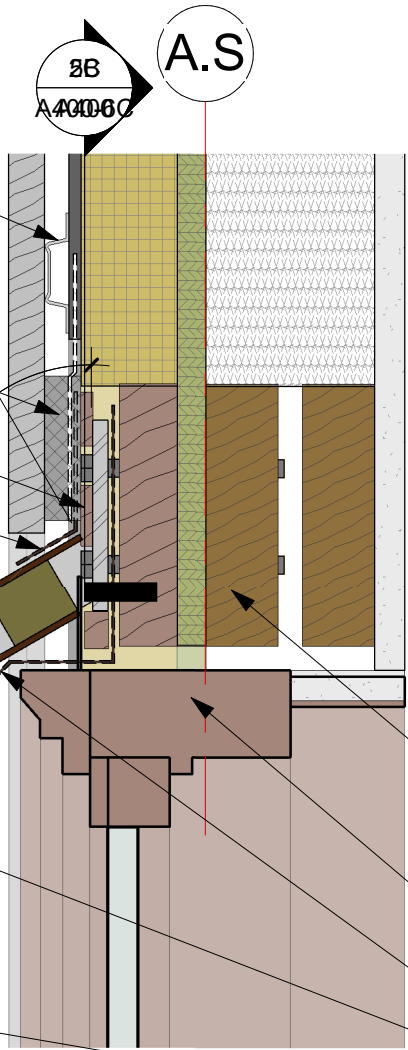

6C (A-1.5-HEAD) - SECTION LOOKING NORTH  
3" = 1'-0"

C


- DOUBLE HUNG WINDOW
- WRAP (WRVPAB) MEMBRANE AT ALL JAMBS/HEADS/SILLS
- GALV. BRAKE METAL - (COLOR: DARK BRONZE)
- CONT. COR-A-VENT SV-5 SIDING VENT (3/4" X 3")
- 1/2" DEEP GALV. HORTZ. HAT CHANNEL @ XX O.C.
- INTERMITTENT EPDM SHIMS UNDER HORTZ. HAT CHANNEL @ XX O.C.

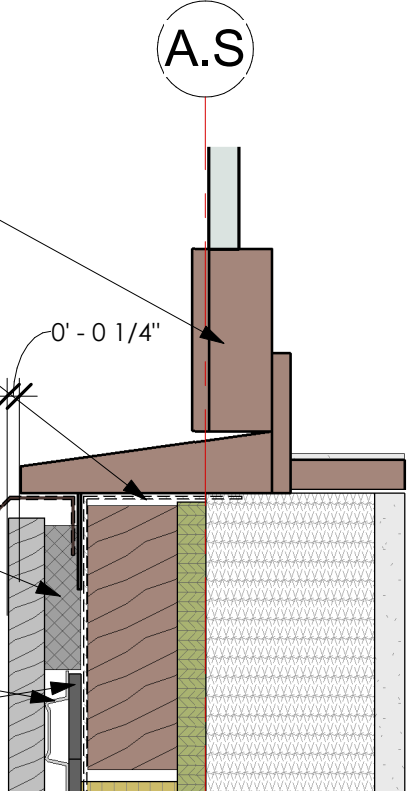

6B (A-1.5-WINDOW SILL) - SECTION LOOKING NORTH  
3" = 1'-0"

B


- INTERMITTENT EPDM SHIMS UNDER HORTZ. HAT CHANNEL @ XX O.C.
- VERT. (1X4 & 1X6) T&G WOOD SIDING (THERMORY P20 PROFILE) - BLIND SCREW AT T&G
- 1/2" DEEP GALV. HORTZ. HAT CHANNEL @ XX O.C.
- CONT. COR-A-VENT SV-5 SIDING VENT (3/4" X 3")
- 1/2" GAP
- GALV. BRAKE METAL - (COLOR: GALV.)
- GALVANIZED STEEL CHANNEL (C3X3.5)
- 1/2" GAP
- CONT. COR-A-VENT SV-5 SIDING VENT (3/4" X 3")
- VERT. (1X4 & 1X6) T&G WOOD SIDING (THERMORY P20 PROFILE) - BLIND SCREW AT T&G

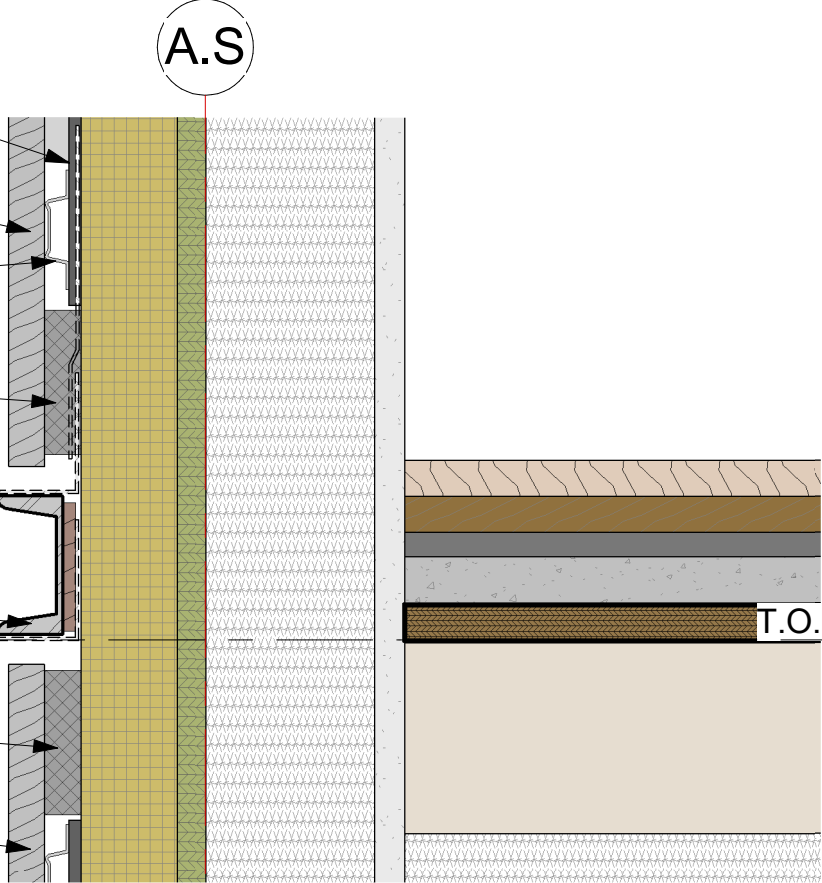

6AA (A-1.5-2ND) - SECTION LOOKING NORTH  
3" = 1'-0"

A

- EXTERIOR SHEATHING (PLYWOOD OR EXISTING)
- INTERMITTENT EPDM SHIMS UNDER HORTZ. HAT CHANNEL @ XX O.C.
- 1/2" DEEP GALV. HORTZ. HAT CHANNEL @ XX O.C.
- VERT. (1X4 & 1X6) T&G WOOD SIDING (THERMORY P20 PROFILE) - BLIND SCREW AT T&G
- CONT. COR-A-VENT SV-5 SIDING VENT (3/4" X 3")
- UV STABLE WATER RESISTANT VAPOR PERMEABLE AIR BARRIER(WRVPAB) OVER 2" CONT. XPS RIGID INSULATION (25 PSI)
- EXISTING CONCRETE FOUNDATION

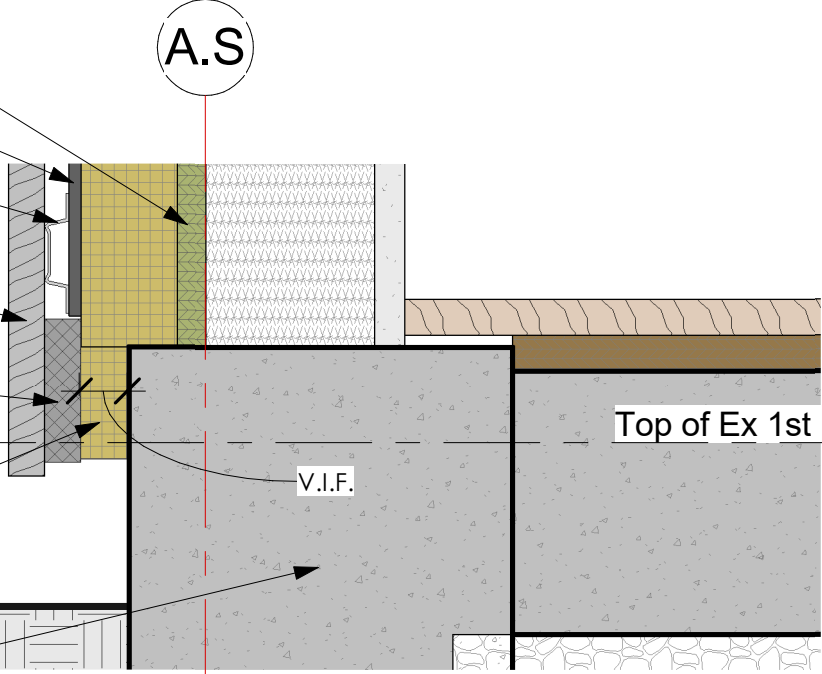

6A (A-1.5-1ST) - SECTION LOOKING NORTH  
3" = 1'-0"