



Male

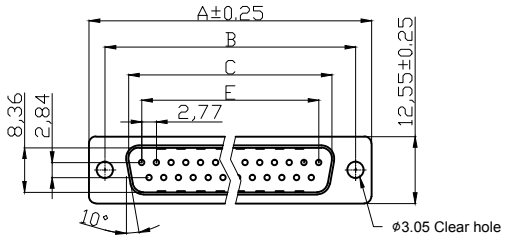







Recommended PCB Layout

NOTES:

MATERIAL
1.Insulator Material:Glass-filled thermoplastic PBT,UL94V-0, Black
2.Contact Material: Copper Alloy
3.Shell :Steel, 100 µ" Tin Over 50µ" min Copper
4.Clinch Nut :Brass,Nickel Plated
5.Contact plating : Gold flash full gold

ELECTRICAL
1.Current Rating : 3AMP
2.Voltage Rating : 250V AC/rms 60Hz
3.Contact Resistance: 20mΩ
4.Insulation Resistance: 1000MΩ min at 500 VDC
5.Withstand Voltage: 1000V AC/rms 60Hz for 1 minute

ENVIRONMENTAL
① 1.Temperature Range:-55°C~+105°C

UL No. E198287


Order Code:


A-Dx xx PP/Z-BK


Contact style:
F - Female
S - Male


No. of Contacts
09 / 15 / 25 / 37/ 50

Standard: Quality class III

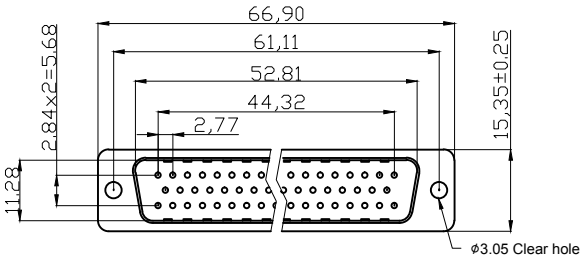

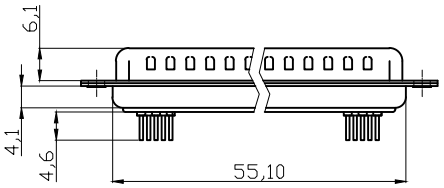





Recommended PCB Layout

50 Positions

Dimensions

Positions	A	B	C	E	F
09	30.81	24.99	16.92	11.08	19.20
15	39.20	33.30	25.25	19.39	27.70
25	53.04	47.04	38.96	33.24	41.10
37	69.40	63.50	55.42	49.86	57.30

RoHS compliant

Unit:mm

Scale	Free
TOLERANCE	
X.	±0.38
X.X	±0.25
X.XX	±0.13
DIM	TOL
X.°	±3°
X.X°	±1.0°
Angle	TOL

Id.	Modification	Date	Name
①	Update temperature range	04.06.2019	Xavier
⓪	Drawn	18.10.2018	Xavier

	Date	Name
Drawn	18.10.2018	Xavier
Approved	18.10.2018	Winnie

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
A-DX XX PP/Z-BK

Drawing-No.
ASS 8237 CO


rev01


Replace


Sheet
1/2

CON1370


Female

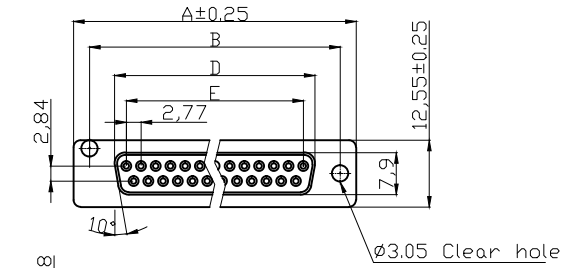

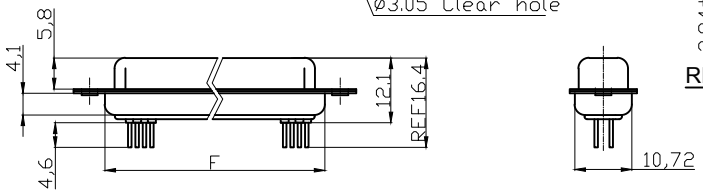


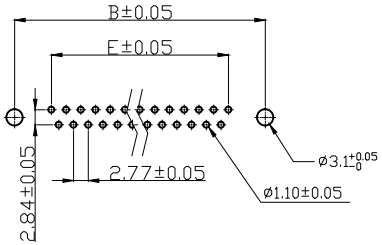

RECOMMENDED PCB LAYOUT

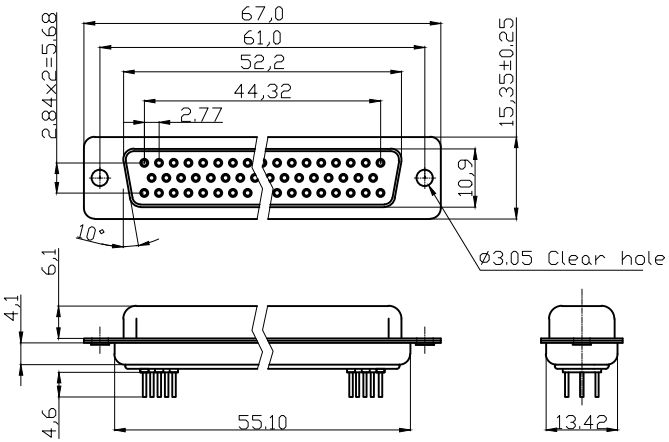

50 POSITIONS

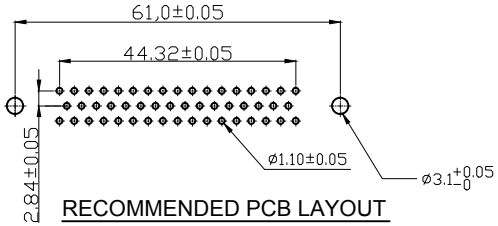

RECOMMENDED PCB LAYOUT

NOTES:

MATERIAL
1.Insulator Material:Glass-filled thermoplastic PBT,UL94V-0, Black
2.Contact Material: Copper Alloy
3.Shell :Steel, 100 µ" Tin Over 50µ" min Copper
4.Clinch Nut :Brass,Nickel Plated
5.Contact plating : Gold flash full gold

ELECTRICAL
1.Current Rating : 3AMP
2.Voltage Rating : 250V AC/rms 60Hz
3.Contact Resistance: 20mΩ
4.Insulation Resistance: 1000MΩ min at 500 VDC
5.Withstand Voltage: 1000V AC/rms 60Hz for 1 minute

ENVIRONMENTAL
① 1.Temperature Range:-55°C~+105°C

UL No. E198287

Dimensions

Positions	A±0.25	B±0.10	D±0.13	E±0.08	F±0.10
09	30.81	24.99	16.33	11.08	19.20
15	39.20	33.30	24.70	19.39	27.70
25	53.05	47.04	38.40	33.24	41.10
37	69.40	63.50	54.80	49.86	57.30

RoHS compliant
Unit:mm

Scale	Free
TOLERANCE	
X.	±0.38
X.X	±0.25
X.XX	±0.13
DIM	TOL
X.°	±3°
X.X°	±1.0°
Angle	TOL

Id.	Modification	Date	Name
①	Update temperature range	04.06.2019	Xavier
⓪	Drawn	18.10.2018	Xavier

	Date	Name
Drawn	18.10.2018	Xavier
Approved	18.10.2018	Winnie

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
A-DX XX PP/Z-BK

Drawing-No.
ASS 8237 CO

rev01

Replace

Sheet 2/2

CON1370