



- add extra internal pins to breakout
- switch between external and USB power?
- implement usb host connector?
- prioritize between this and another DMX in?
- battery?



DMX512 specifies that the master controller is the only nonisolated transceiver and provides the single-ground reference for the entire bus.

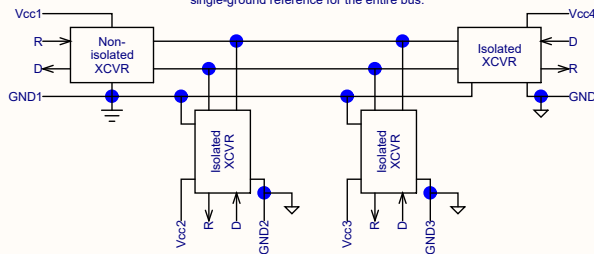

	RJ-45	XLR3	XLR5	Function
1	Org/Wht	3	3	Data1+
2	Org	2	2	Data1-
3	Grn/Wht		5	Data2+
4	Blu			nc
5	Blu/Wht			nc
6	Grn		4	Data2-
7	Brn/Wht	1	1	Data1_COM
8	Brn	1	1	Data2_COM

VOLT  VISION	VoV1366 HarryDMXsliders	
Rev: v0.8	Top Level Design	Sheet 1 of 1
2016-11-17	VoltVisionFrenchy	[No Variations]

Release