


Power input 9 to 32 V and 5 V buck converter

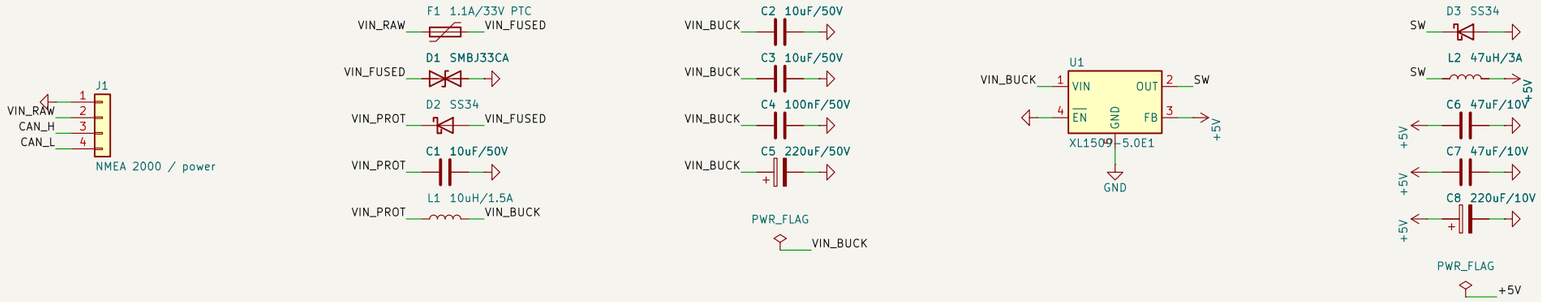


I2S audio amplifier

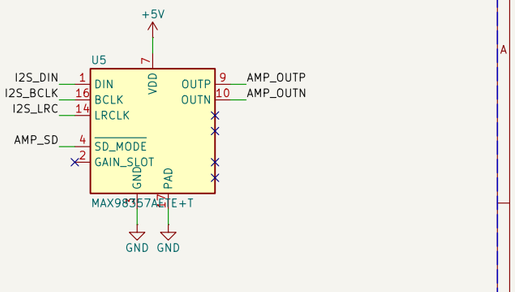


USB (native ESP32-S3 USB, bench power)

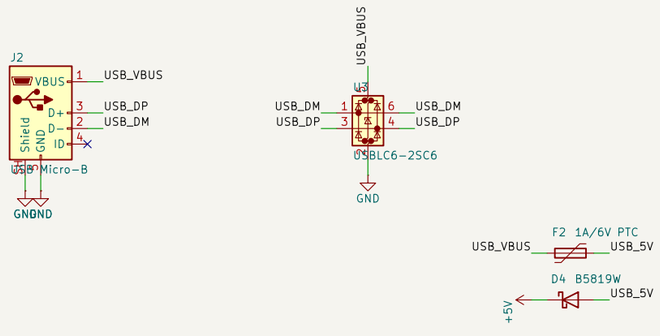


3.3 V regulator and status LEDs

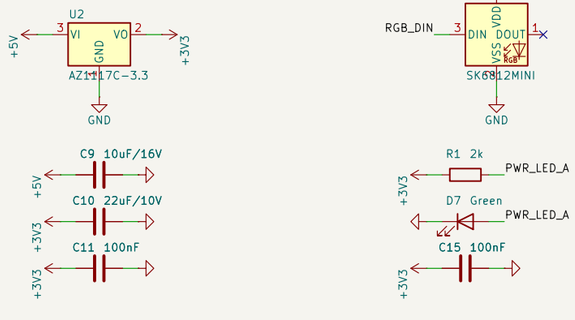


ESP32-S3-WROOM-1-N16R8

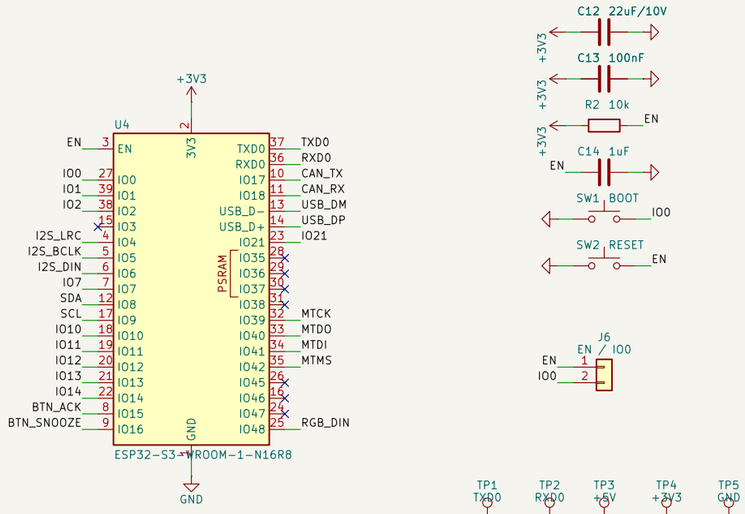


GAIN open: 9 dB. SD_MODE through 1M: (L+R)/2.
No CAN termination: the backbone is terminated.
IO35, IO36, IO37 are used by the octal PSRAM.
IO0, IO3, IO45, IO46 are strapping pins.




GPIO header




Display socket

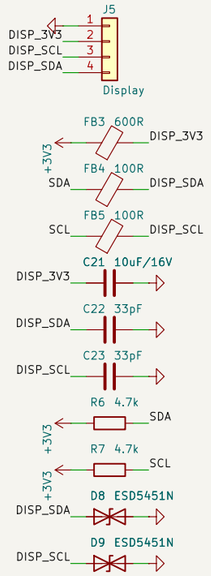

NMEA 2000 transceiver

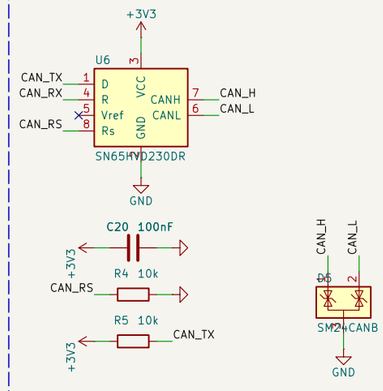

Button inputs

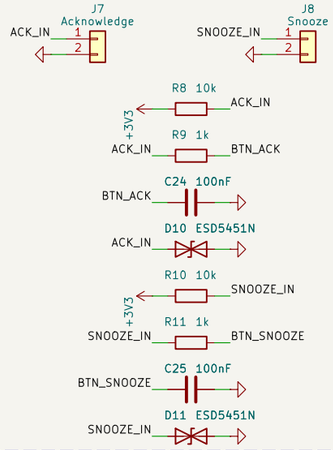

Form factor, GPIO and display headers after Hat Labs HALMET (CC BY 4.0)
Spoken alarm annunciator for Signal K and NMEA 2000
OpenFairWind

Sheet: /
File: outlook_guardian.kicad_sch

Title: Outlook Guardian

Size: A3	Date: 2026-10-11	**Rev: 0.1**
KiCad E.D.A. 10.0.6		Id: 1/1