

# **PeaPod - Solution Overview**

Outlining a Proposal to the PeaPod Requirements

Jayden Lefebvre - Lead Engineer  
jayden.lefebvre@mail.utoronto.ca

Nathan Chareunsouk, Navin Vanderwert, Jonas Marshall - Design Engineers

Revision 0.3  
University of Toronto Agritech  
July 3rd, 2021

# Contents

<b>1</b>	<b>Introduction</b>	<b>2</b>
1.1	Purpose . . . . .	2
<b>2</b>	<b>Design</b>	<b>3</b>
2.1	Automation . . . . .	4
2.2	Housing . . . . .	5
2.3	Aeroponics . . . . .	7
2.4	Environment Control . . . . .	7
2.4.1	Air Temperature . . . . .	7
2.4.2	Air Humidification . . . . .	8
2.4.3	Air Dehumidification . . . . .	8
2.4.4	Solution Temperature . . . . .	8
2.4.5	Solution Nutrients . . . . .	8
2.4.6	Solution pH . . . . .	8
2.4.7	Lighting . . . . .	9
2.5	Optimization . . . . .	9

# 1 Introduction

## 1.1 Purpose

The purpose of this document is to outline the function and features of a design proposed to meet the PeaPod Requirements.

It accomplishes this by addressing the following prompts on a recursive tree basis:

1. **What** is the design's purpose and function?
2. **How** does it accomplish this? What is the method/process?
3. Justification on how the selected features meet the method better than alternatives.

## 2 Design

The purpose of the design is derived from the opportunity statement:

PeaPod is "an automated and isolated aeroponic crop growth system, able to generate any growth environment from a combination of independent environment parameters, with both environment and crop growth data collection for optimization".

The primary function of the overall design are derived from both the overall purpose as well as the system inputs and outputs as defined by the DSFC Applicant Guide [1].

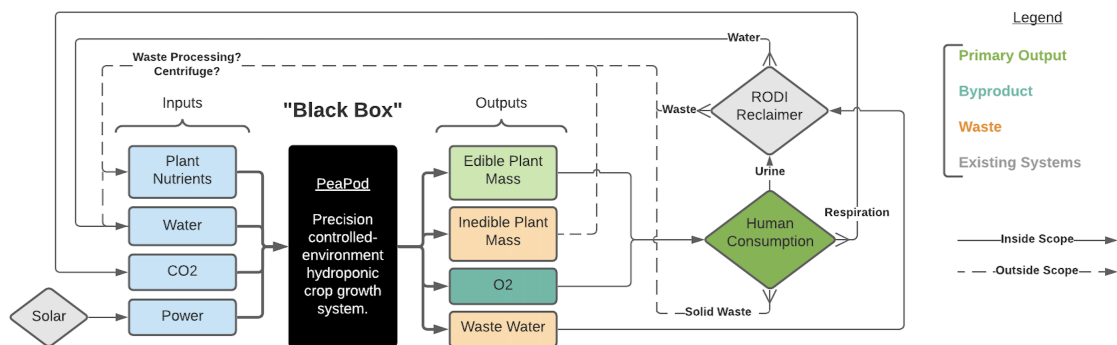


Figure 1: "Black box" function diagram of PeaPod.

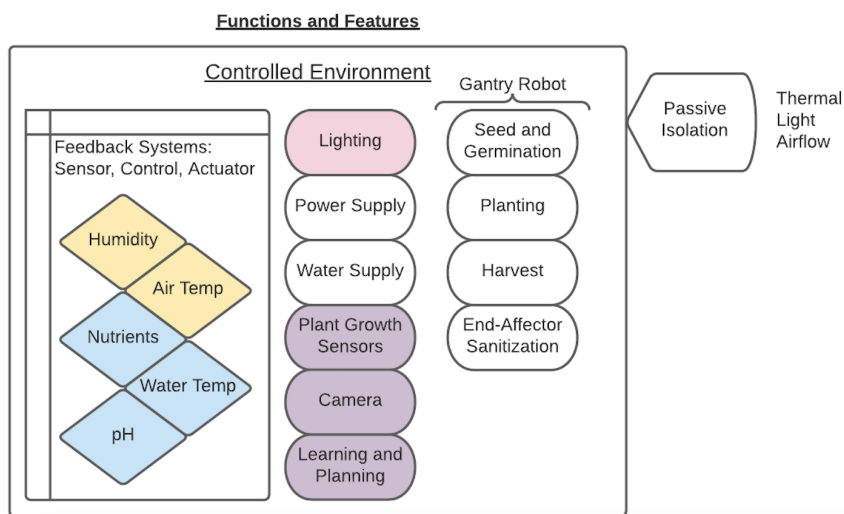


Figure 2: Features and feature types of PeaPod.

## 2.1 Automation

**Function:** Performing growth-, maintenance-, and data-related tasks autonomously on the basis of both schedule and necessity to reduce crew maintenance time. Maintains the homogeneity of the internal environment.

**Process:**

1. User inputs program:
  - Action-at-timestamp, e.g. lights on at 08:00;
  - Control target with start/end, e.g. hold air temperature at 22°C from 11:00 to 18:00;
2. Notification on maintenance requirement (i.e. non-automated input/output management);
3. "Sense, Plan, Act" robotics/control model:
  - (a) *Senses* current conditions;
  - (b) *Plans* a path to desired condition;
  - (c) *Acts* to change current condition to desired condition;

**Features:**

- Central computer system with internal clock and cloud connection;
- Environment sensors (*Sense*);
- "Program" of time-series and/or control target instructions (*Plan*);
- Actuators (*Act*);

**Justification:**

- **Function:** Increased accuracy/precision over human interference, minimize human hours spent. Enables control over all parameters simultaneously.
- **Process:** Data structure matches  $\vec{E}$  from the optimization routine (see Section 2.5). Control loop-style topology is common is well suited for controlled-environment agriculture.
- **Features:** Automation implies computers. Sensors and actuators directly parallel process components.

## 2.2 Housing

**Function:** *Isolates* and *Insulates* growth environment from exterior environment (heat, light, humidity). Provides structural integrity and mounting points for other subsystems (*Frame*).

**Process:**

- Insulation (*keep in*):
  - Heat - Insulative/reflective internal shell
  - Light - Reflective internal shell
  - Moisture - "Sealed" shell
- Isolation (*keep out*):
  - Heat - Insulative shell
  - Light - Opaque shell
  - Moisture - "Sealed" shell
- ∴ Frame skeleton w/ solid, internally-reflective, "sealed" panels;
- Standard subframes for mounting entire subsystems modularly;

**Features:**

- Aluminum extrusion skeleton w/ standard mounting channels;
- Foam insulation panels w/ mylar internal coating slide into exoskeleton channels;
- Trays - base subframe unit, adaptable; mounted to vertical internal channels for vertical repositioning:
  - Grow trays - Hold up plants, aeroponic nozzles (See 2.3, and misting container.
  - Lighting trays - Many LED boards, one driver board (See 2.4.7).

**Justification:**

- **Function:** Insulation increases thermal and light efficiency. Isolation increases safety against cross-contamination, pathogens, harmful substances.
- **Process:** Solid frame-and-panel construction is efficient for packing away, and is honestly just simple. Adaptable tray subframes make future feature development easier, and allows to modularly swap subsystems.
- **Features:** Aluminum extrusion is commonly used for frames. Allows strong, repositionable mounting via channels. Foam insulation is highly insulative and opaque, and mylar ensures

internal light reflection. Sliding directly into extrusion channels boosts "seal".

## 2.3 Aeroponics

**What:** Medium-free growing method that uses nutrients dissolved within atomized water.

**How:** High-pressure nozzles deliver atomized nutrient solution to plant roots. Uses parallel distribution topology.

- Pump fills tank with water that has nutrients dissolved within;
- Tank uses an air bladder to hold water at desired PSI;
- Switch checks line pressure and activates/deactivates pump to maintain PSI;
- Solenoid ball valve feeds water to nozzle;
- Nozzle atomizes water to  $\approx 50$  micron droplets;
- T-quick connects with solenoid ball valves at every unit height feed individual trays;

**Why:** No water parameter feedback, 98% more water efficient, minimizes pathogens and waste water.

## 2.4 Environment Control

The environment control feature can be broken up into **control systems** (2.4.1-2.4.3; sometimes in two parts) and **set systems** (2.4.4-2.4.7).

### 2.4.1 Air Temperature

**What:** Maintaining desired air temperature within the enclosure.

**How:** Thermoelectric heating/cooling system (peltier tiles w/ polarity switch, 'dimming' current control, PID) on a heat sink w/ fan, feedback from distributed temp sensors.

**Why:** TECs have better space and energy efficiency, less complexity (no liquids, pressurized fluids, etc.), better control vs other methods. PID provides best control.



### 2.4.2 Air Humidification

**What:** Adding water vapour to air.

**How:** Ultrasonic nebulizer (piezo disc w/ custom driver circuit), RO water.

**Why:** Piezo for droplet size, commonly used; RO for purity of water vapour.

### 2.4.3 Air Dehumidification

**What:** Absorbs water vapour from the air.

**How:** Silica gel bead cartridges with fans/valves to control airflow across.

**Why:** Non-toxic, safe, cheap, effective. Color-changing indication at saturation, easily reset by baking and recapturing water.

### 2.4.4 Solution Temperature

**What:** Maintaining desired water temperature within the water store.

**How:** Same as 2.4.1; on a water block.

**Why:** Same as 2.4.1.

### 2.4.5 Solution Nutrients

**What:** Precisely dosing the correct amount of various nutrients ( $K^+$ ,  $NO_3^-$ , etc.) to the water system at setup/water addition.

**How:** Syringe-like dosage via servo motor to set ppm based on fill volume.

**Why:** Syringe dosage is precise, easy to refill.

### 2.4.6 Solution pH

**What:** Precisely adds pH up/down solutions to set the solution pH at setup/water addition.

**How:** Same as 2.4.5.

**Why:** Same as 2.4.5.

### 2.4.7 Lighting

**What:** Wide spectrum precision LED lighting targeting PAR.

**How:** N LED series/colors, N controlled-current PWM drivers, M LEDs per series = NxM LEDs. Custom LED boards wired in series, one power board per tray, w/ diffusion.

**Why:** LED > every other type in every way, PWM easy protocol, CC because they're LEDs.

## 2.5 Optimization

## References

- [1] “DSFC Applicant Guide,” Impact Canada, launched by NASA/CSA. [Online]. Available: <https://impact.canada.ca/en/challenges/deep-space-food-challenge/application-guide>