


A Solid-based Architecture for Decentralised Interoperable Location Data

Maxim Van de Wynckel, Beat Signer

*Web & Information Systems Engineering Lab
Vrije Universiteit Brussel*

Current indoor positioning systems (IPS)

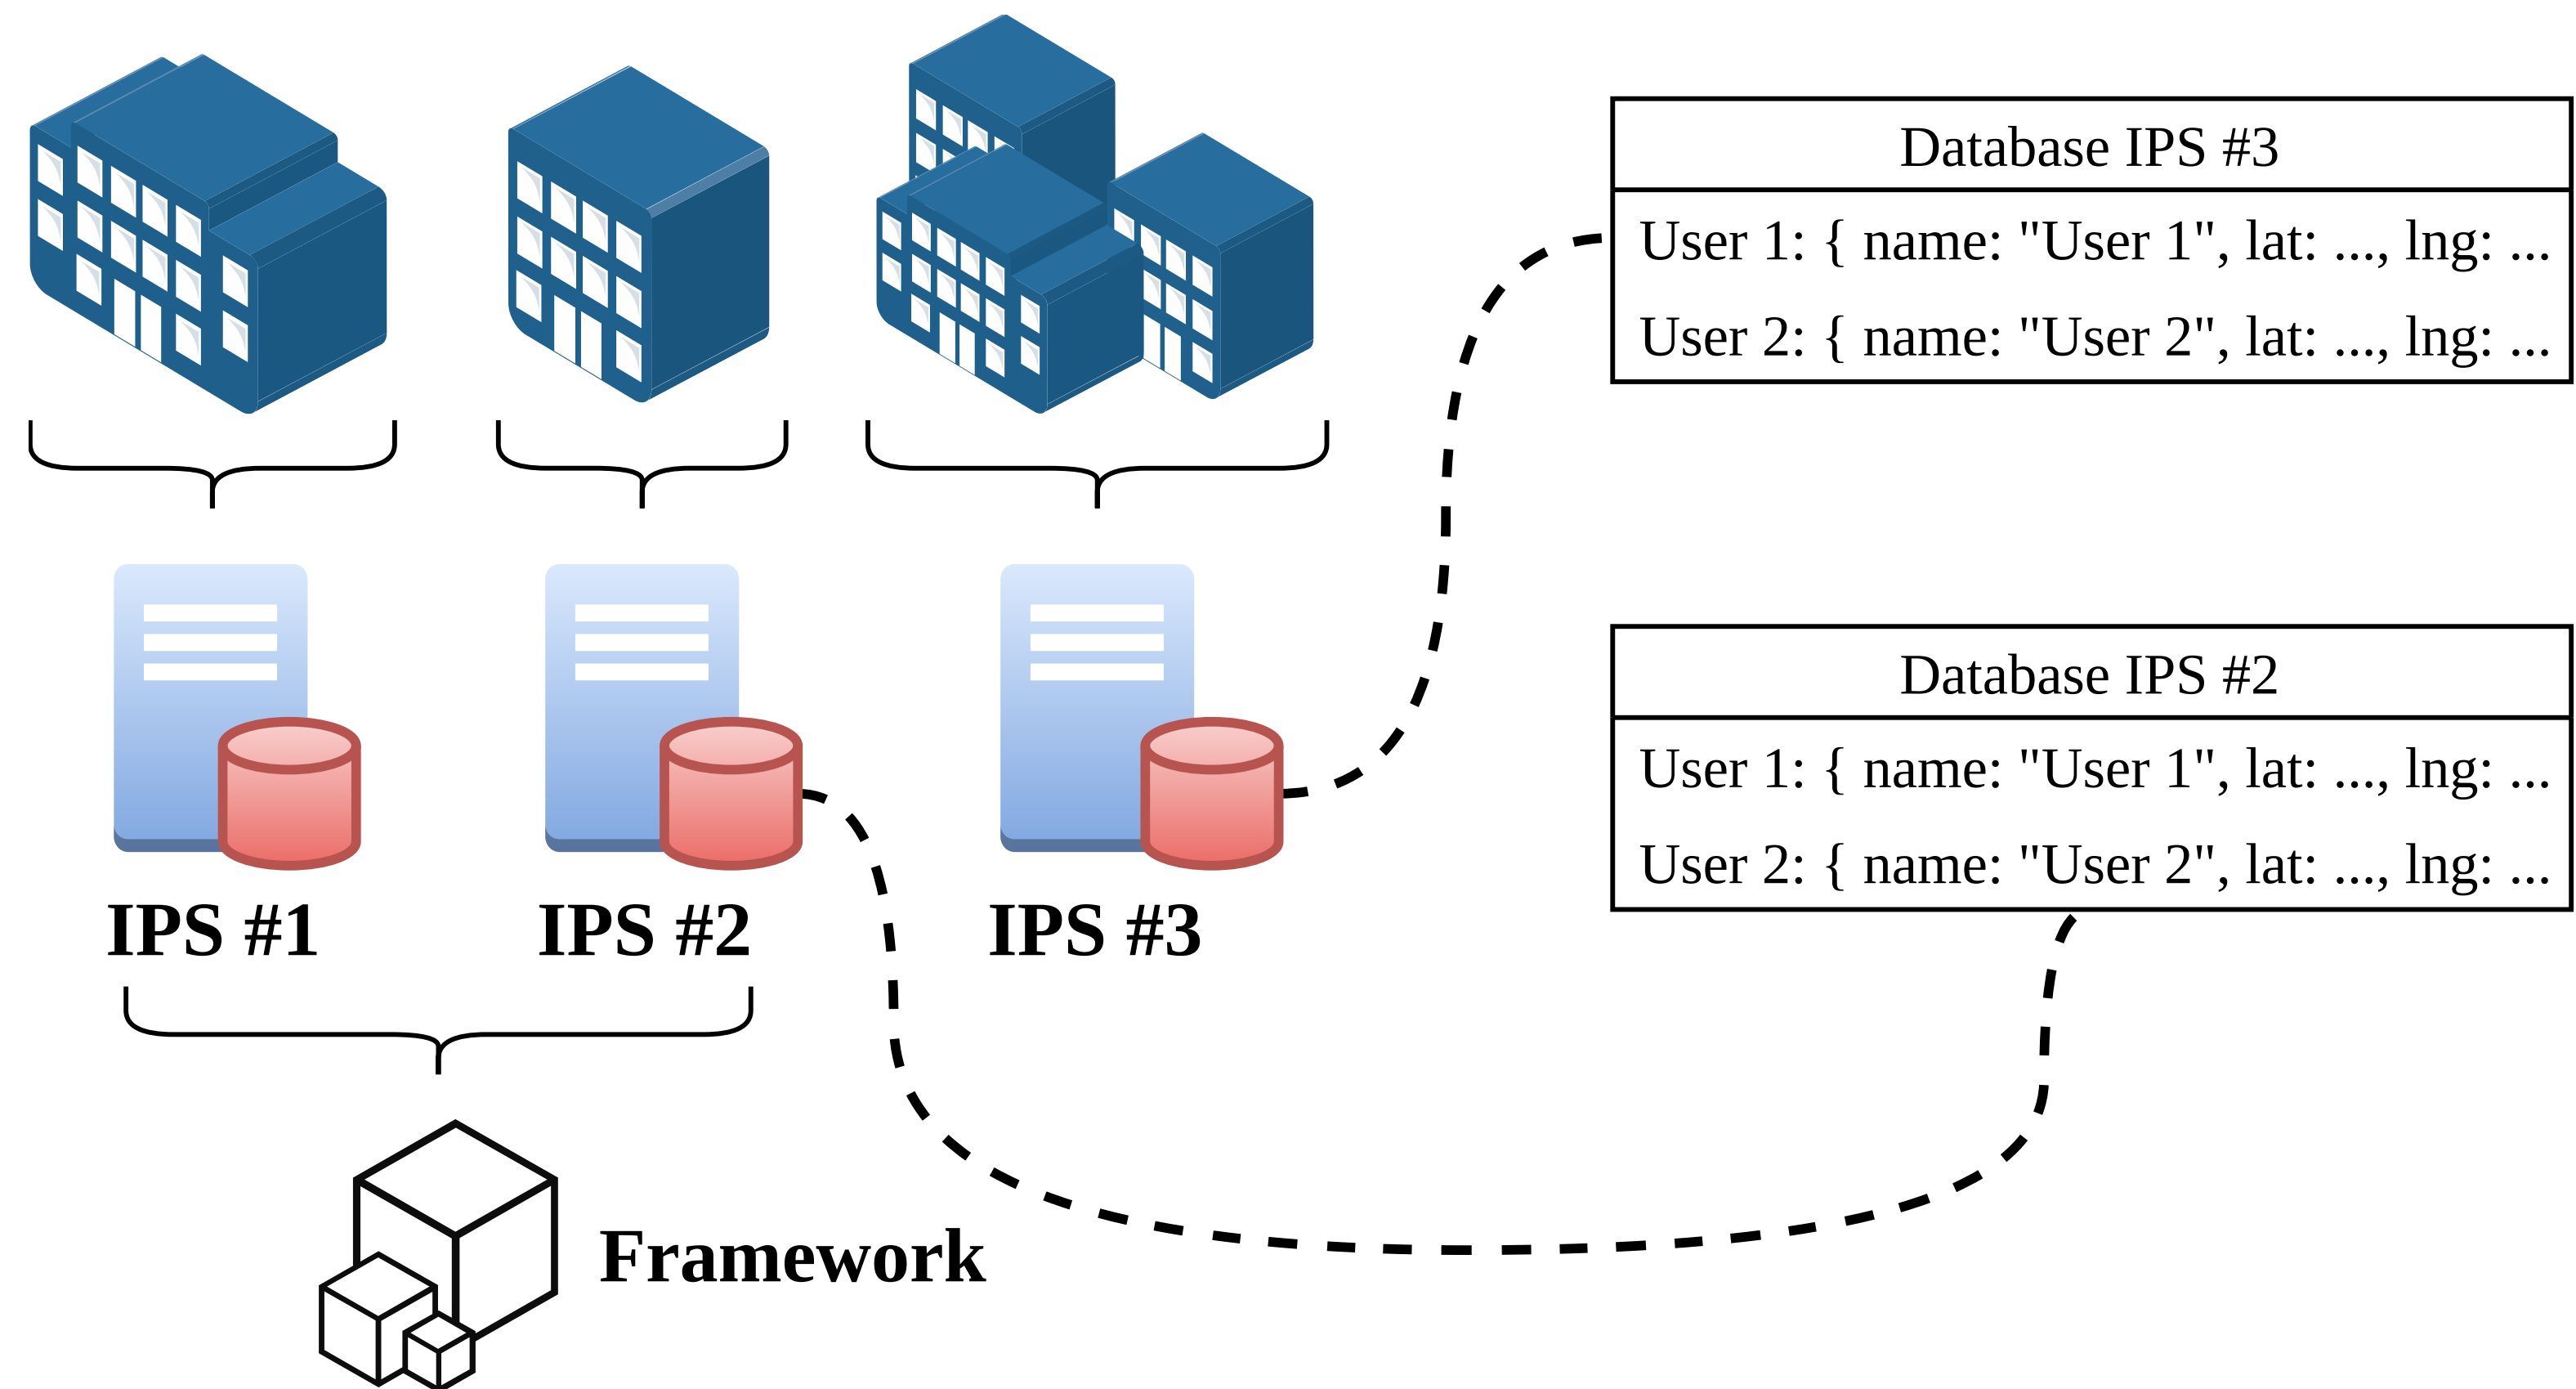


Problems with current IPS'

1. Users not in **control** of their **data**
2. No **interoperability** between positioning **systems**
3. No **interoperability** between (navigation) **applications**

What is Solid?


What is Solid?

RDF: Properties and Observations

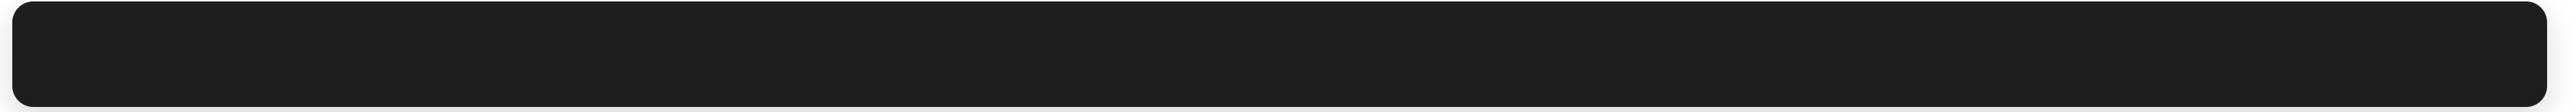

PoC Demonstrator


Geolocation API (a)

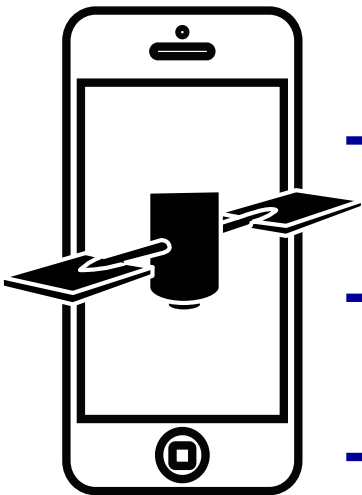

APPEND
.../position.ttl

APPEND
.../orientation.ttl

APPEND
.../velocity.ttl

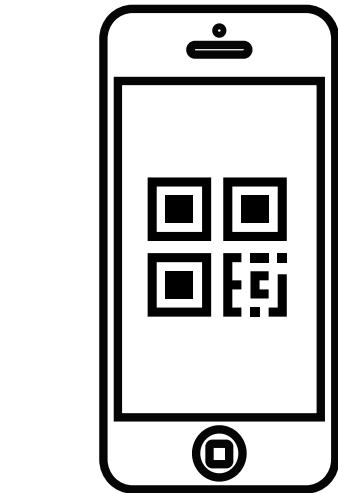


READ
.../position.ttl

APPEND
.../position.ttl

QR-scanner IPS (b)

User Pod (c)

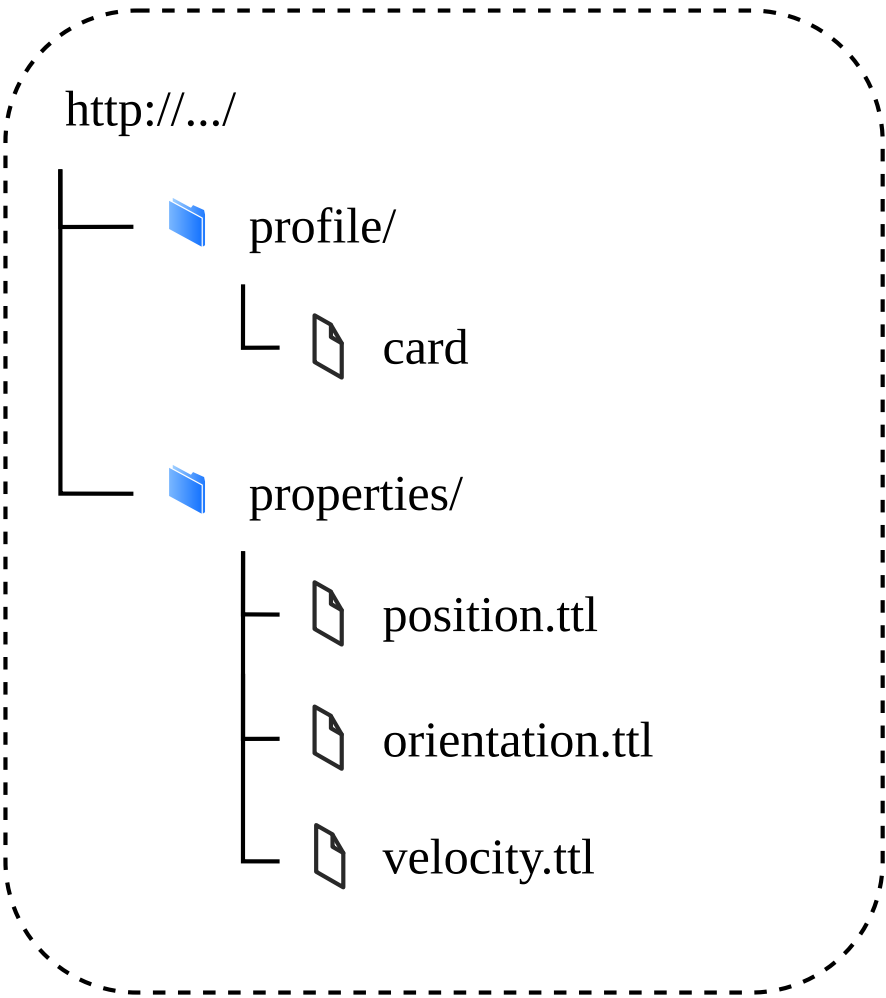

READ

.../position.ttl

READ

.../orientation.ttl

READ

.../velocity.ttl

NOTIFICATION


.../position.ttl

NOTIFICATION

.../orientation.ttl

NOTIFICATION




.../velocity.ttl

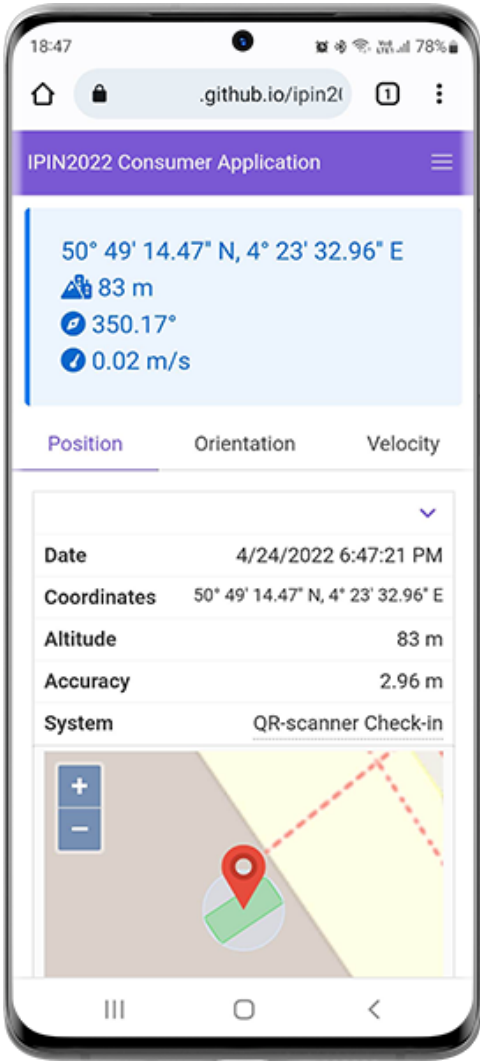

Consumer Application (d)

Developed using  OpenHPS

PoC Demonstrator ...

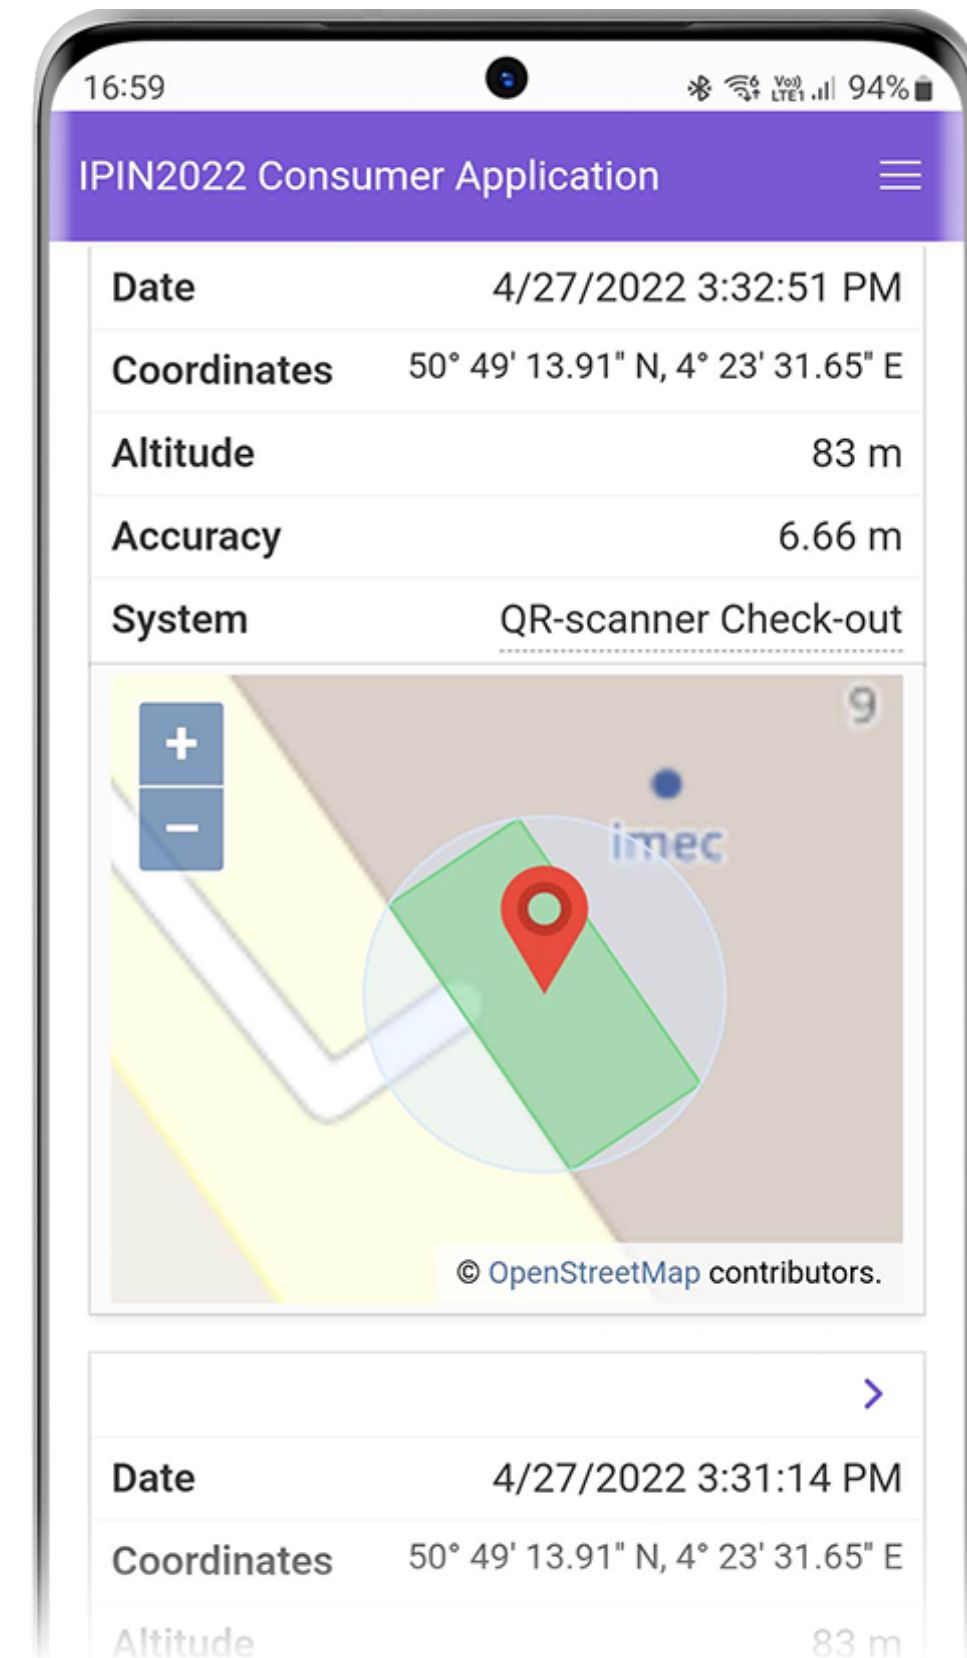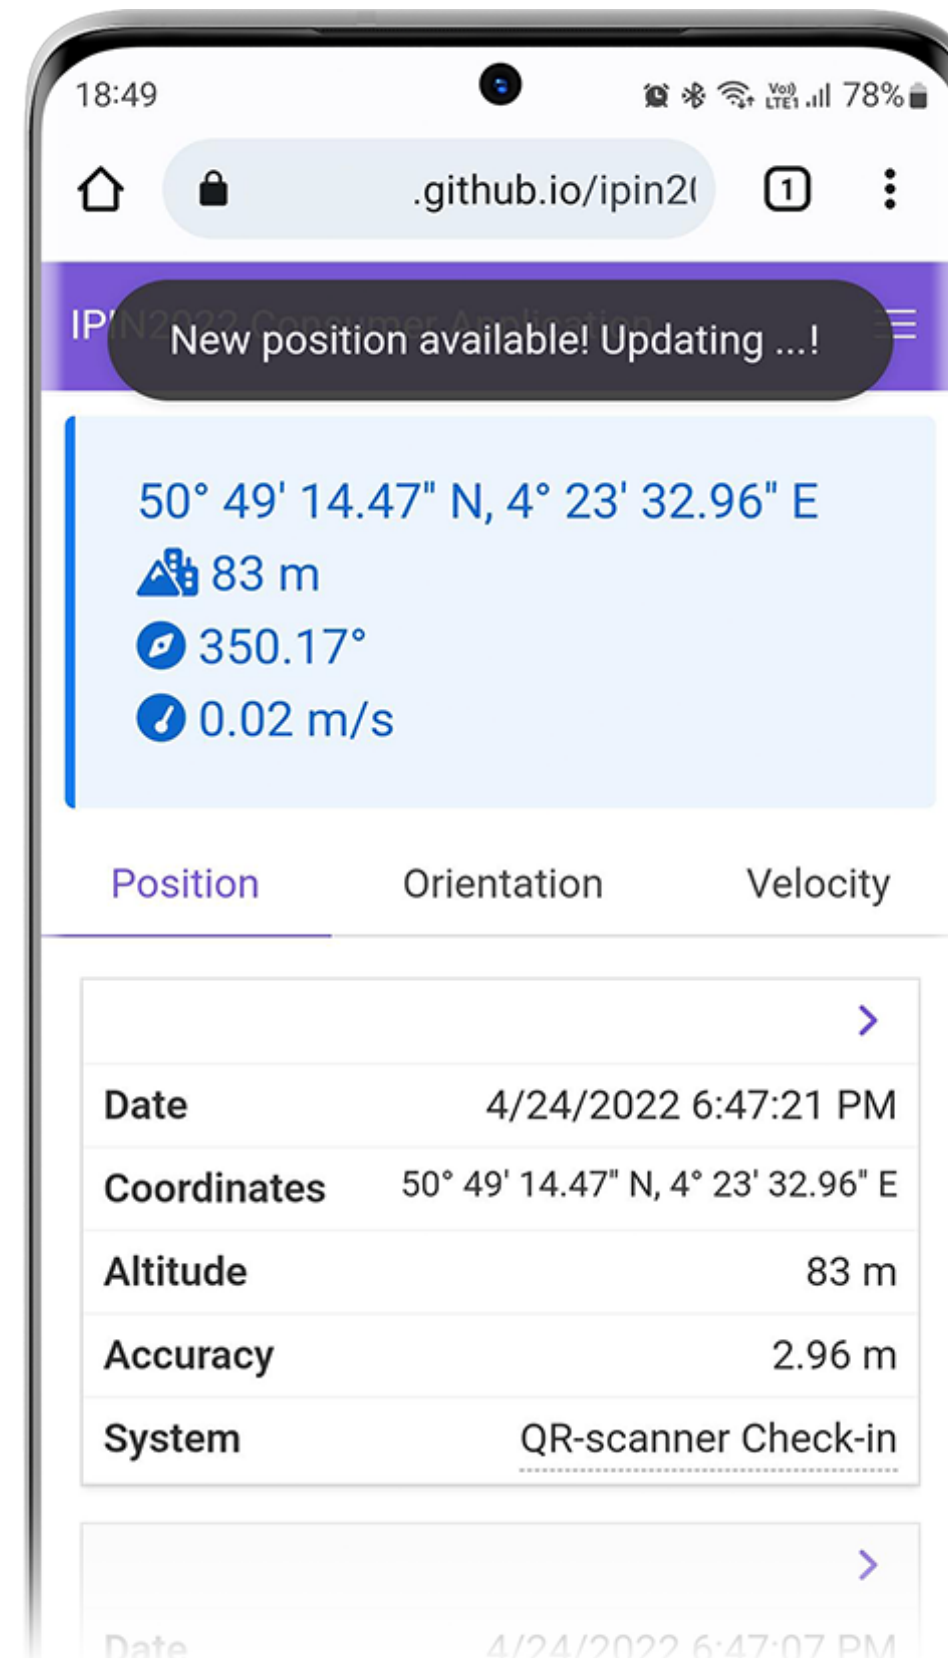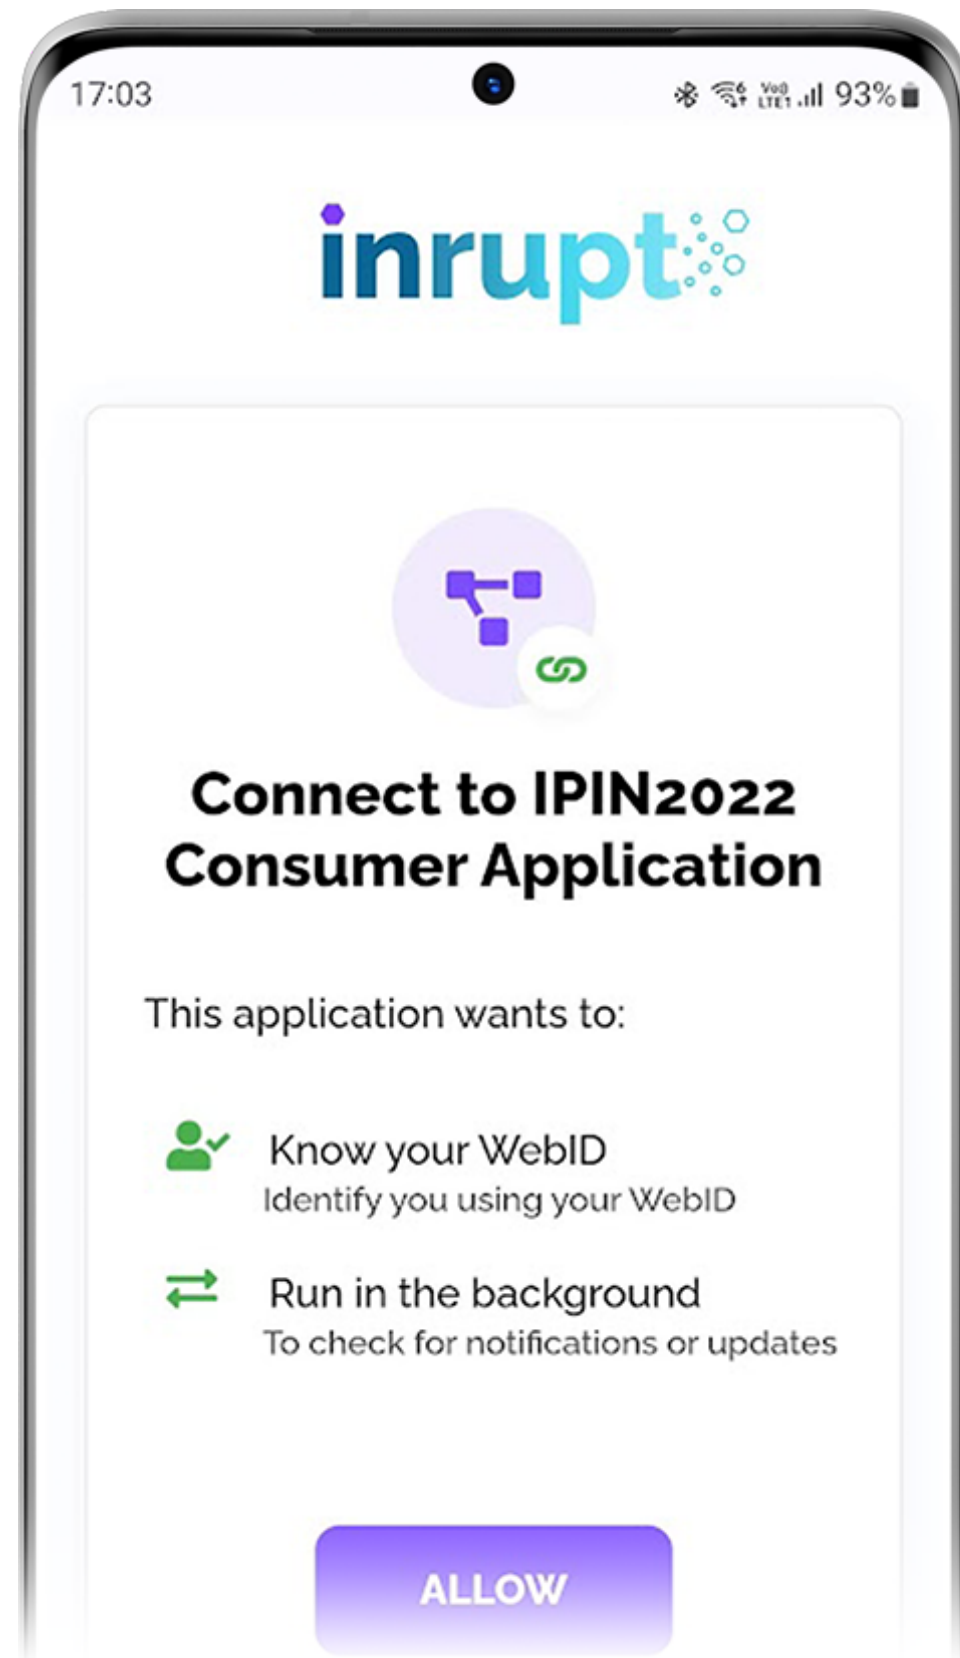

PoC Demonstrator ...

```
SELECT ?posGeoJSON ?datetime ?accuracy {  
  ?profile a sosa:FeatureOfInterest ;  
    ssn:hasProperty ?property .  
  ?observation sosa:hasResult ?result ;  
    sosa:observedProperty ?property ;  
    sosa:resultTime ?datetime .  
  ?result geosparql:hasSpatialAccuracy ?spatialAccuracy ;  
    geosparql:asWKT ?posWKT .  
  BIND(geof:asGeoJSON(?posWKT) AS ?posGeoJSON)  
  ?spatialAccuracy qudt:numericValue ?value ;  
    qudt:unit ?unit .  
  OPTIONAL { ?unit qudt:conversionMultiplier ?multiplier }  
  OPTIONAL { ?unit qudt:conversionOffset ?offset }  
  BIND(COALESCE(?multiplier, 1) as ?multiplier) # Default 1  
  BIND(COALESCE(?offset, 0) as ?offset) # Default 0  
  BIND(((?value * ?multiplier) + ?offset) AS ?accuracy)  
} ORDER BY DESC(?datetime) LIMIT 20
```