

Datasheet

LuxaLight Pixel LED-strip TM1814 Amber + White Protected (24 Volt, 96 LEDs, 2835, IP64)

LS24AMW96TM1814PLX

Version: 2025-02-05.1

Technical specifications


General										
Brand	LuxaLight									
LEDs / meter	96									
LEDs per pixel	12									
LED type	2835									
Length per reel	10 m									
Length per segment	125 mm									
LED strip width	12.00 mm									
LED strip thickness	2.50 mm									
PCB color	White									
Mantle material	Silicon									
Dimensions	10.000 × 12 × 2,5 mm									
Mounting	3M tape VHB4905									
Lifetime	50000 hours									
Lighting										
Color temperature white	5000 ~ 5200 K									
Color temperature amber	1600 ~ 1700 K									
CRI	≥ 80									
Luminous flux white	1239 lm									
Luminous flux amber	552 lm									
BIN	3 SDCM									
Beam angle	120 °									
LB waarde	L90B50									
Electronics										
Working voltage	24V									
Current / meter	0.80 A / meter									
Power consumption per meter	19.20 W / meter									
PCB material	Copper									
Driving method	Constant voltage									
Pinout	<table><tr><th>Symbol</th><th>Function</th></tr><tr><td>V+</td><td>V+</td></tr><tr><td>D1</td><td>Data in</td></tr><tr><td>GND</td><td>Ground</td></tr></table>		Symbol	Function	V+	V+	D1	Data in	GND	Ground
	Symbol	Function								
	V+	V+								
	D1	Data in								
GND	Ground									
Control										
Number of channels	2									
IC type	TM1814									


Environmental

Operating temperature	-20 ~ +60 °C
Storage temperature	-40 ~ +80 °C
IP class	IP 64

Measurement results

Amber 1659K

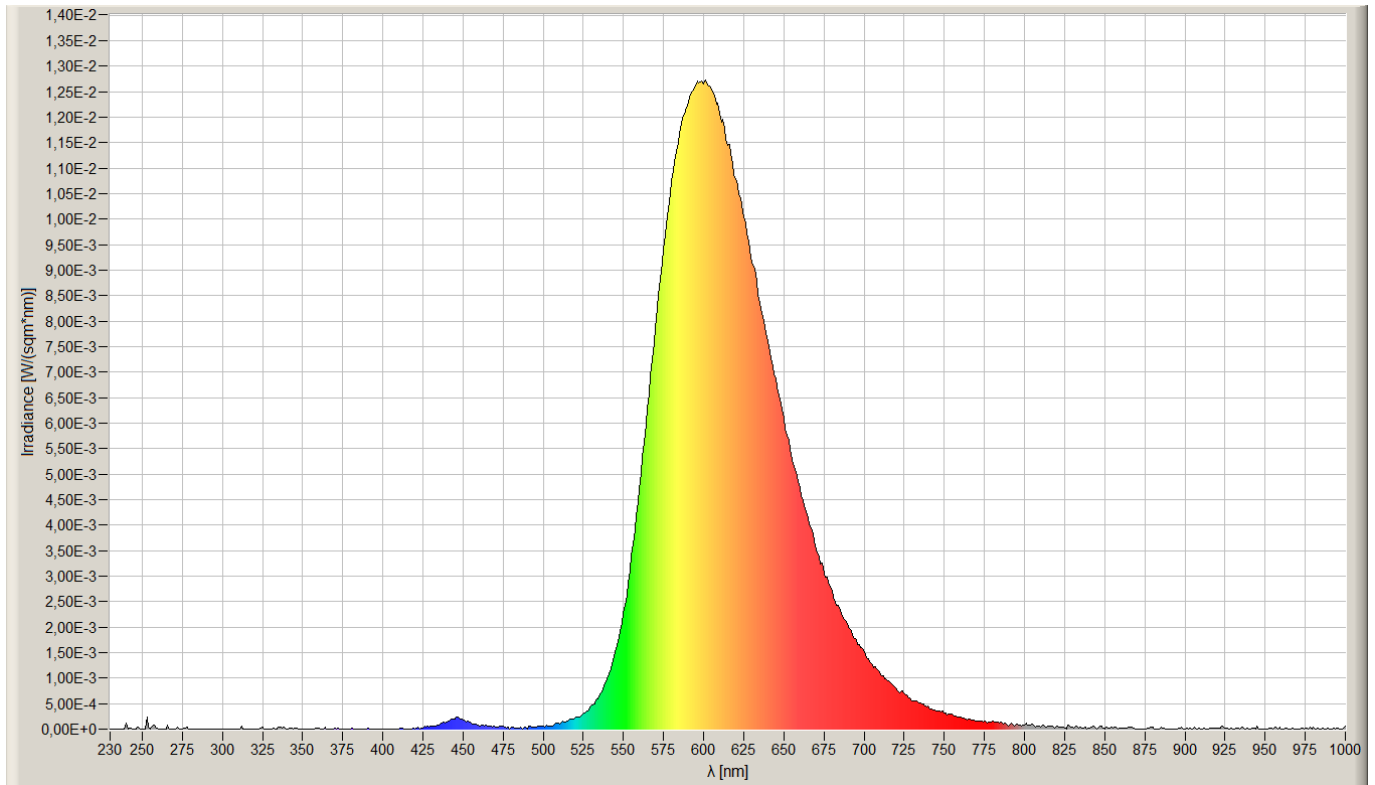

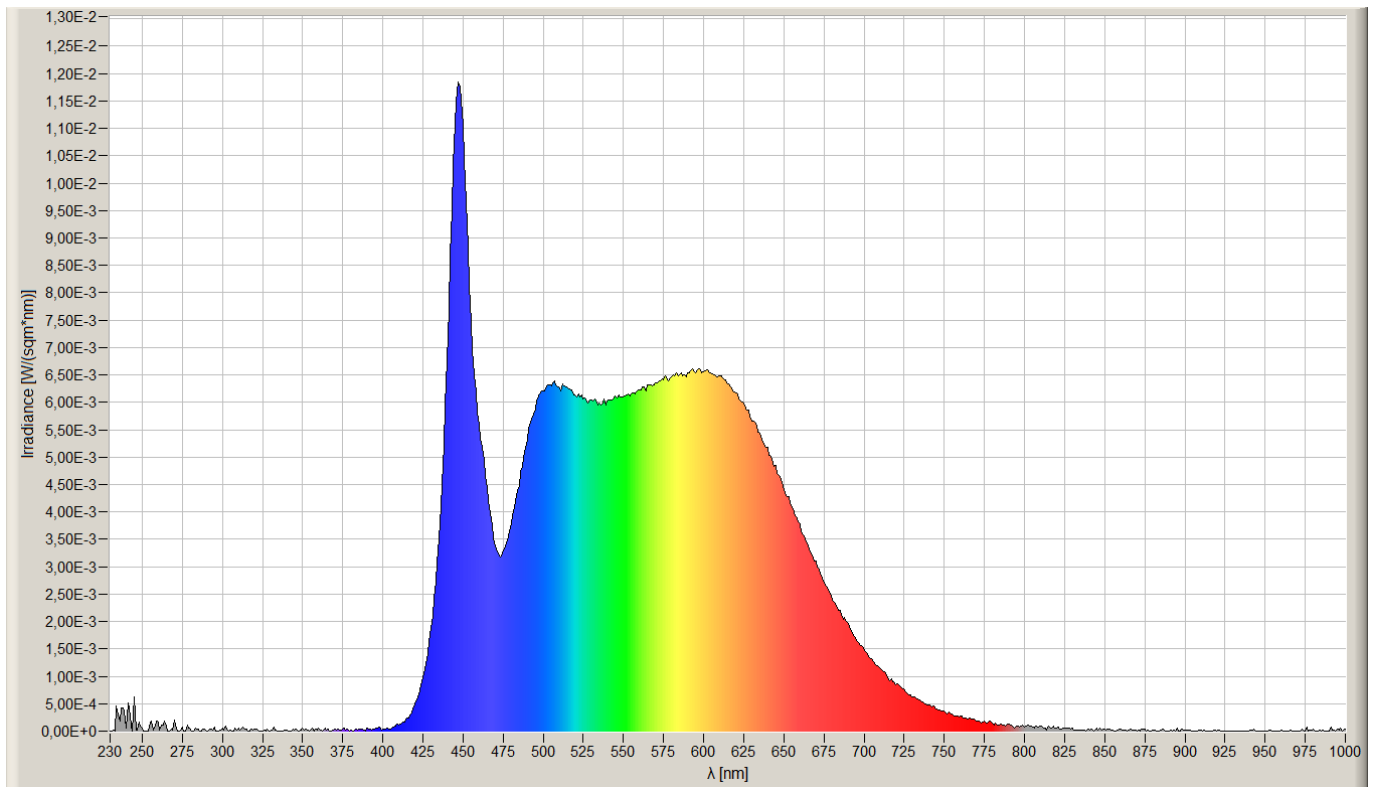White 5140K

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.