How wide is rue de Terrebonne?

The roadway along the lane, measured on the City's 2015 LiDAR

Terrebonne-open-sources (a resident of
Côte-des-Neiges–Notre-Dame-de-Grâce)

2026-11-04

The question


- The winter layout adopted on November 2, 2026 (file 1266880005) turns the lane running with traffic into parking and has cyclists share the traffic lane.
- The borough's 2023 study drew that type of section (EXP, Fig. 6-6): parking 2.4 + shared lane 3.5 + parking 2.4 + buffer 0.5 + contraflow lane 2.0 = **10.8 m** curb to curb.
- Is the street 10.8 m wide, everywhere along its 2.4 km? That decides how much room any winter layout has.

Source: EXP 2023, p. 72; borough file 1266880005, pp. 207–212 of the Nov. 2 bundle.

Data and method


- Ville de Montréal, LiDAR aérien 2015 (open data, CC-BY 4.0): ground returns averaged on a 0.25 m grid along the corridor.
- A cross-section every 2 m along the lane's axis (1207 stations), 16 m each side, every 0.1 m.
- Curb = the first rise of 7 cm over 0.5 m outward from the axis, 3–8 m out (a curb face is 10–15 cm; a 1:12 driveway ramp rises 4 cm and does not pass).
- Night flight, cars at the curbs: no ground under a car. Stations with both curbs found and a width of 9–13 m are kept: 759.
- Right-of-way: parcel line to parcel line on the same section (City assessment units).

The roadway is 11.0 m wide, along the whole street

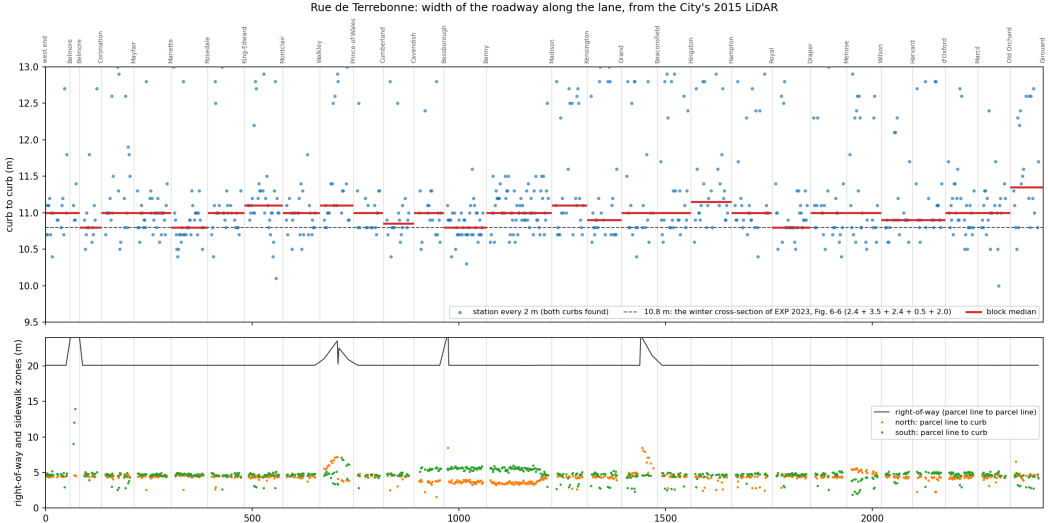


Ground elevation: Ville de Montréal, LiDAR aérien 2015 (CC-BY 4.0), ground returns averaged on a 0.25 m grid; parcels: Ville de Montréal, unités d'évaluation foncière (CC-BY 4.0). Curb = the first rise of 7 cm over 0.5 m outward from the axis, between 3 and 8 m. Stations where a parked car or a tree hid a curb are left out.

What a cross-section looks like

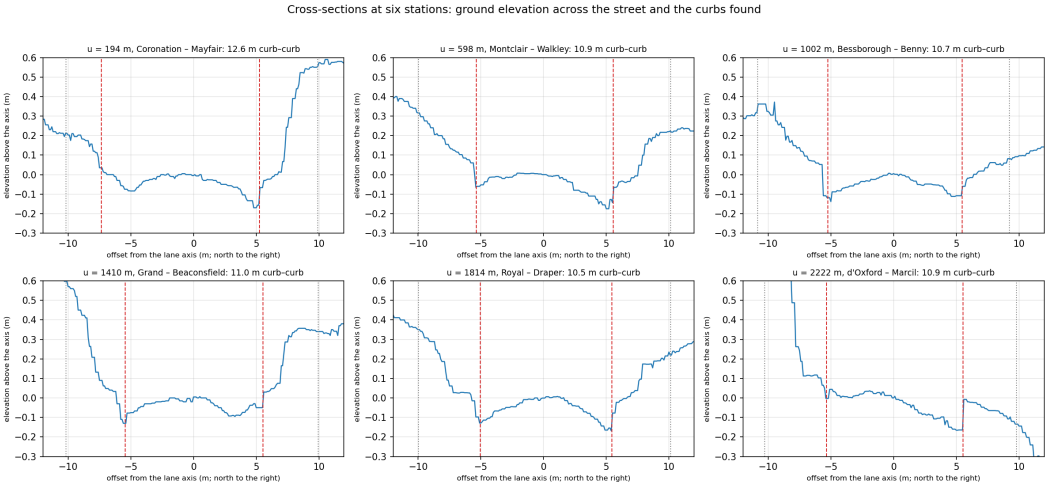


Review: every curb detection on the LiDAR surface

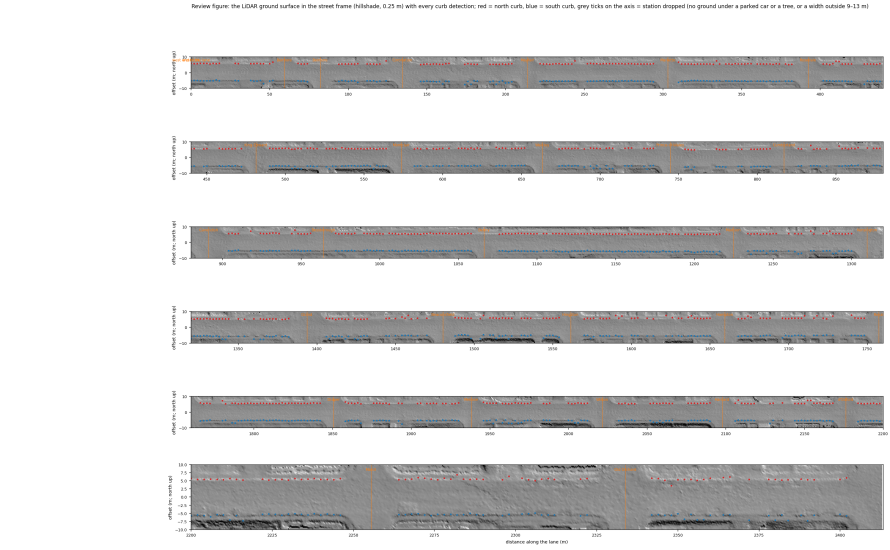

Hillshade of the ground surface in the street frame; red = north curb, blue = south curb; grey ticks on the axis = stations dropped (a parked car or a tree

The west end, where the public street meets the Loyola campus

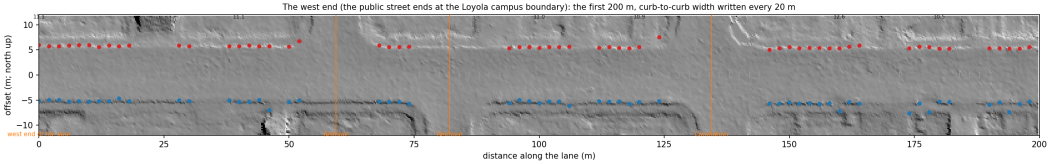

The last public block (west end to Belmore) reads 11.0 m curb to curb (19 of 30 stations), a 20.09 m right-of-way and 4.4–4.7 m sidewalk zones: the same section as the rest of the street. Beyond the lane's end the roadway is the campus's, not the City's (géobase). The 2015 surface and the pre-2024 imagery cannot measure the 2024 bike lanes themselves; a two-way block with no parking fits 11.0 m as, for example, 2.0 + 0.5 + 3.0 + 3.0 + 0.5 + 2.0 (arithmetic, not the plan).

The figures

- Curb to curb: median **11.0 m** (p10 10.7, p90 12.4); block medians 10.8–11.35 m.
- Right-of-way 20.09 m everywhere but the Belmore stub and three lots: the 66-foot standard.
- Sidewalk zones, parcel line to curb: 4.4 m north, 4.73 m south.
- EXP 2023 itself (p. 50): « une chaussée d'environ 11 m et deux trottoirs d'environ 1,8 m », 14.6 m in all: the LiDAR reconciles with the study's own measure.
- Before 2024: two 3.3 m lanes and two 2.2 m parking bands = 11.0 m. Winter layout: 10.8 m of the 11.0 m.

What it means for the shared lane

- The 2023 drawing uses 10.8 of the 11.0 m: **about 0.2 m spare across the whole street**.
- A shared lane wider than 3.5 m can only come from the parking bands (2.4 m), the buffer (0.5 m) or the contraflow lane (2.0 m).
- With a cyclist 0.75 m wide at 0.5 m from the parked cars and the Code's 1 m clearance, 1.75 m of the shared lane is left for a car 1.8–2.0 m wide before mirrors (EXP Fig. 6-6; the owner's sketches). The width measured here does not change that arithmetic; it confirms the drawing's premise.
- In winter, windrows push the parked cars toward the lane line: the measured 11.0 m is the summer maximum.

Caveats and where to find it

- One reading is good to about 0.2 m (0.25 m grid); use the block medians. Blocks with few kept stations carry more uncertainty.
- 2015 surface, 2024 markings: the curbs have not moved; the markings are not in the LiDAR.
- Every station, every block and the code:
  `https://openmobilitydata.github.io/Terrebonne-open-sources/2015-lidar-terrebonne-street-width/`