


8	7	6	5	4	3	2	1
D							D
C	COVER PAGE						C
B	PROJECT NAME	ON3X2424G013					B
	DESIGNER	PEGN.YOU					
	START TIME	2025-11-11					
A	NOTE						A
8	7	6	5	4	3	2	1
					TITLE: COVER PAGE		DATE: 2025-11-11
					ENGINEER: PENG.YOU		PAGE: 1 OF 5

8		7		6		5		4		3		2		1	
CONTENTS															
PAGE		DESCRIPTION													
4		ESP32-S3/FLASH/IO													
5		POWER/LCD													
</															

ESP32-S3


RATED VOLTAGE: 3.3V.
RATED CURRENT: 500MA MAX.
FREQUENCY: 2412~2484MHZ WI-FI 2.4GHZ
2402~2480MHZ BLE

POWER

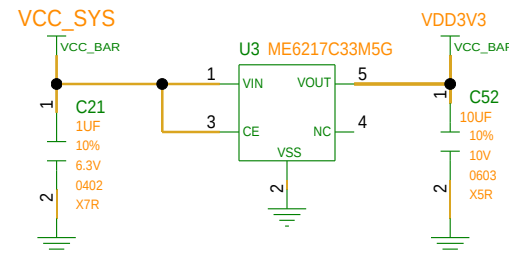


INPUT VOLTGE:15V MAX
OUTPUT VOLTG:3.3V
CURRENT: 800MA MAX.


HEADER

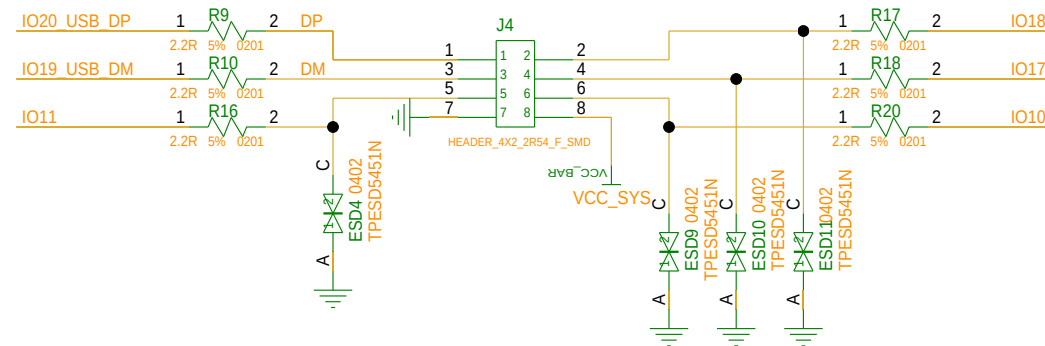


DEBUG

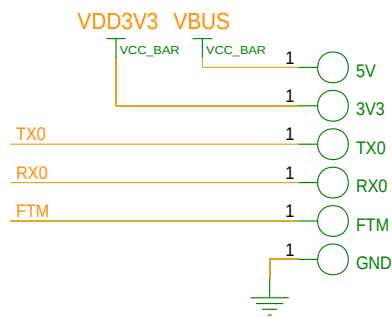


FLASH

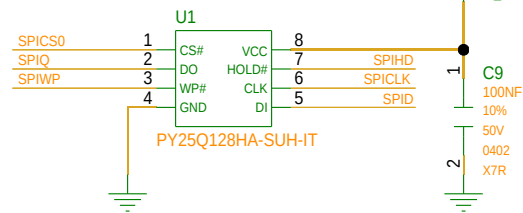


BOOT

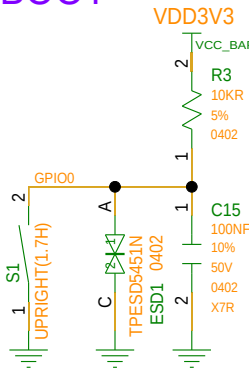

RST

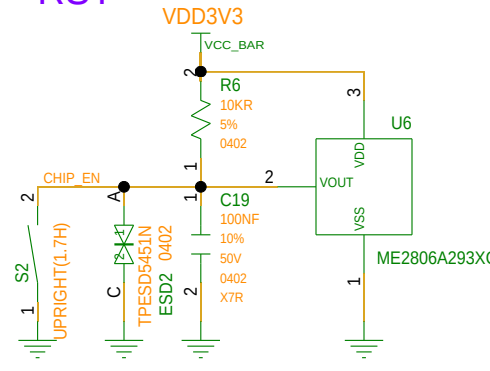


KEY

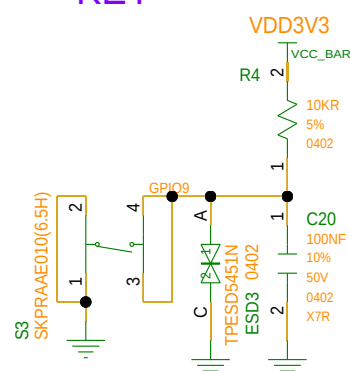


TITLE:	ESP32-S3	DATE:	2025-11-11
ENGINEER:	PENG.YOUT	PAGE:	4 OF 5


TYPE-C

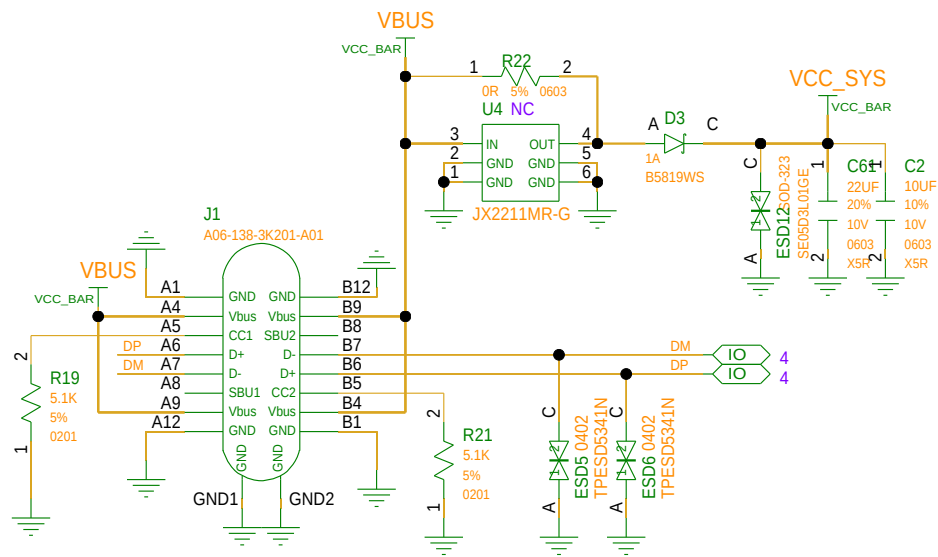



UART0

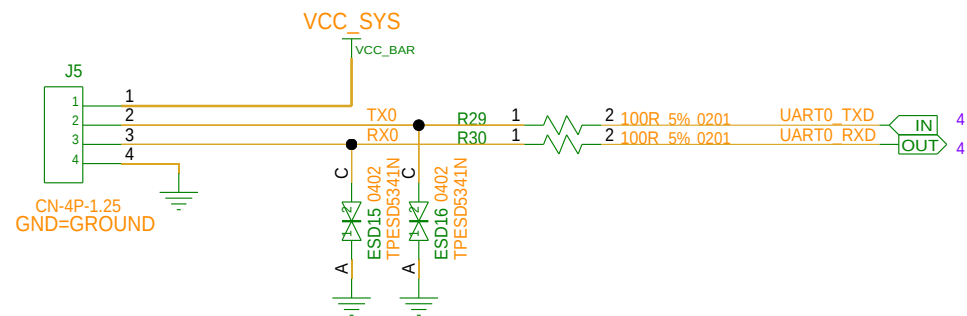

KNOB

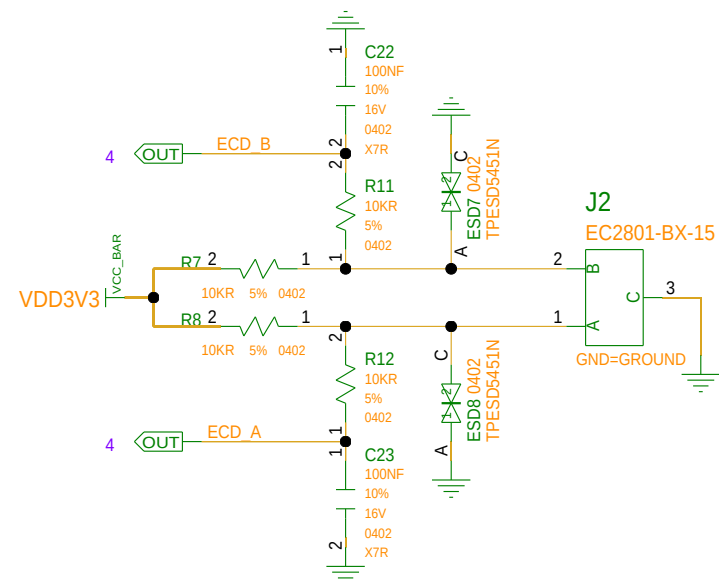

LCD

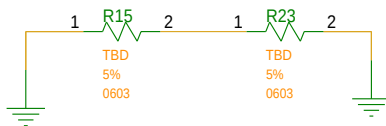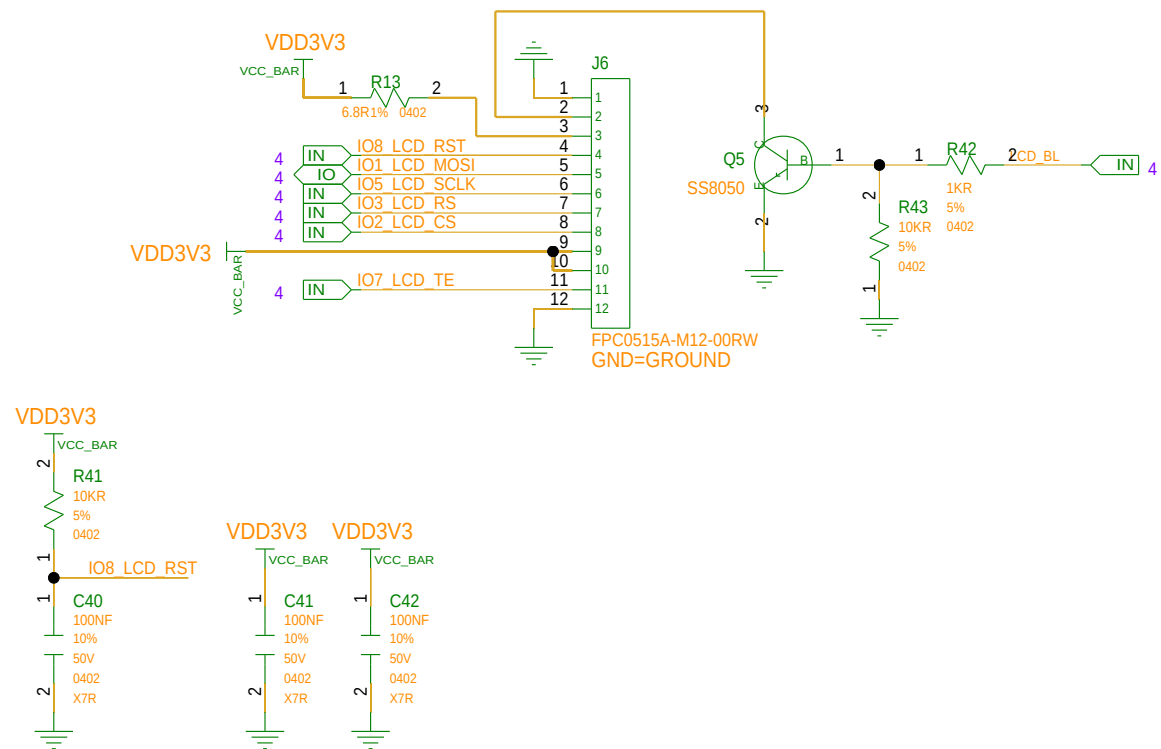

TITLE:	TYPE-C/LCD/KNOB	DATE:	2025-11-11
ENGINEER:	PENG.YOUT	PAGE:	5 OF 5