nuvoton

Dual Bank Firmware Upgrade User Guide

Application Note for 32-bit NuMicro® Family

Document Information

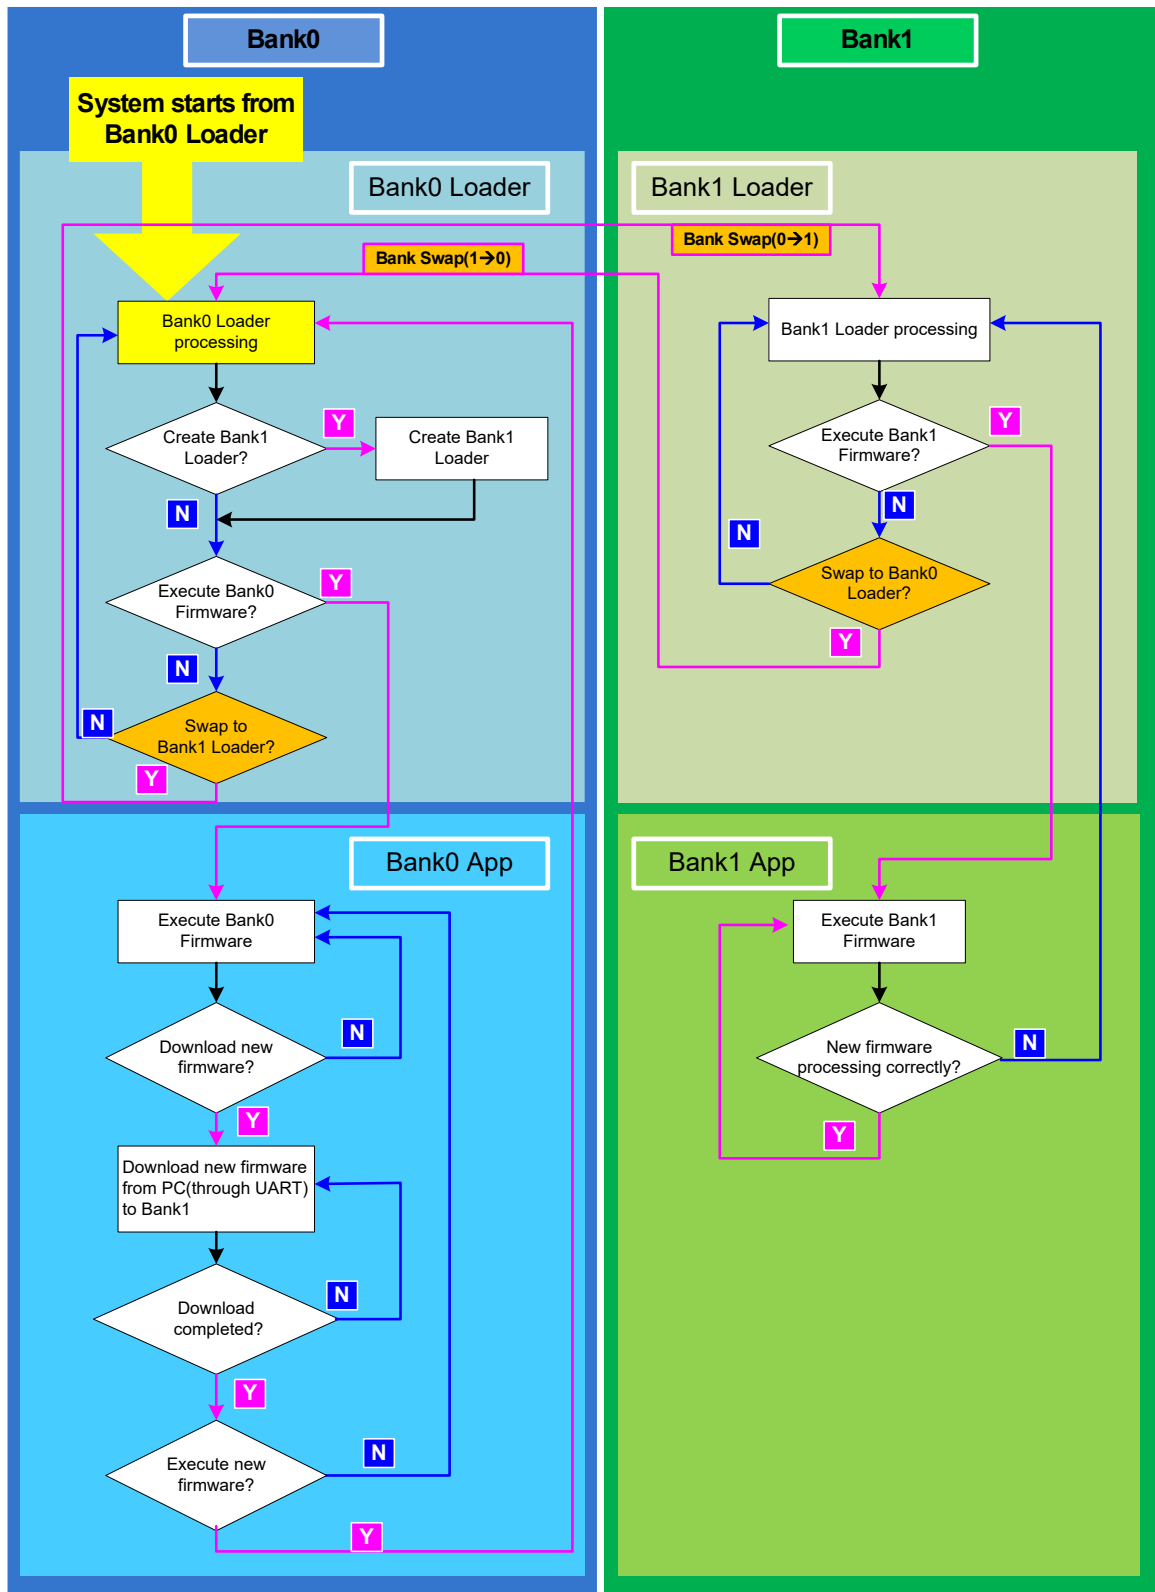|	
Abstract	Demonstrate how to implement Dual Bank Firmware Upgrade under the M2354 architecture.
Apply to	NuMicro® M2354 Series.

Table of Contents

1   Sample Code Introdunction

M2354 BSP provides a Dual Bank firmware upgrade sample program, located at:
\bsp\SampleCode\StdDriver\FMC_DualBankFwUpgrade。

This sample program implements a Dual Bank firmware upgrade framework under the Dual Bank APROM architecture of M2354. There are two main programs:

- Loader:
  Perform the control flow of system startup and firmware upgrade, which are placed at the starting address of APROM Bank0 and Bank1 (Bank0 Loader base and Bank1 Loader base in the figure below).
- App:
  Executable programs placed in the program execution areas of APROM Bank0 and Bank1 (Bank0 App base and Bank1 App base in the following figure). The App may be active firmware or new firmware。

	0x0007_FFFF	
Bank0 App base	App0 0x0001_0000	
Bank0 Loader base	Loader0 0x0000_0000	
	APROM Bank0	

|		
	0x000F_FFFF	
	App1 0x0009_0000	Bank1 App base
	Loader1 0x0008_0000	Bank1 Loader base
	APROM Bank1	
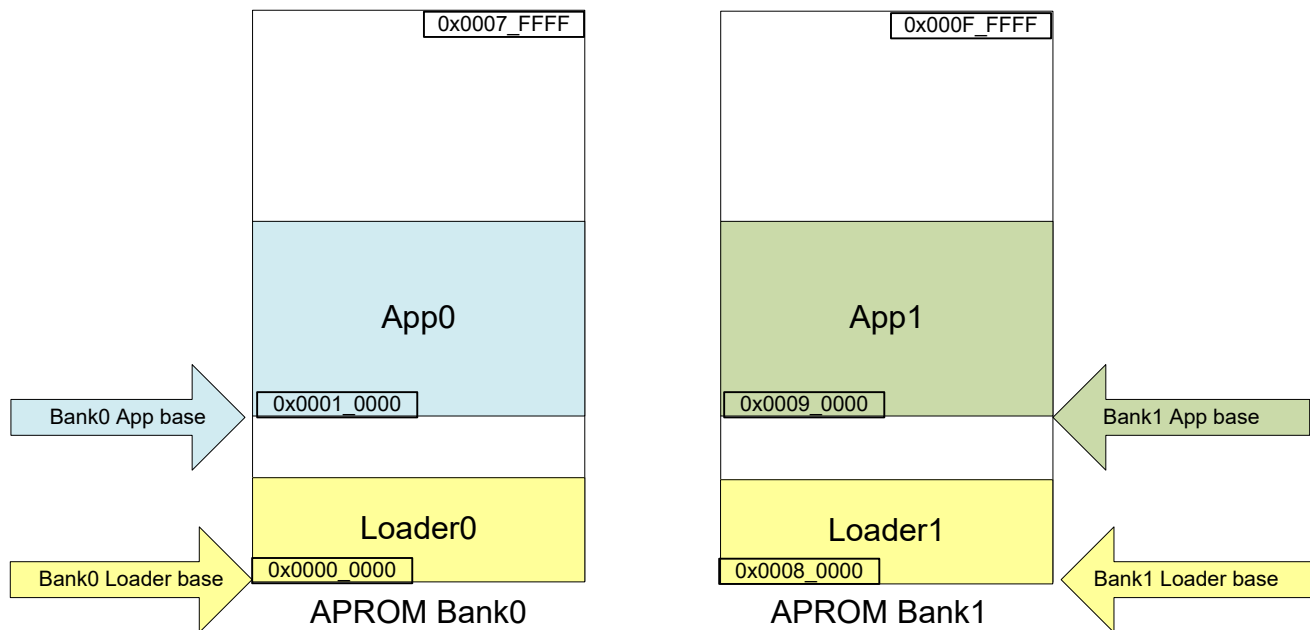
The system control process is as follows:

2 The Operation of Firmware Upgrade Sample Code

Before executing the program, first define the firmware naming used in the operation steps：

- Active firmware：

  The firmware that is initially placed in the Bank0 App area is also the firmware that the system executes under normal condition.

- New firmware：

  The new firmware loaded in firmware upgrade process.

In \bsp\SampleCode\StdDriver\FMC_DualBankFwUpgra ， open the project FMC_DualBankFwUpgrade.uvmpw. This project has two targets: Loader and App. First select the Loader target. As shown in the figure below:
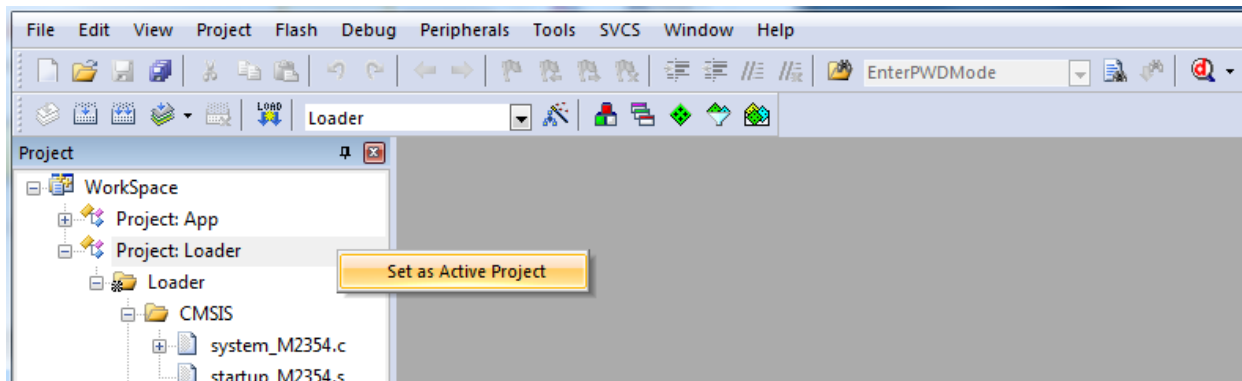
After compiling done, click the "LOAD" button to load the Loader into the Bank0 Loader execution area. As shown in the figure below:
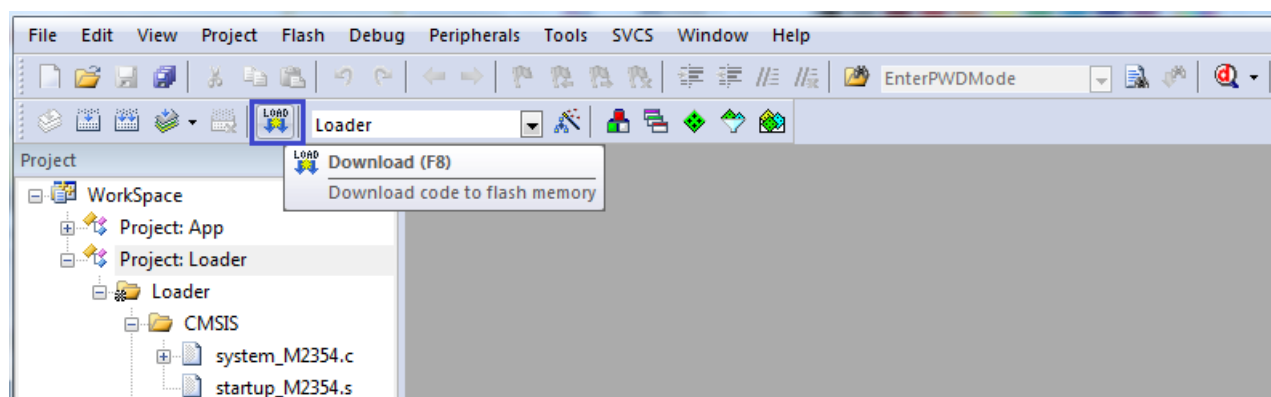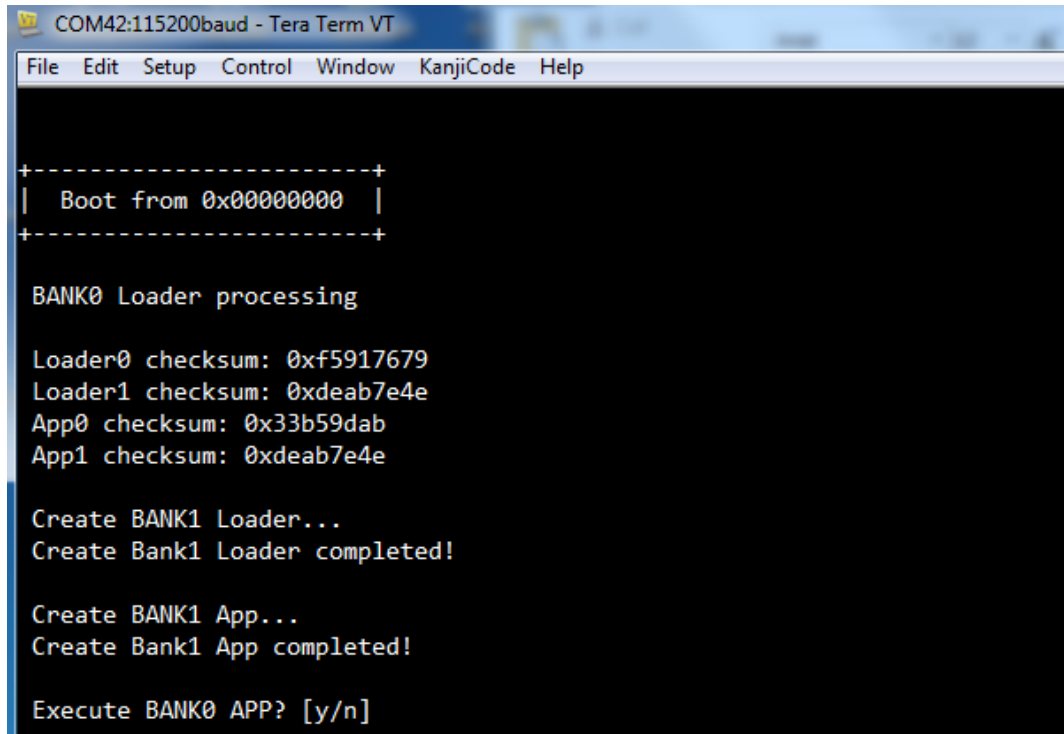
Then select the App target. As shown in the figure below:
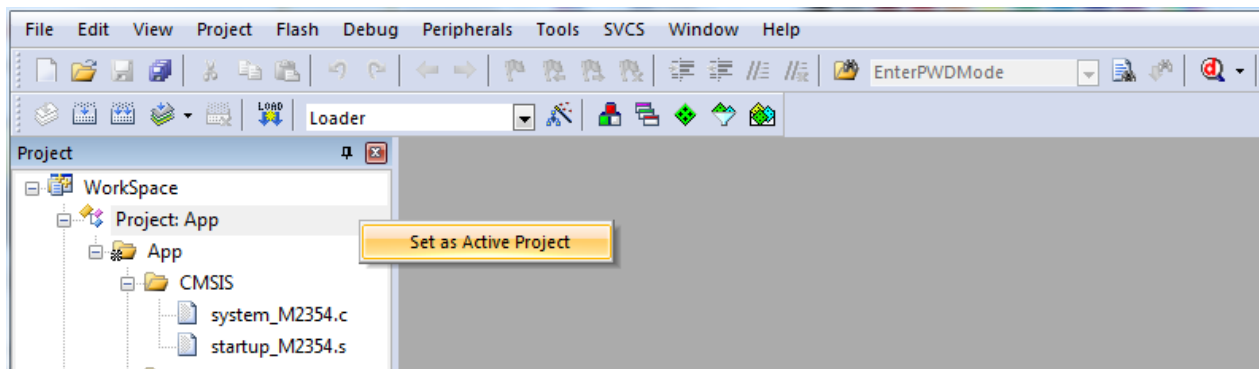
After compiling done, click the "LOAD" button to load the App into the Bank0 App execution area. As shown in the figure below:

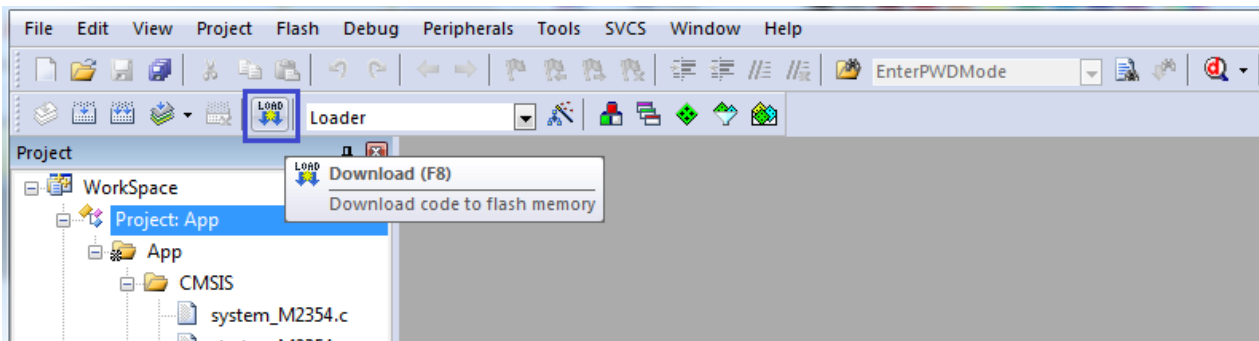After the two programs being downloaded, press the reset button on the M2354 to start the system. When the system is started for the first time, it will create Bank1 loader and Bank1 App by copying Bank0 Loader and Bank0 App. As shown in the figure below:

After restarting the system, Bank0 and Bank1 will have the same loader and app. Bank0's Loader is defined as Loader0 while Bank1's Loader is defined as Loader1; Bank0's App is defined as App0 while Bank1's App is defined as App1. Loader0 and Loader1 have the same checksum value while App0 and App1 have the same checksum value. As shown in the following figure:

Then introduce how the Bank Swap function works under such framework. When the system is started, a dialogue message will appear to let the user decide whether to execute Bank0's firmware (Active firmware). As shown below:

```
+----------------------+
|  Boot from 0x00000000 |
+----------------------+

 BANK0 Loader processing

 Loader0 checksum: 0xf5917679
 Loader1 checksum: 0xf5917679
 App0 checksum: 0x33b59dab
 App1 checksum: 0x33b59dab

 Execute BANK0 APP? [y/n]
```

When user selects (n) not to execute Bank0's firmware, a dialog for executing Bank Swap will appear. As shown below:

```
 Loader0 checksum: 0xf5917679
 Loader1 checksum: 0xf5917679
 App0 checksum: 0x33b59dab
 App1 checksum: 0x33b59dab

 Execute BANK0 APP? [y/n]

 Swap to BANK1 Loader? [y/n]
```

When user selects (y) to execute Bank Swap, CPU will immediately switch to Bank1 and execute Bank1 Loader. As shown below:

```
+----------------------+
|  Boot from 0x00000000 |
+----------------------+

 BANK1 Loader processing

 Loader0 checksum: 0xf5917679
 Loader1 checksum: 0xf5917679
 App0 checksum: 0x33b59dab
 App1 checksum: 0x33b59dab

 Execute BANK1 APP? [y/n]
```

At this time, the flow executed in Bank1 Loader is similar to the execution of Bank0 Loader, and it can be used to select whether to execute the Bank1's App. When user selects (n) not to execute Bank1's firmware, a dialog for executing Bank Swap will appear. As shown below:

```
Loader0 checksum: 0xf5917679
Loader1 checksum: 0xf5917679
App0 checksum: 0x33b59dab
App1 checksum: 0x33b59dab

Execute BANK1 APP? [y/n]

Swap to BANK0 Loader? [y/n]
```

When user selects (execute Bank Swap, the CPU y) to will immediately switch back to Bank0 and execute Bank0 Loader. As shown below:

```
+-----------------------+
|  Boot from 0x00000000 |
+-----------------------+

 BANK0 Loader processing

 Loader0 checksum: 0xf5917679
 Loader1 checksum: 0xf5917679
 App0 checksum: 0x33b59dab
 App1 checksum: 0x33b59dab

 Execute BANK0 APP? [y/n]
```

Repeat the above steps, user can switch between Bank0 and Bank1, to verify whether the Bank Swap function is normal.

Next, it will introduce how to execute firmware upgrade process. First, the system starts to execute Bank0 loader, as shown in the following figure:

```
+-----------------------+
|  Boot from 0x00000000 |
+-----------------------+

 BANK0 Loader processing

 Loader0 checksum: 0xf5917679
 Loader1 checksum: 0xf5917679
 App0 checksum: 0x33b59dab
 App1 checksum: 0x33b59dab

 Execute BANK0 APP? [y/n]
```

At this time, user can select (y) to execute Bank0 firmware. As shown below:

```
+-----------------------+
|  Boot from 0x00010000  |
+-----------------------+

BANK0 APP processing

Download new FW?[y/n]
```

Then user can see the message "Boot from "0x10000" and "BANK0 APP processing". Then a selection dialog will appear, letting the user decide whether to do firmware upgrade process. When user selects (y) to execute the firmware upgrade, the Xmodem transmission start character 'C' will appear, as shown below:

```
+-----------------------+
|  Boot from 0x00010000  |
+-----------------------+

BANK0 APP processing

Download new FW?[y/n]

Bank0 processing, downloaad data to Bank1.
CCCCCCCCCC
```

Then select "File→Transfer→XMODOM→Send" in the UART window to start Xmodem transmission, as shown below:
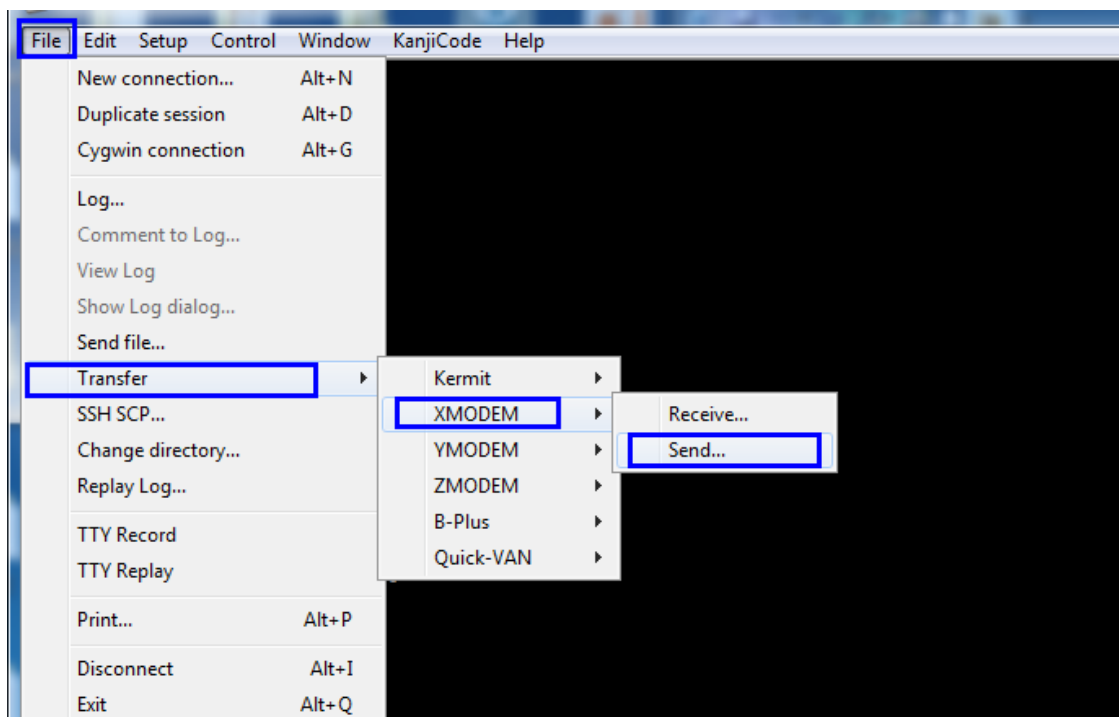
Then a window of XMODEM Send will appear, select NewFirmwareSample.bin (located in \bsp\SampleCode\StdDriver\FMC_DualBankFwUpgrade) provided in Sample code in this window, as shown below:
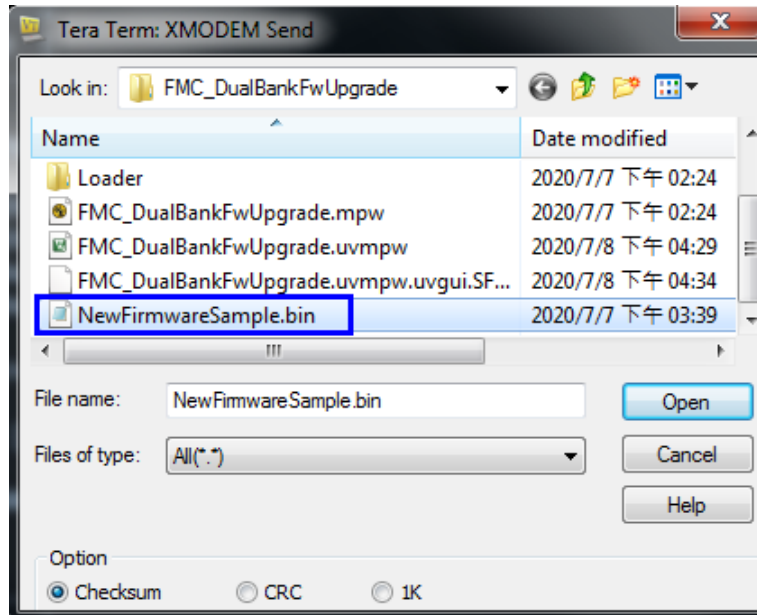
After double-clicking the bin file, the file starts to transfer, as shown in the following figure:

After the transfer being completed, return to the original debug window, and the message "Firmware download completed!!" will appear, indicating that the firmware update is complete. As shown below:

```
+-----------------------+
|  Boot from 0x00010000 |
+-----------------------+

 BANK0 APP processing

 Download new FW?[y/n]

 Bank0 processing, downloaad data to Bank1.
CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC
CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC
 transfer done!
Total trnasfer size is 7552

 Firmware download completed!!
```

Then it will return to the screen of Bank0 firmware execution, as shown in the following figure:
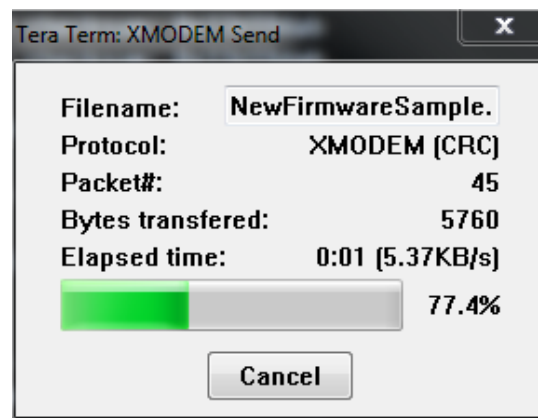
```
+-----------------------+
|  Boot from 0x00010000 |
+-----------------------+

 BANK0 APP processing

 Download new FW?[y/n]
```

At this time, the new version of firmware is placed in Bank1 App base, so if user wants to execute the new firmware, the (n) should be selected that the system will return to the Bank0 Loader for execution. As shown below:

```
+-----------------------+
|  Boot from 0x00000000 |
+-----------------------+

 BANK0 Loader processing

 Loader0 checksum: 0xf5917679
 Loader1 checksum: 0xf5917679
 App0 checksum: 0x33b59dab
 App1 checksum: 0x037693dd

 Execute BANK0 APP? [y/n]
```

Then select (n) not to execute Bank0 firmware, as shown in the following figure:

```
BANK0 Loader processing

Loader0 checksum: 0xf5917679
Loader1 checksum: 0xf5917679
App0 checksum: 0x33b59dab
App1 checksum: 0x037693dd

Execute BANK0 APP? [y/n]

Swap to BANK1 Loader? [y/n]
```

Then select (y) to switch the system to Bank1 Loader, as shown below:

```
+----------------------+
|  Boot from 0x00000000  |
+----------------------+

BANK1 Loader processing

Loader0 checksum: 0xf5917679
Loader1 checksum: 0xf5917679
App0 checksum: 0x33b59dab
App1 checksum: 0x037693dd

Execute BANK1 APP? [y/n]
```

Finally, select (y) to execute the program in Bank1 App base, which is the new version of firmware. as shown in the following figure:

```
+----------------------+
|  Boot from 0x00010000  |
+----------------------+

New firmware processing

Download new FW?[y/n]
```

Revision History

Date	Revision	Description
2020.07.10	1.00	1. Initially issued.

Important Notice

Nuvoton Products are neither intended nor warranted for usage in systems or equipment, any malfunction or failure of which may cause loss of human life, bodily injury or severe property damage. Such applications are deemed, "Insecure Usage".

Insecure usage includes, but is not limited to: equipment for surgical implementation, atomic energy control instruments, airplane or spaceship instruments, the control or operation of dynamic, brake or safety systems designed for vehicular use, traffic signal instruments, all types of safety devices, and other applications intended to support or sustain life.

All Insecure Usage shall be made at customer's risk, and in the event that third parties lay claims to Nuvoton as a result of customer's Insecure Usage, customer shall indemnify the damages and liabilities thus incurred by Nuvoton.