


Company name: Podno grejanje

Created by: Phone: Fax:

Date: 19.02.2015

D	V-I
Description	Value
Product name:	UPS 25-60 130
Product No:	59526500
EAN number:	5708601064685
Technical:	
Speed no:	3
Head max:	60 dm
TF class:	110
Approvals on nameplate:	VDE,GS,CE
Materials:	
Material, pump housing:	Cast iron
	EN-JL1030 DIN WNr.
	30 B ASTM
Material, impeller:	Composite, PES/PP
<u> </u>	
Installation: Amb. max at 80 dgr C liquid:	80 °C
Maximum operating pressure:	10 bar
Size, pipe connection:	G 1 1/2
Pressure stage, pipe connec.:	PN 10
Port-to-port length:	130 mm
Liquid:	
Maximum liquid temperature:	110 °C
Electrical data:	
Power input speed 1:	45 W
Power input speed 2:	65 W
Max. power input:	90 W
Mains frequency:	50 Hz
Rated voltage:	1 x 230 V
Current in speed 1:	0.2 A
Current in speed 2:	0.3 A
Max. current:	0.4 A
Capacitor size - run:	2.5 µF
Enclosure class (IEC 34-5):	IP44
Insulation class (IEC 85):	Н
Motor protec:	NONE
Thermal protec:	IMP.
Controls:	
Pos term box:	9H
FUS LEITH DUX.	3П
Others:	
Net weight:	2.4 kg
	2.6 kg
Gross weight:	2.0 kg

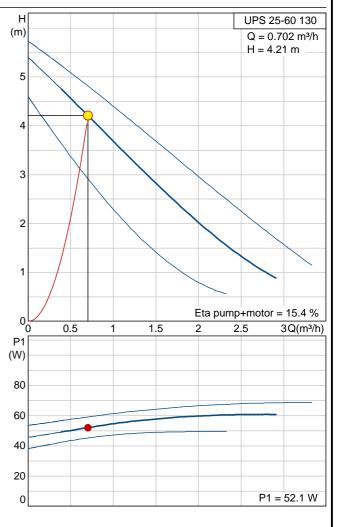

Printed from Grundfos CAPS 1/1