




Ansicht Nord 1 : 200



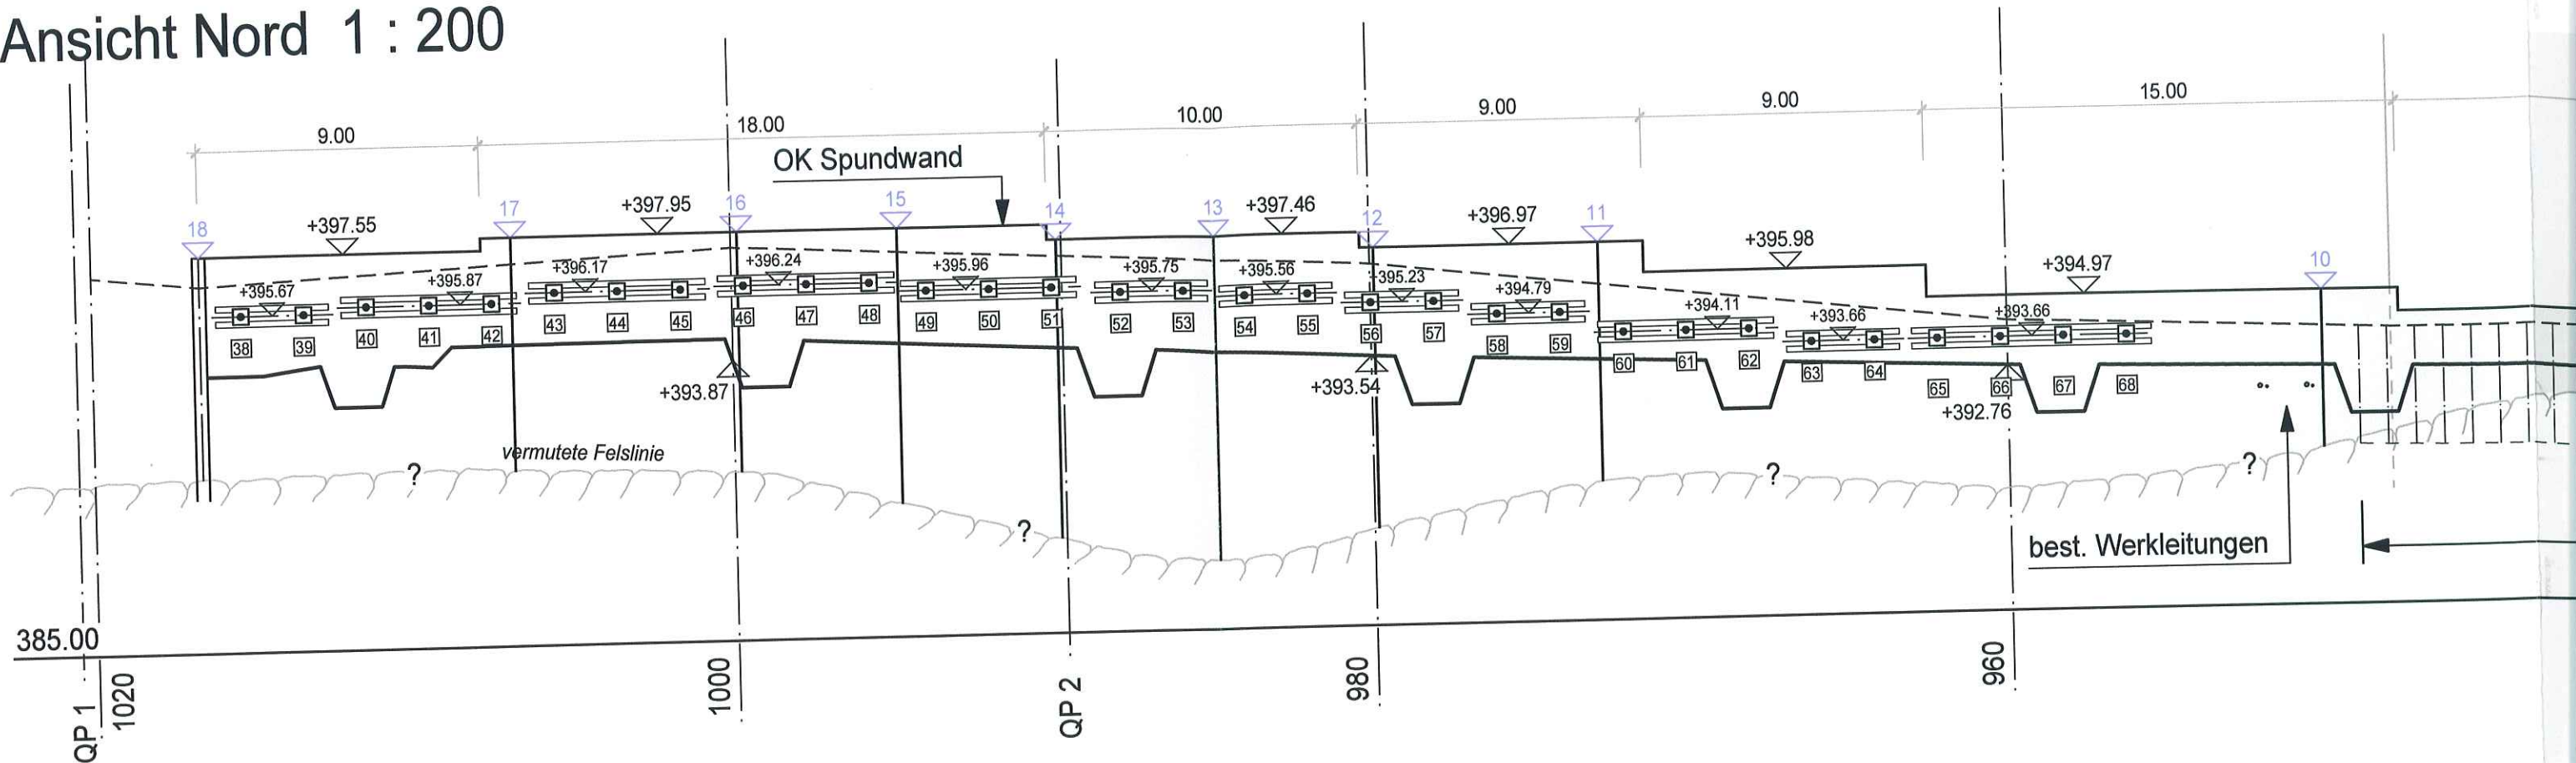


Ansicht Süd 1 : 200

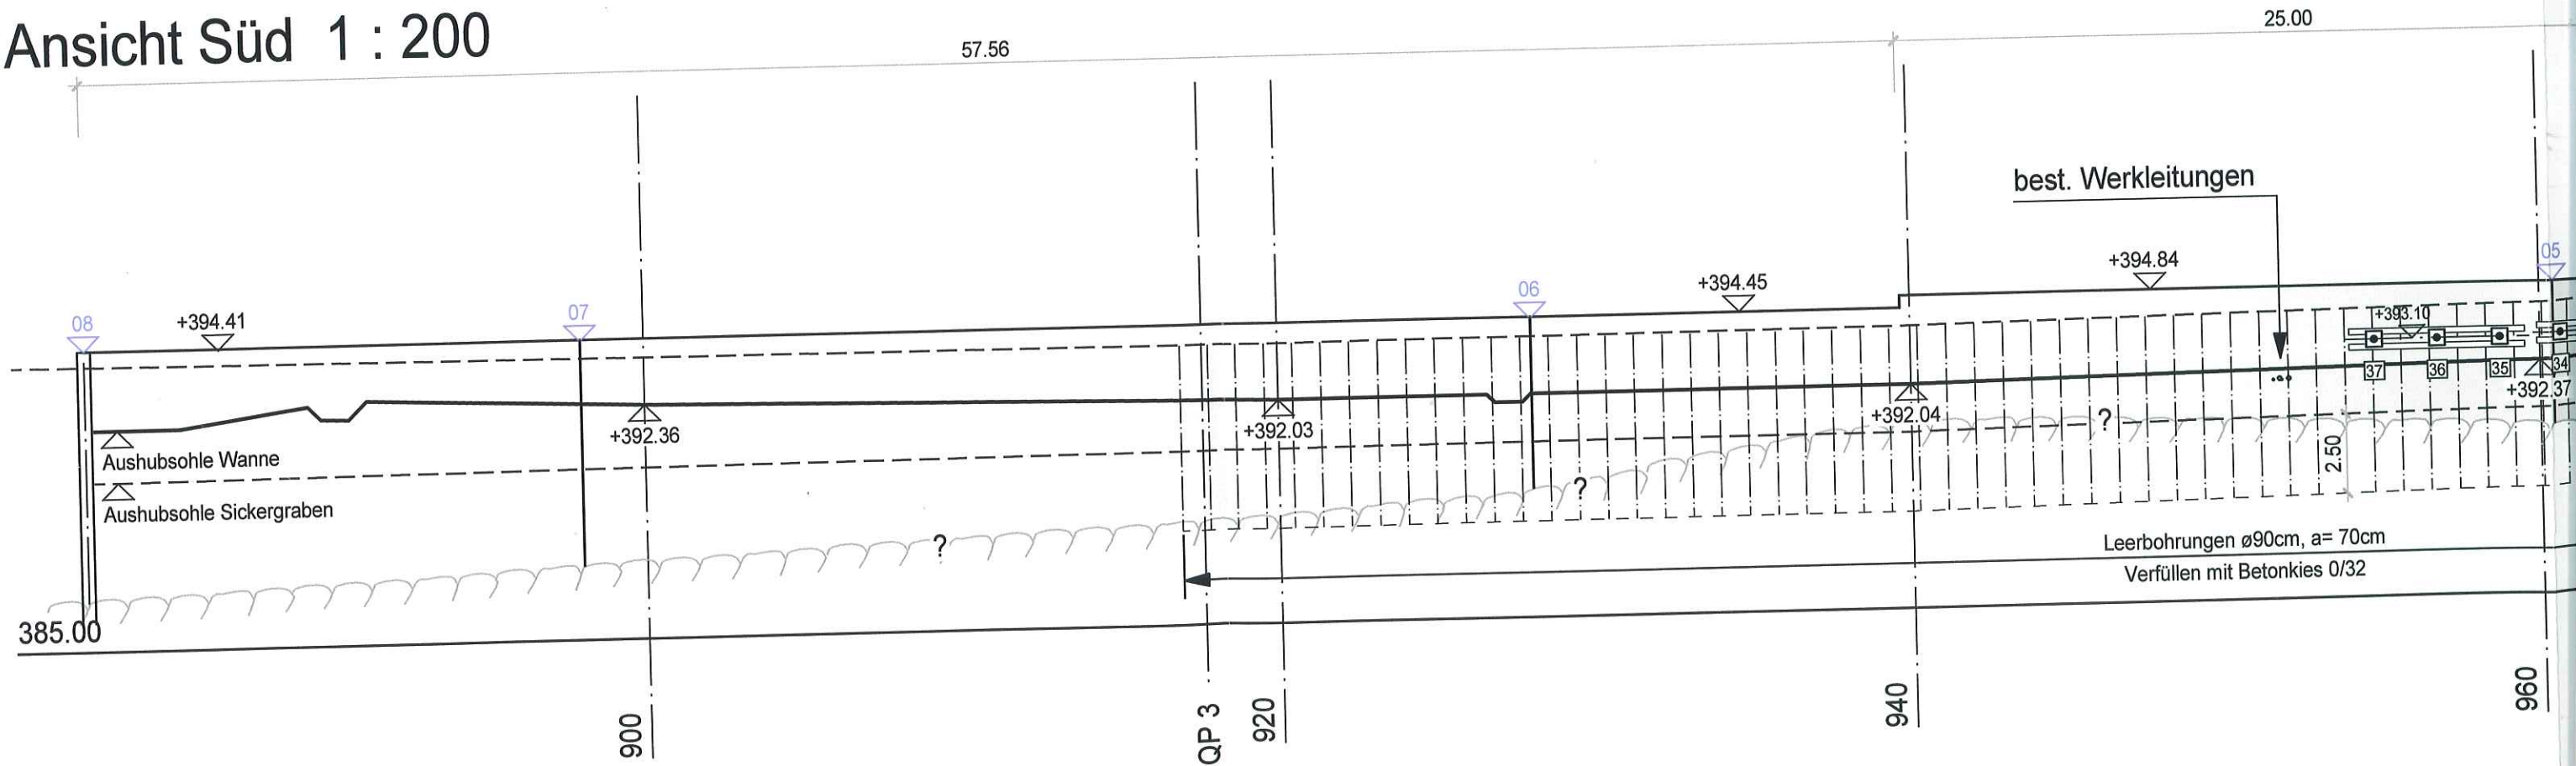

Situation 1 : 200

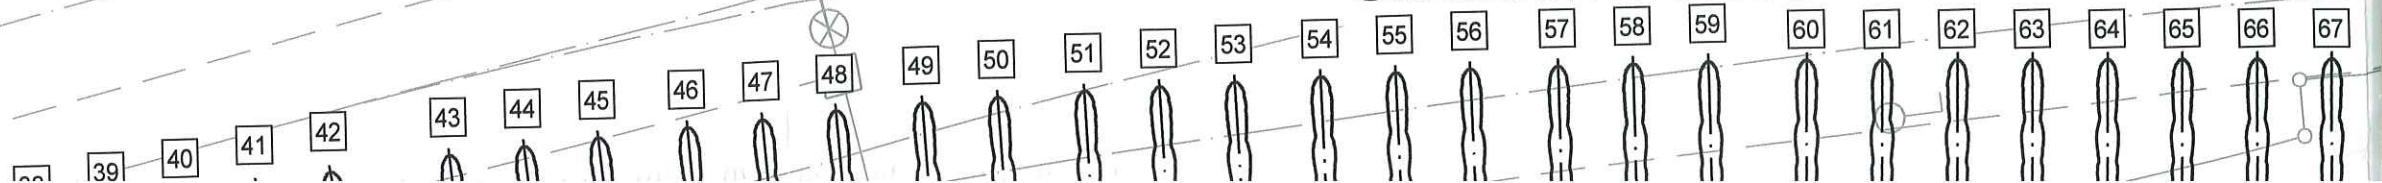

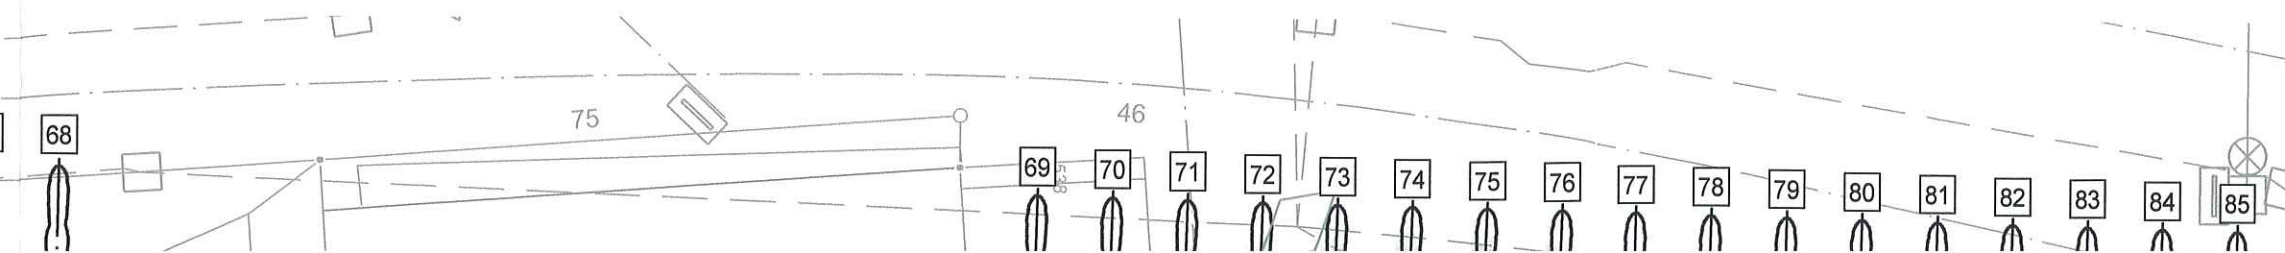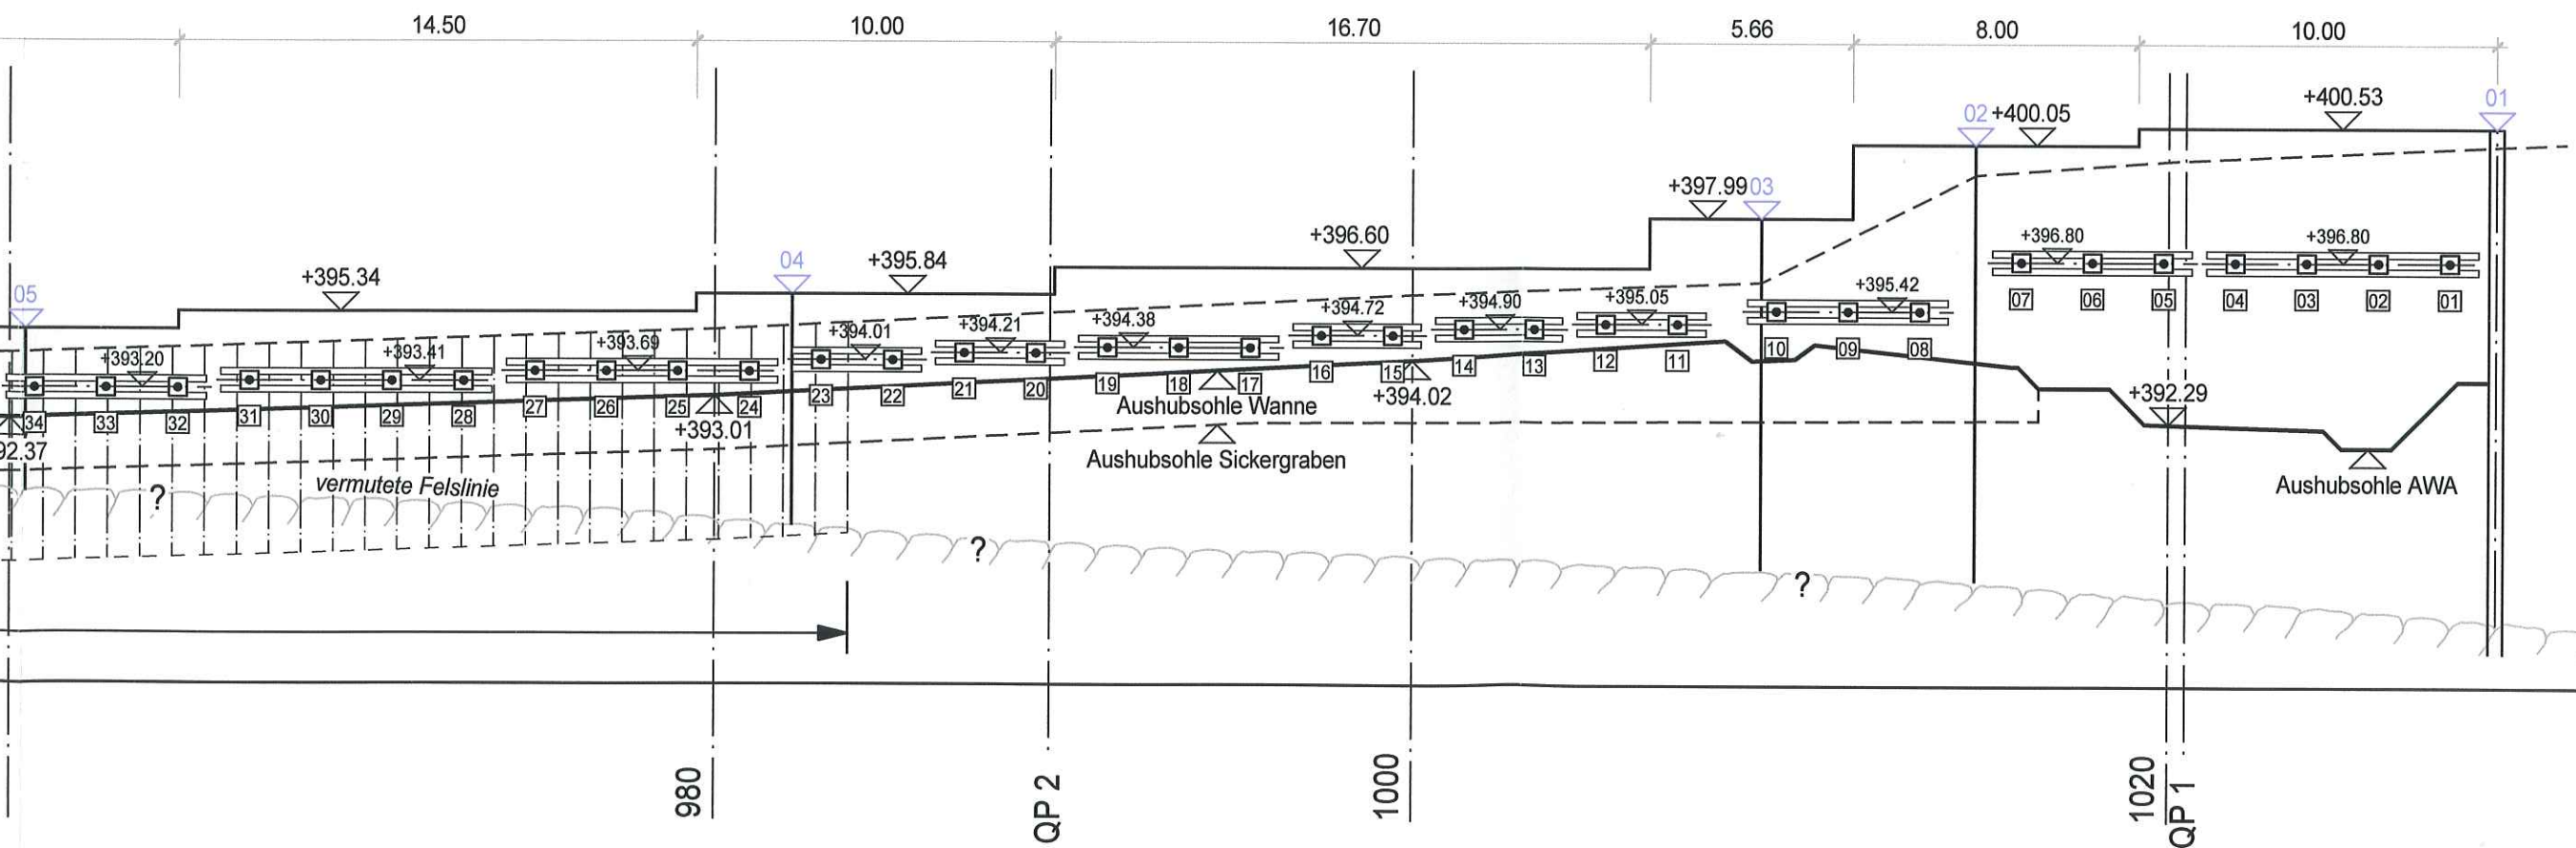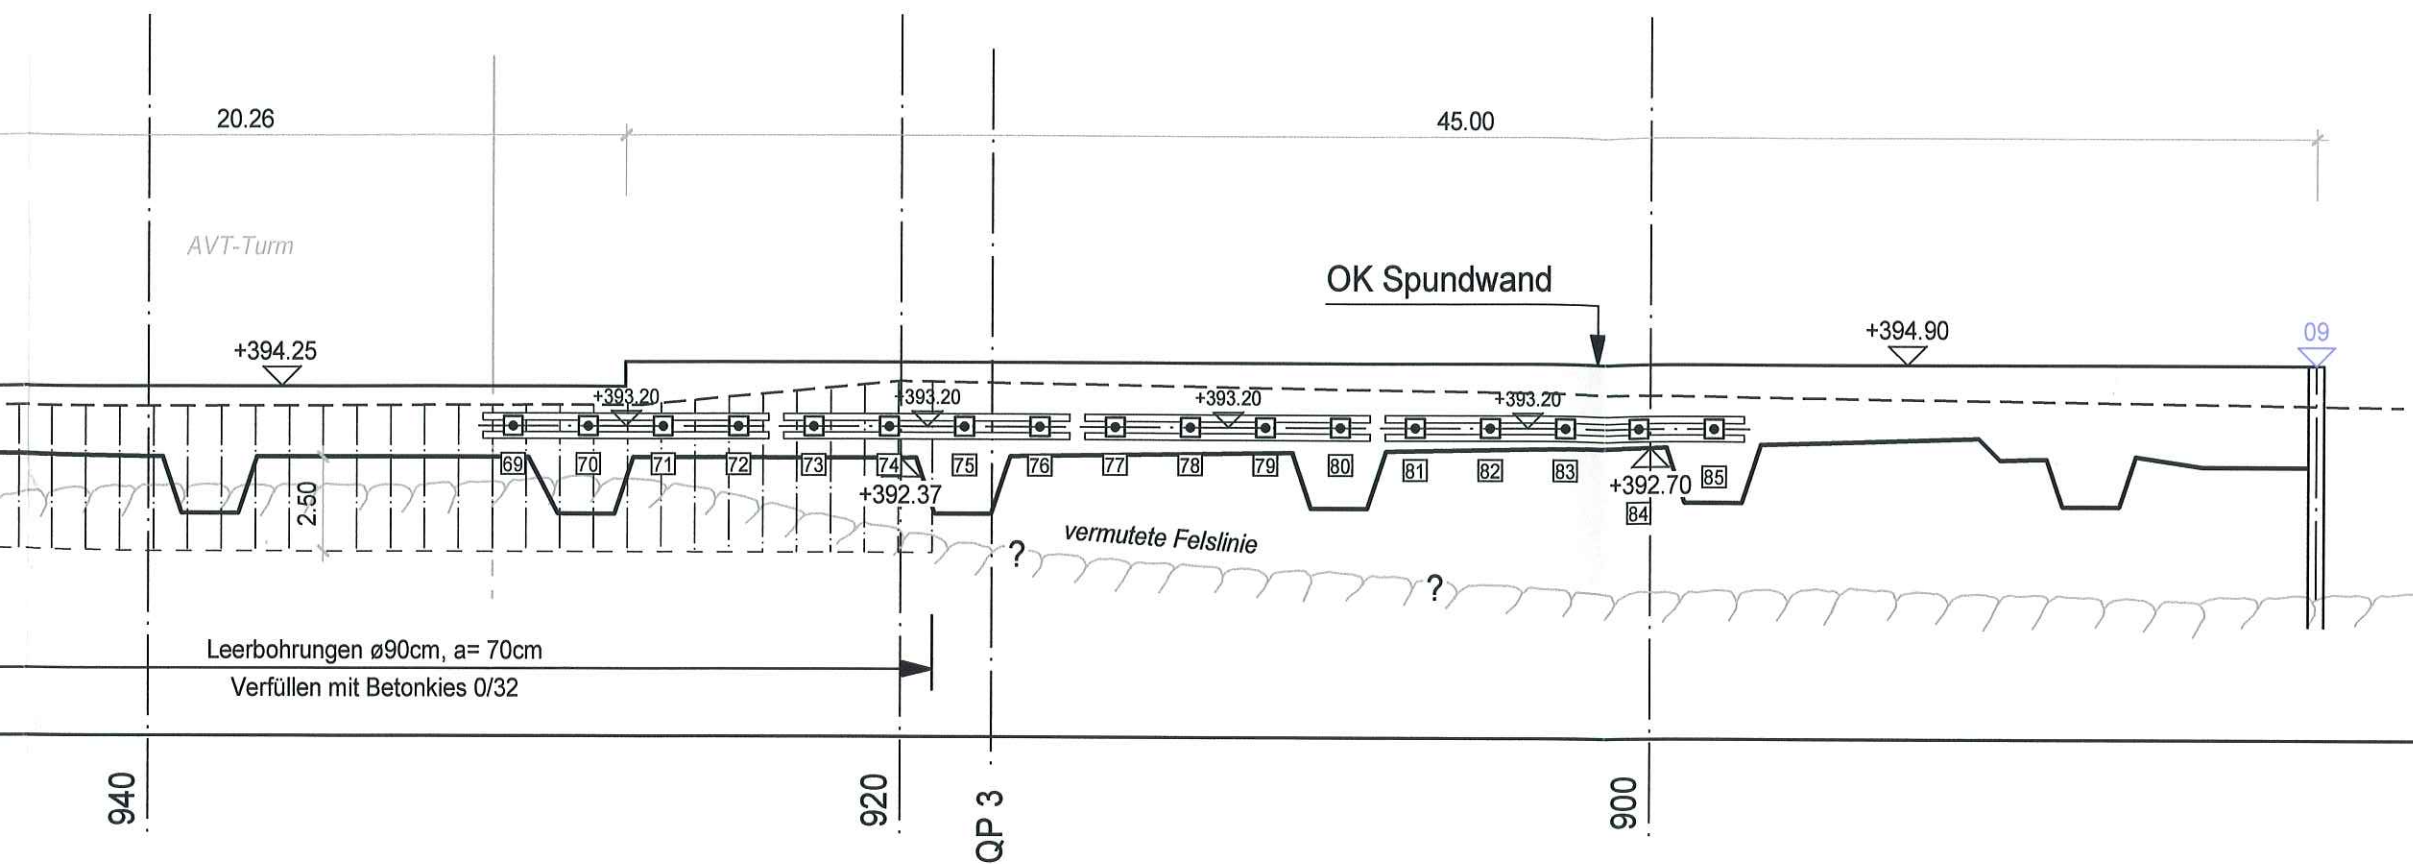

QP 1, 1

proj. Überbauung

390

QP 2, 1


proj. Überbauung

390


QP 3,

389


00 (M 1020.50)

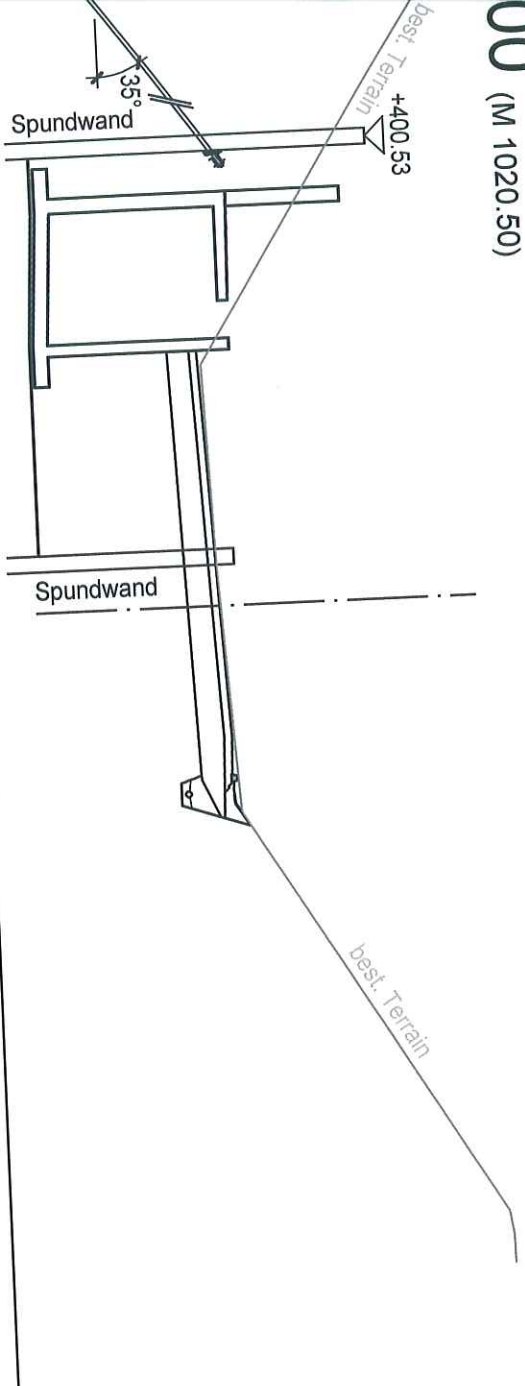

200 (M 989.58)


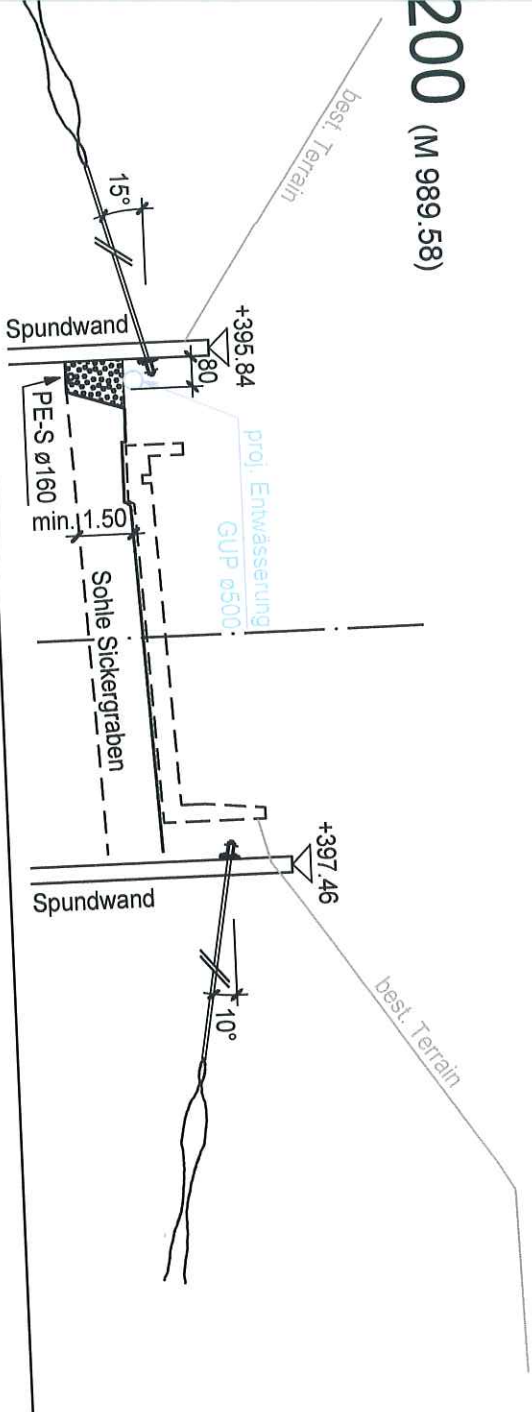


1:200 (M 917.58)

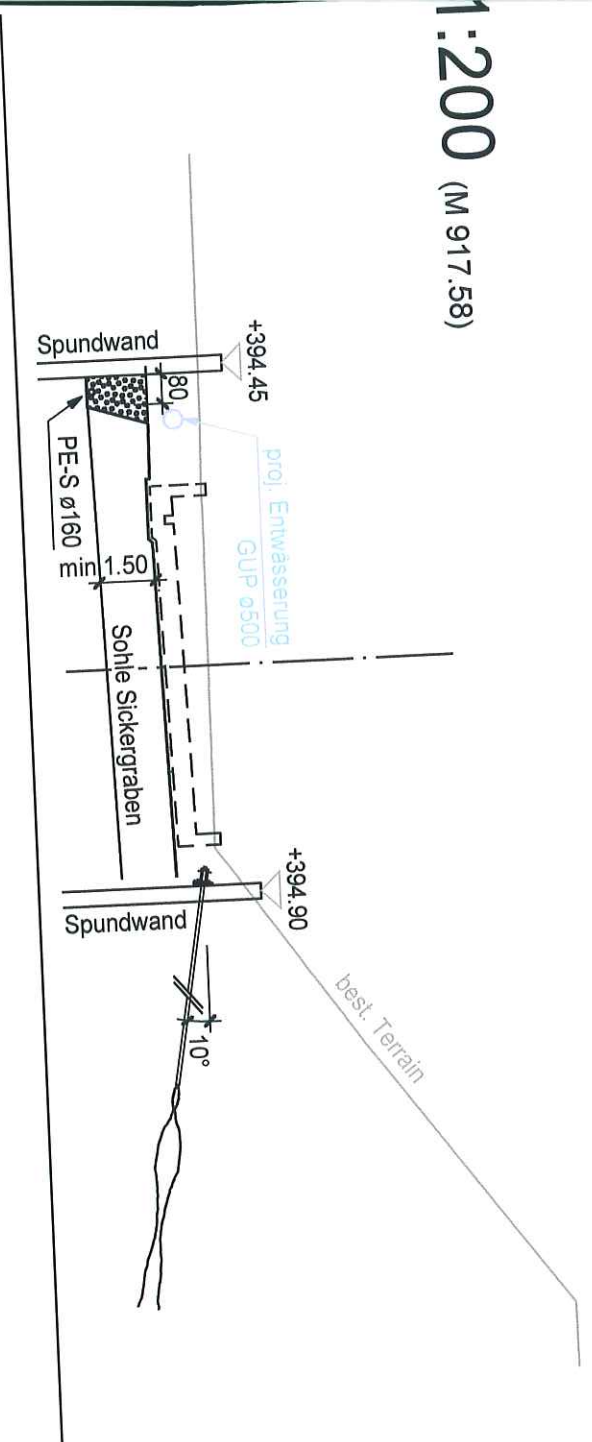



Schnitt A-A 1:100

Schnitt B-B 1:100

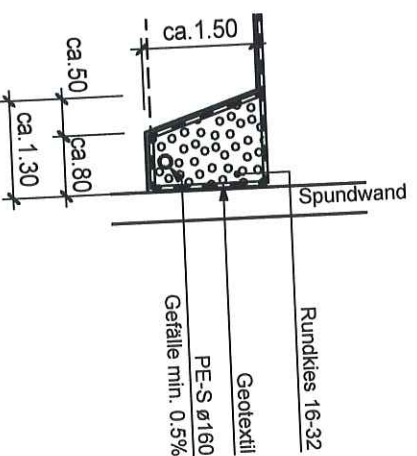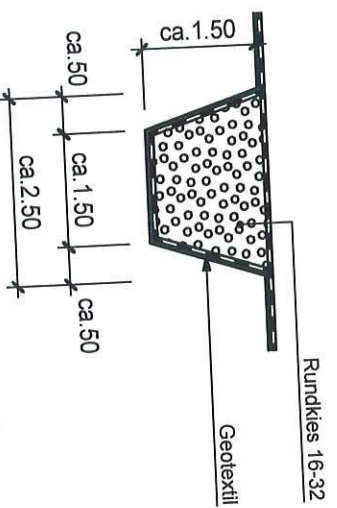

Detail Longarine 1 : 50

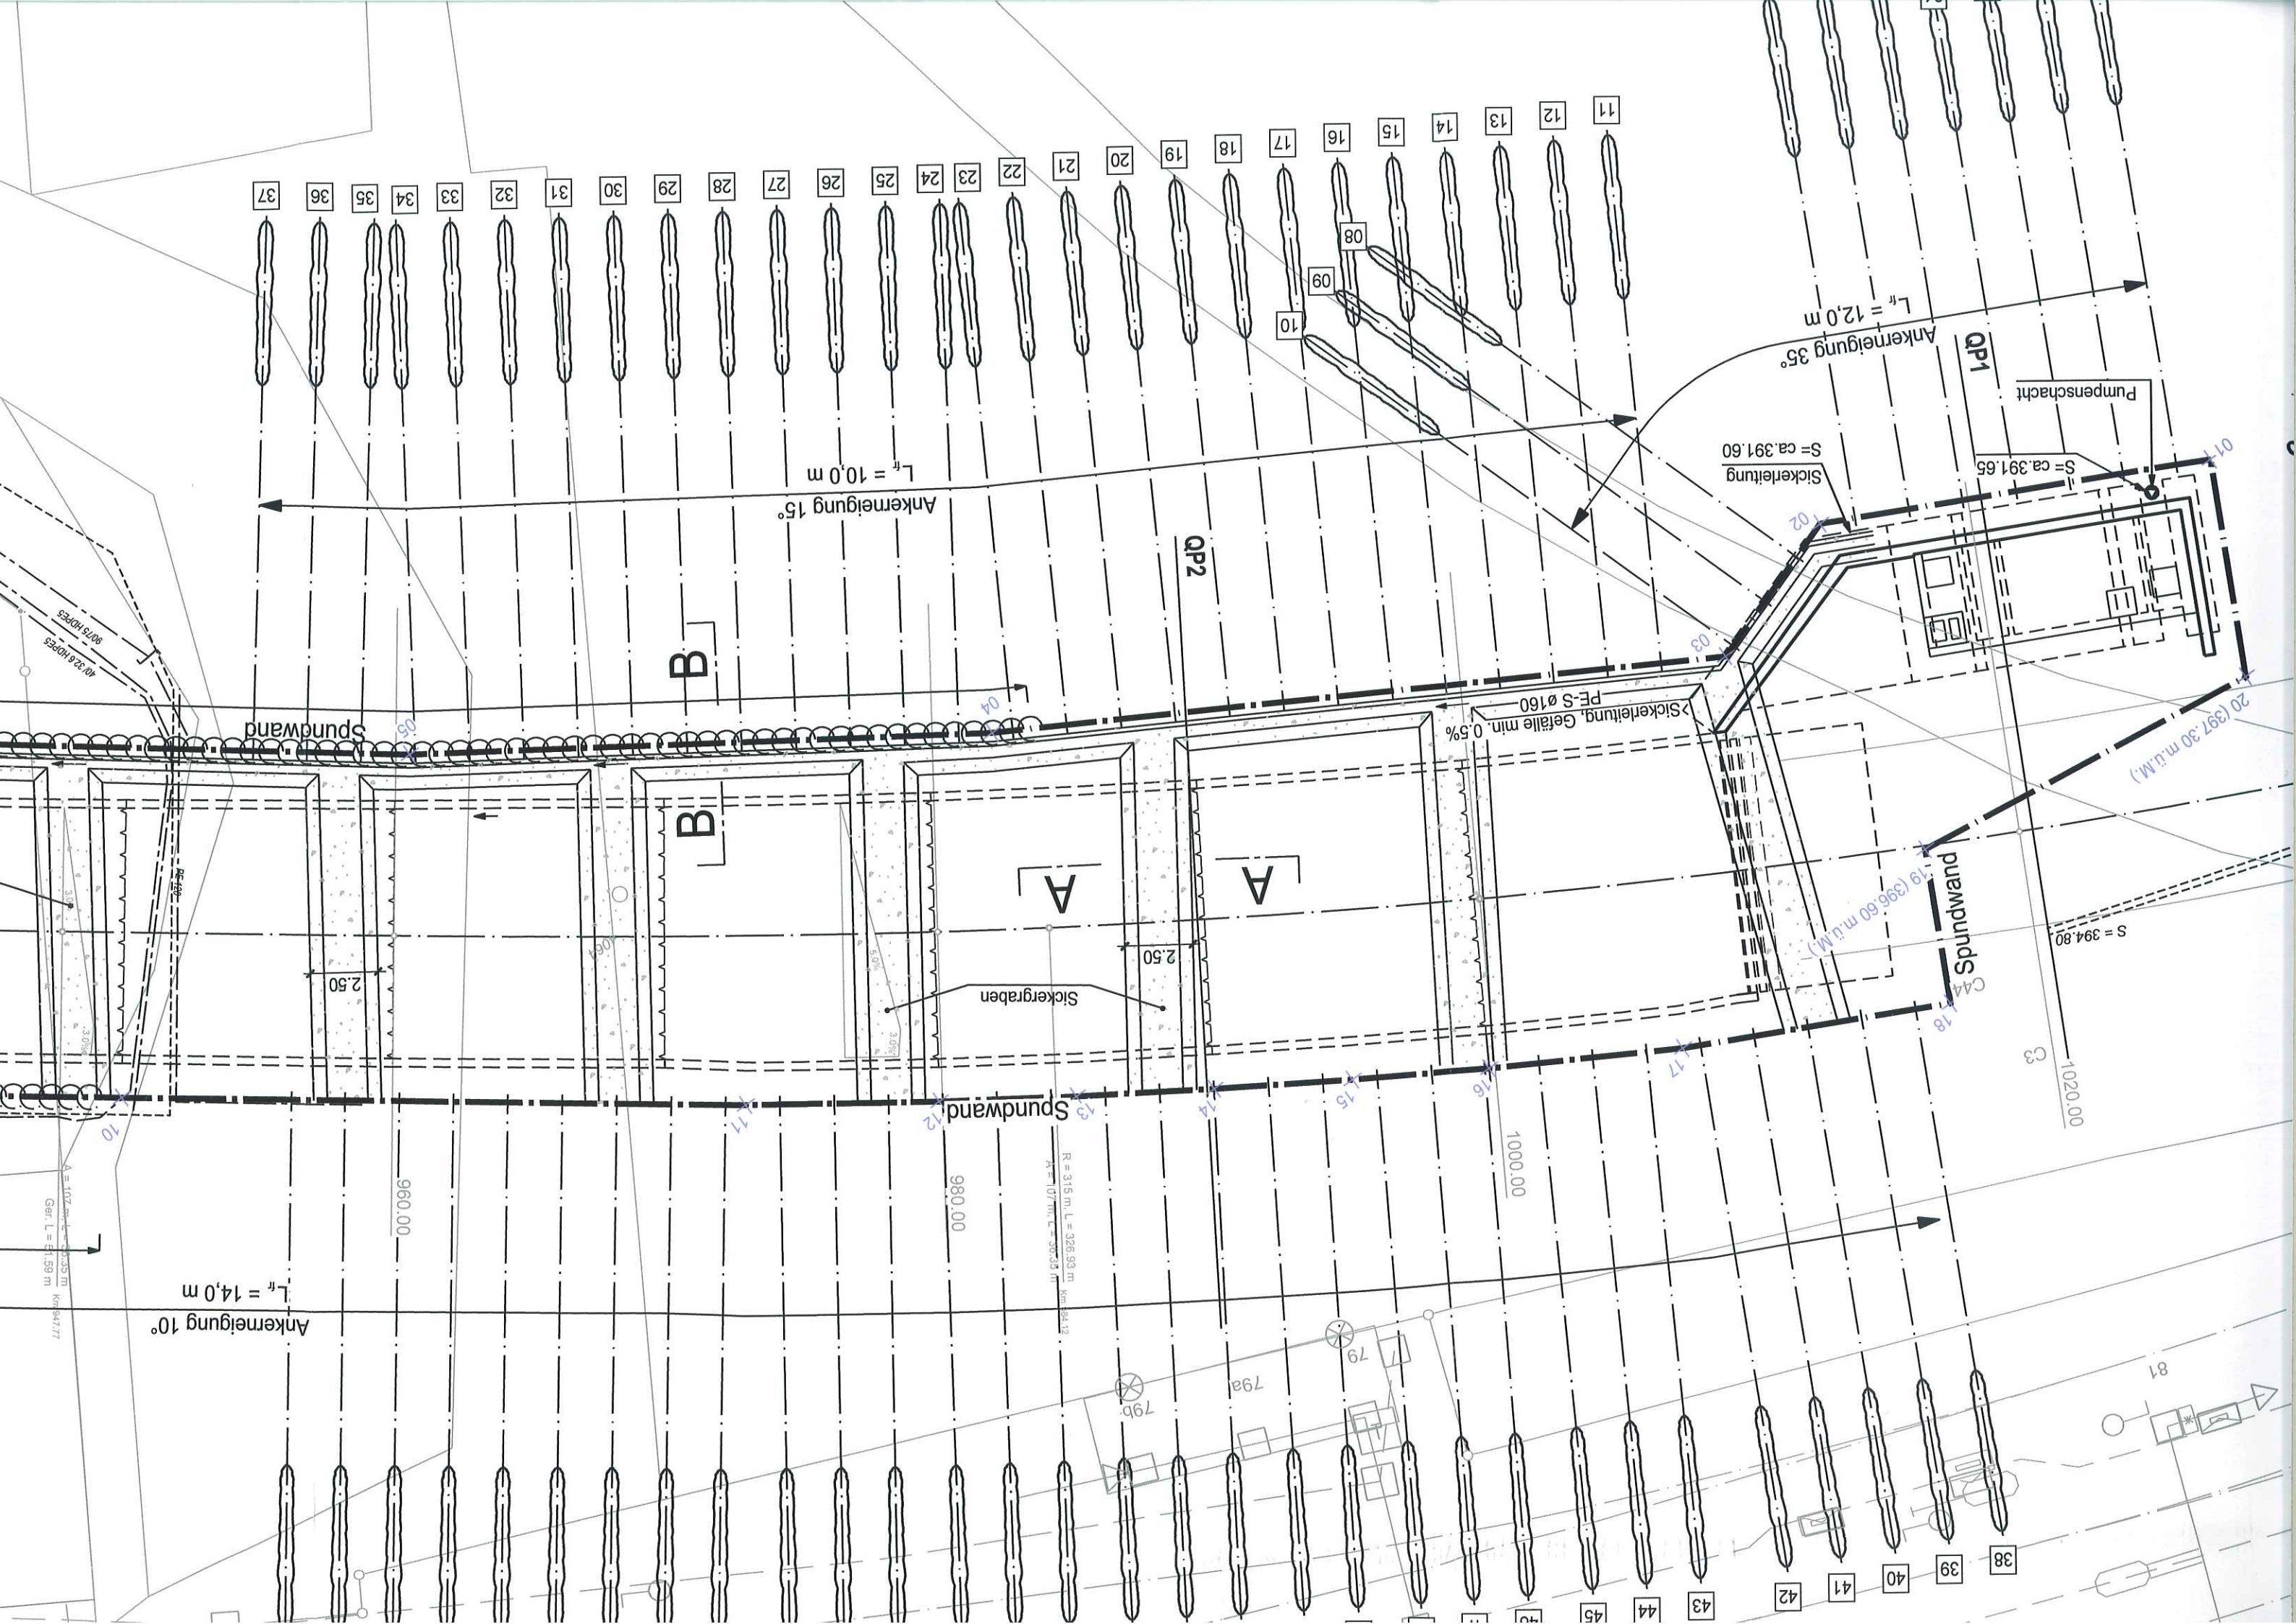

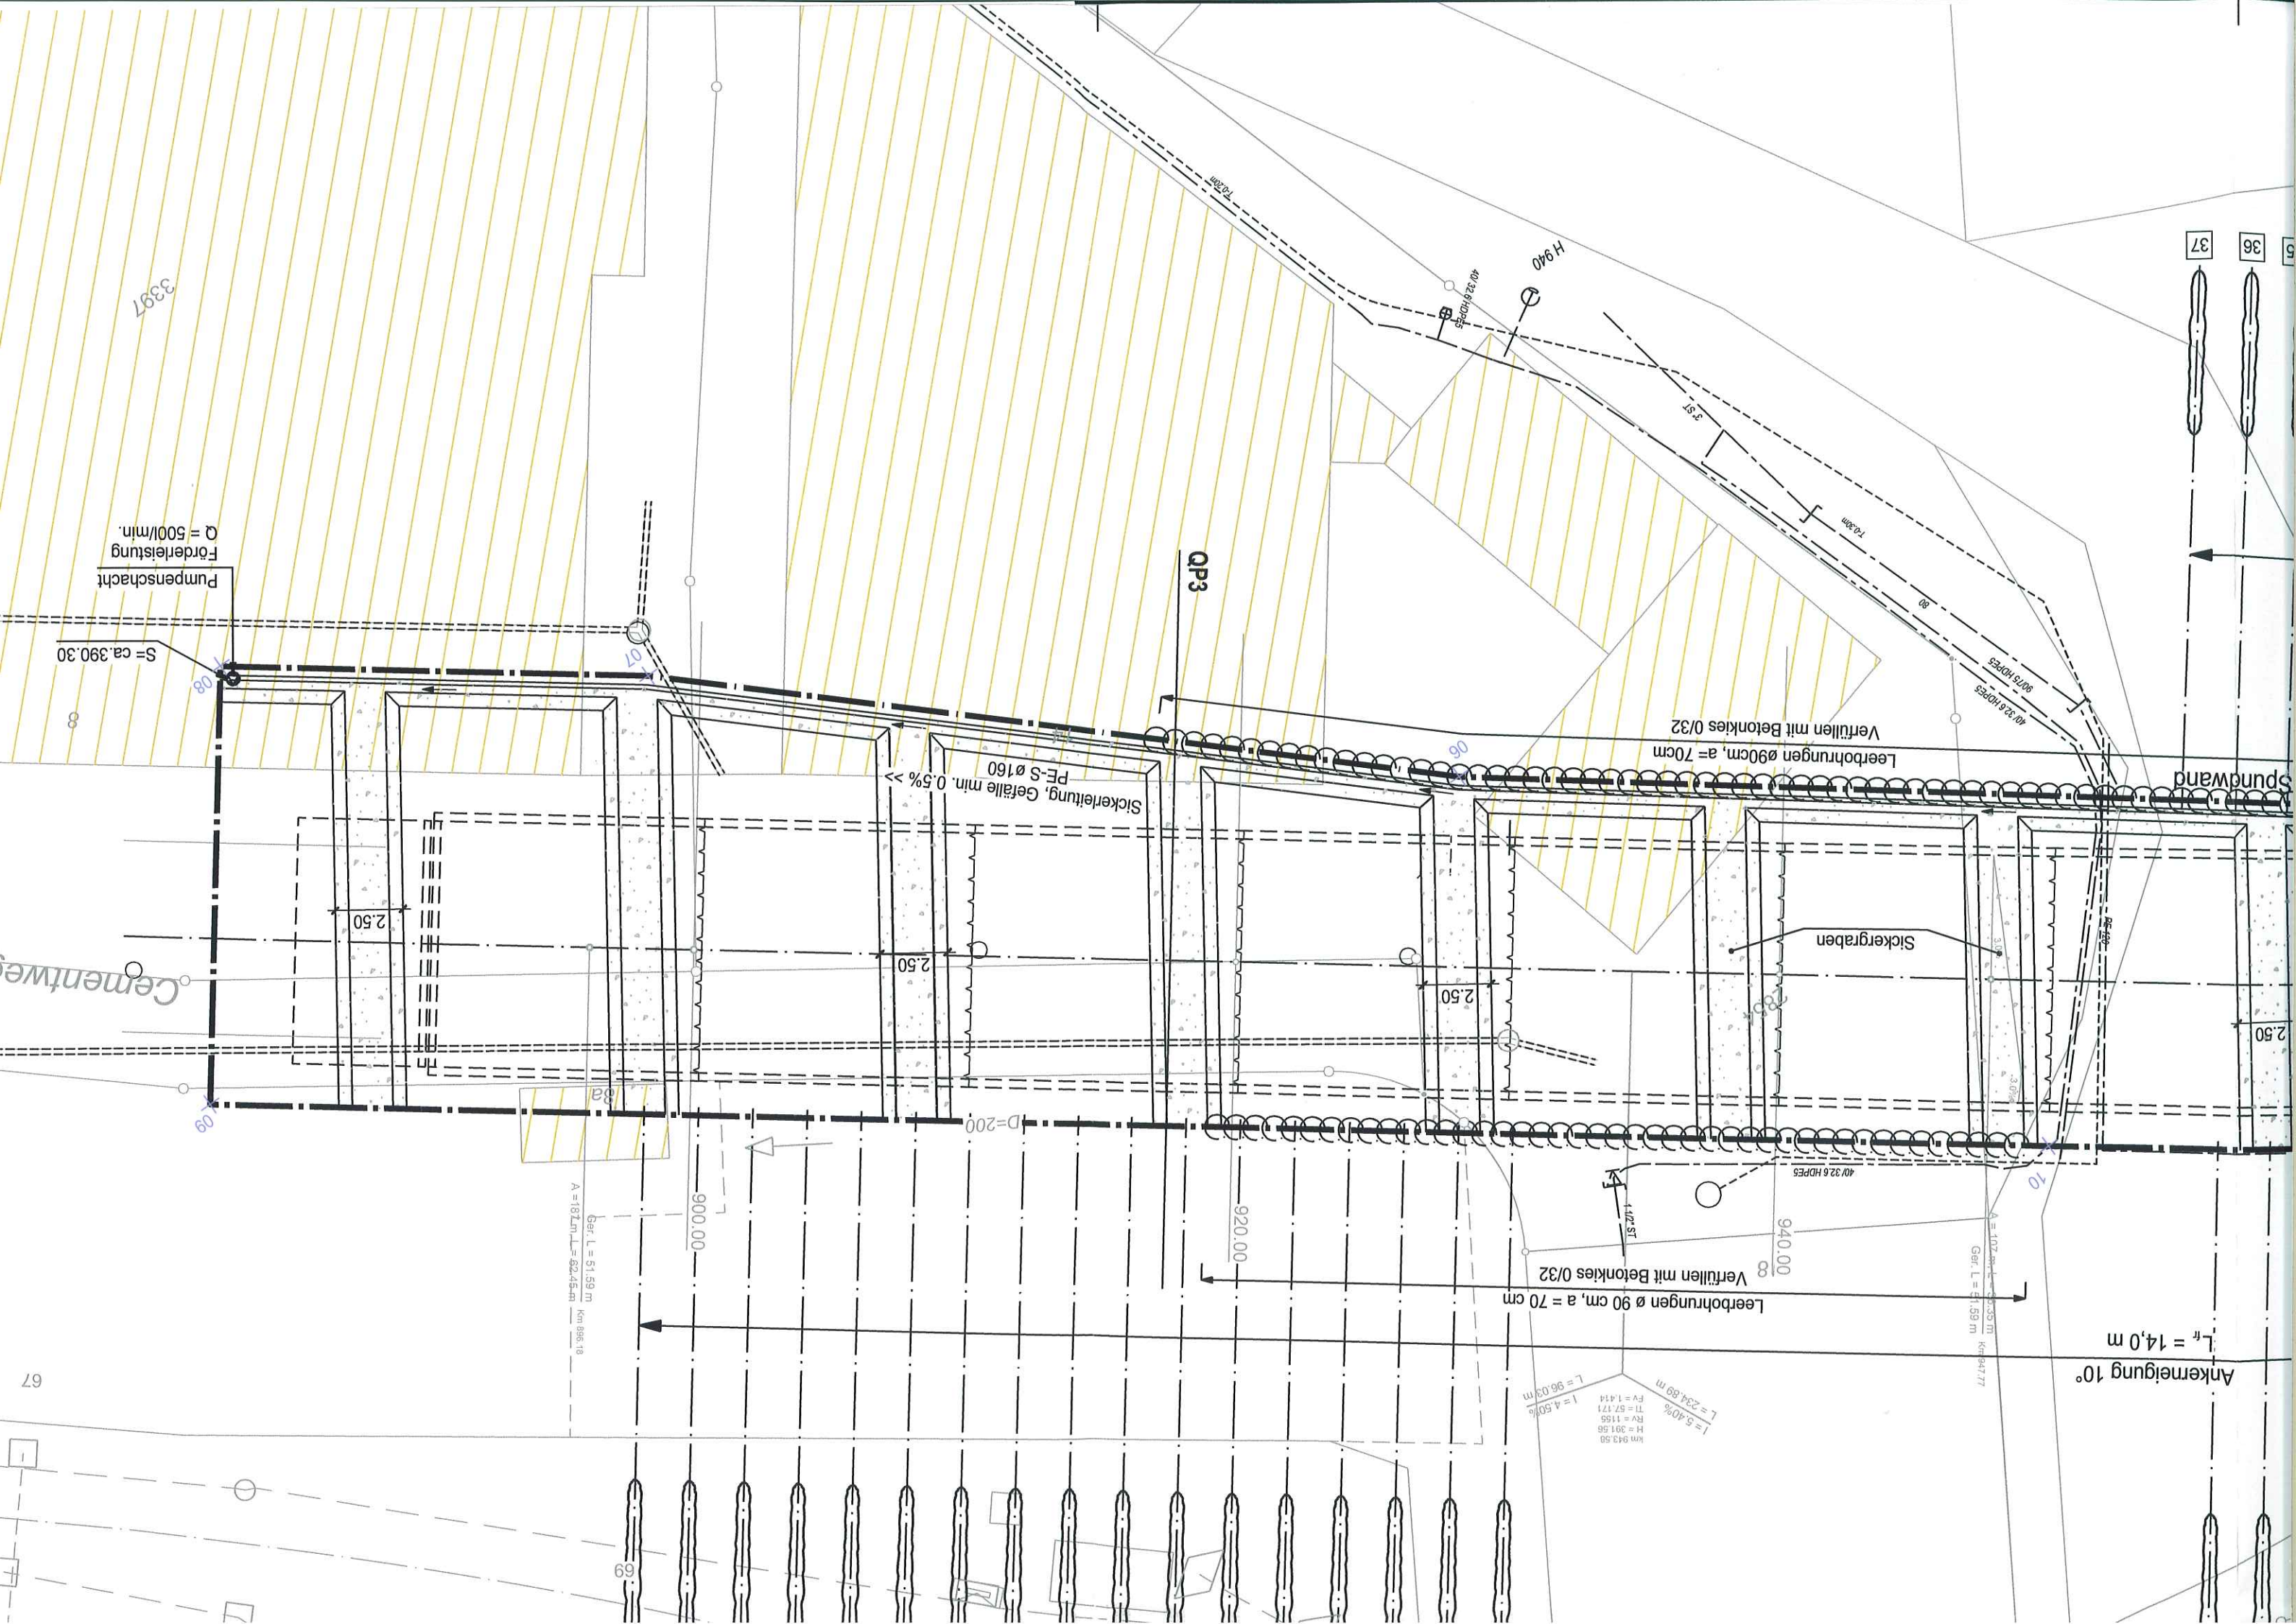

37

36

5

Spundwand

2.50

Ankerneigung 10°
 $L_r = 14,0 \text{ m}$

A = 102,85 m
Ger. L = 51,59 m
Km 947,77

$L = 234,89 \text{ m}$
 $I = 5,40\%$
RV = 1155
H = 301,55
Km 943,50
FV = 1,414
 $L = 96,03 \text{ m}$
 $I = 4,50\%$

Leerbohrungen $\phi 90 \text{ cm}$, $a = 70 \text{ cm}$
Verfüllen mit Betonkies 0/32

940,00

40/32.6 HDPES

Sickergraben

Leerbohrungen $\phi 90 \text{ cm}$, $a = 70 \text{ cm}$
Verfüllen mit Betonkies 0/32

40/32.6 HDPES

10,00m

3,37

H 940

40/32.6 HDPES

QP3

Sickerleitung, Gefälle min. $0,5\%$
PE-S $\phi 160$

2.50

2.50

2.50

Ger. L = 51,59 m
A = 182,1 m
L = 62,45 m
Km 936,18

900,00

D=200

S = ca. 390,30

Pumpenschacht
Förderleistung
 $Q = 500 \text{ l/min}$

3397

69

67