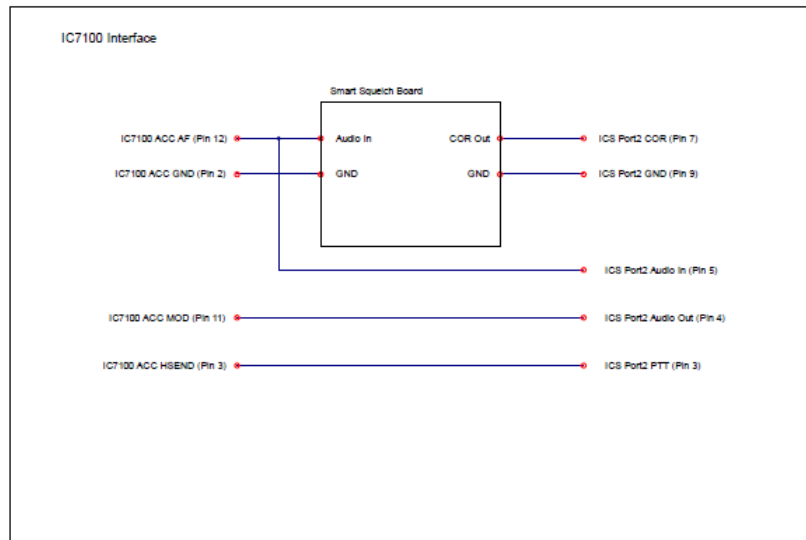# WB6YAZ UHF Repeater / Remote Base
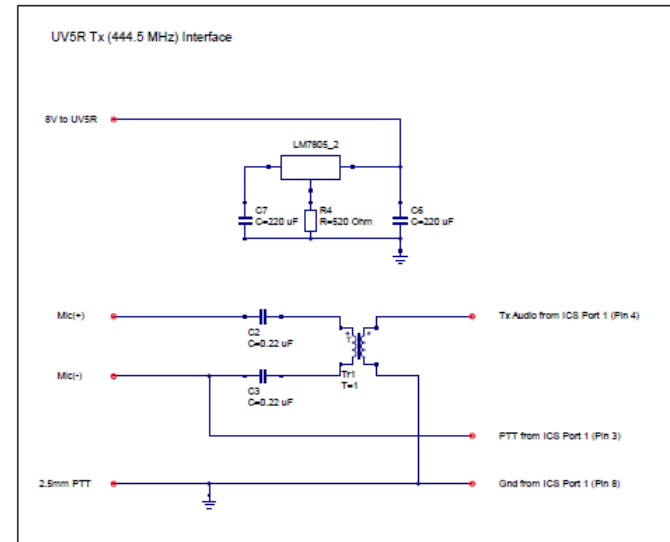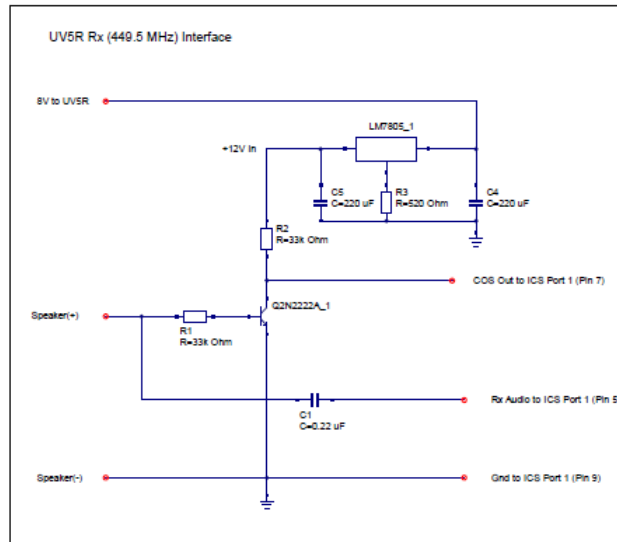
WB6YAZ UHF Repeater / Remote Base

G. Daugherty

WB6YAZ UHF Repeater / Remote Base

JPL Smart Squelch - http://www.repeater-builder.com/projects/jpl-vox-sq/ssb-squelch.html
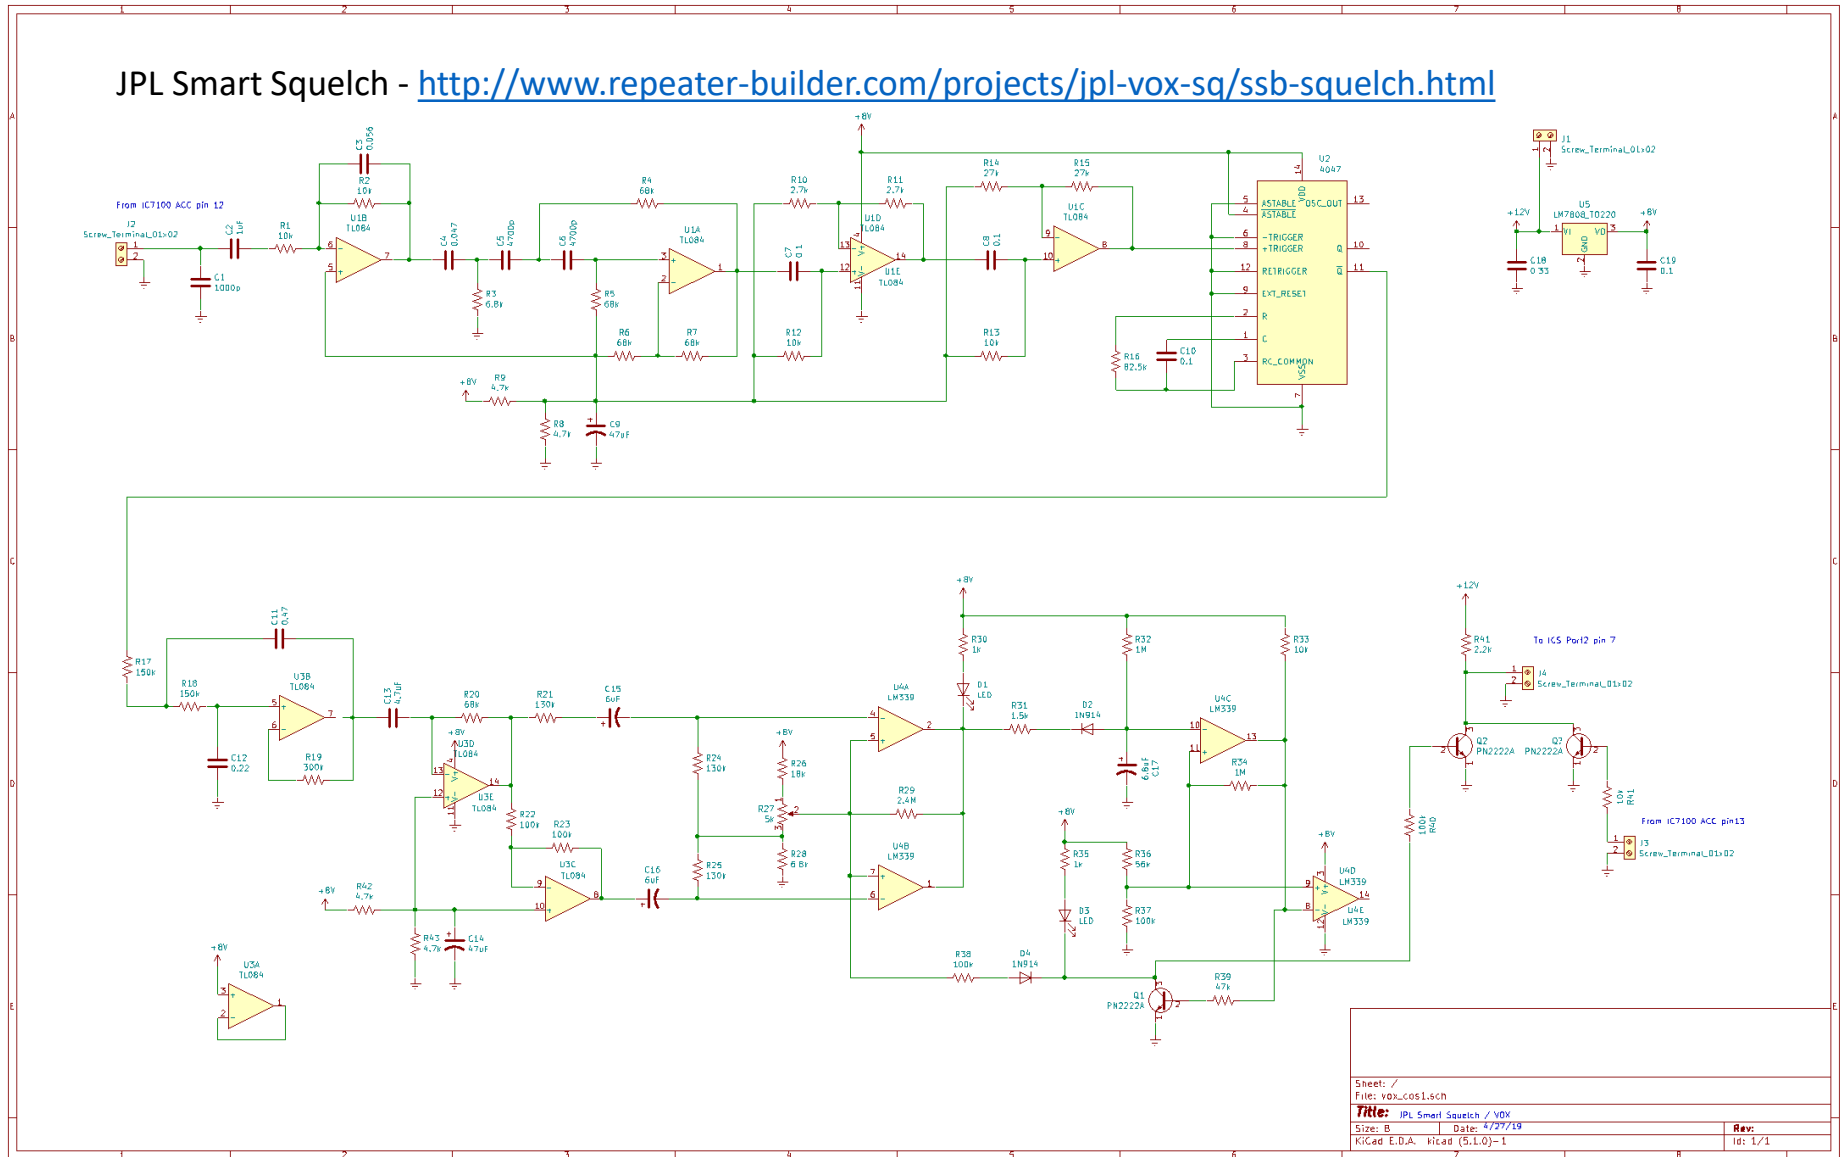
IC-7100 to ICS Controller Wiring 3/26/19

ICS Wire Color	ICS Port 2	IC-7100 ACC Plug
Braid (GND)	9	2 (red)
Red (COS from VS board)	7	
Black (HSEND)	3	3 (orange)
White (MOD)	4	11 (pink)
Green (AF)	5	12 (light blue) + AF to VS board

adduser username grouptoadd
https://www.hostingadvice.com/how-to/linux-add-user-to-group/

dialout is the group for /dev/ttyUSB0

PTTLOCK can be used to disable PTT

set VSEND to off to allow HSEND to control PTT for all freqs

I