

CLAMSHELL HALF -- QTY 2 (identical)

MATERIAL: 0.040" (1.016 mm) aluminum
3003-H14 or 5052-H32 acceptable

CRITICAL (formed):

* 81.51 inside floor width ± 0.20
* 40.25 inside wall depth ± 0.20
bends 90.0 ± 0.5 deg


TOLERANCE: ± 0.4 unless noted
holes DIA 3.40 THRU unless noted

FLOOR HOLES (per flat DXF):


SMA: 1x DIA 4.40 + 4x DIA 2.30
on 8.64 sq pattern (verified)
cap: 2x DIA 3.40 at z=346.5,
 ± 20.38 off centerline
collar: 2x DIA 3.40 at z=7.5,
 ± 26.77 off centerline


FLAT PATTERN: vendor develops
own flat and bend allowances
from formed dimensions on
this sheet.

Deburr all. No scratches across
bend lines on convex faces.

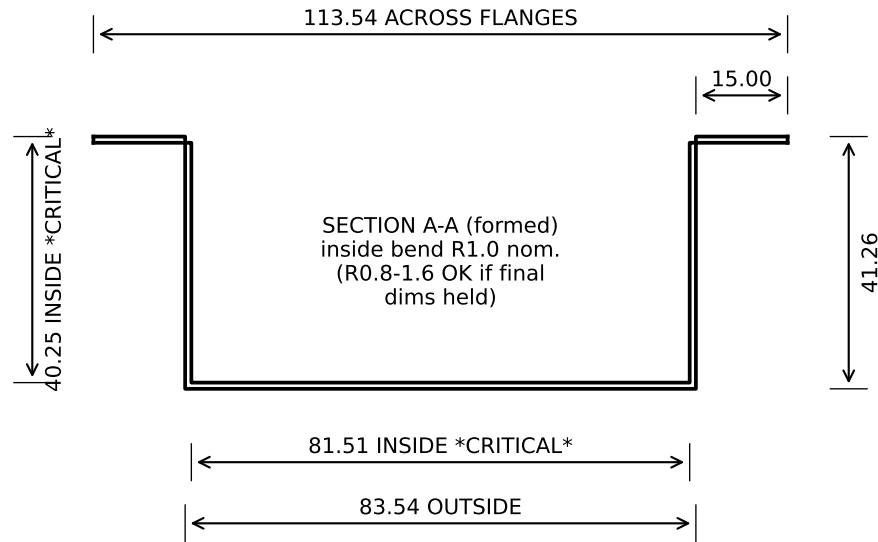

FLANGE RAIL (each of 2): 20x DIA 3.40 THRU, pitch 15.00, first 40.00 from FRONT edge, 7.50 from flange edge

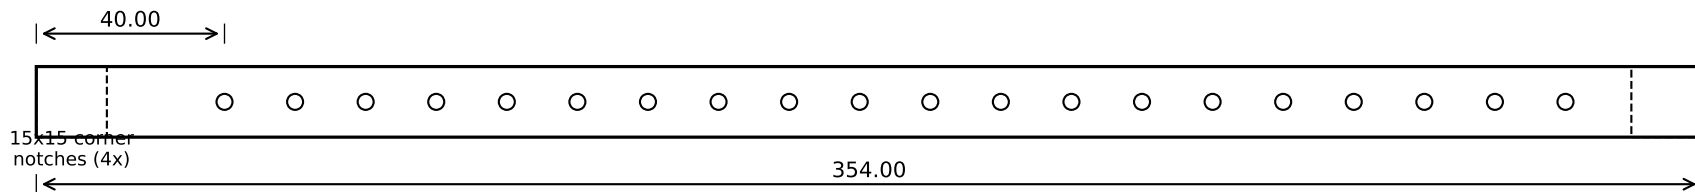

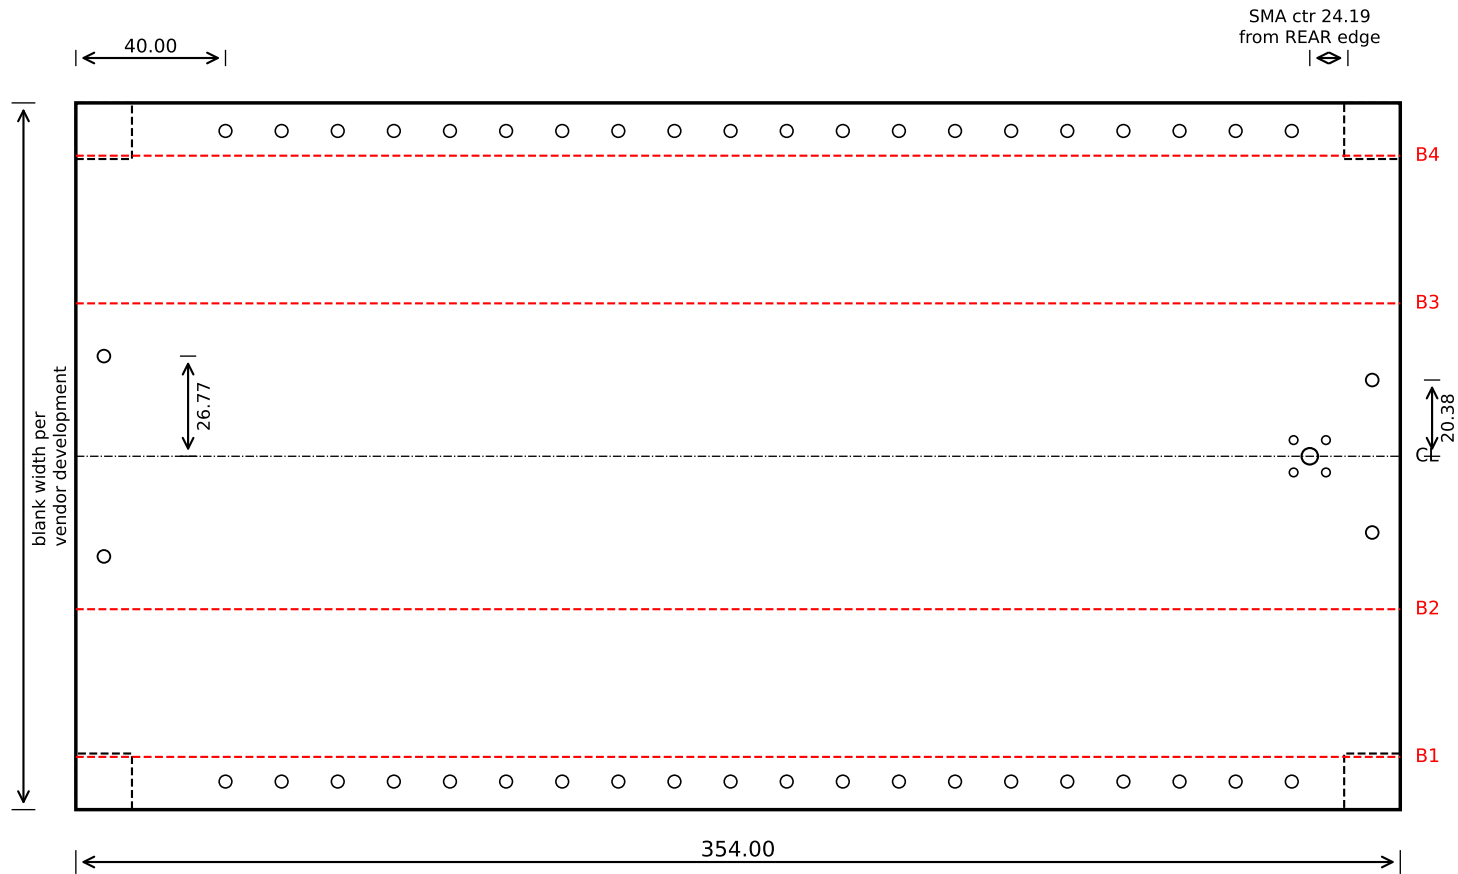


FLAT PATTERN -- REFERENCE ONLY. Formed dimensions (sheet 1) GOVERN; vendor develops own flat and bend allowances.

Bend lines B1-B4 shown SCHEMATICALLY -- positions and blank width per vendor development.

ALL HOLE POSITIONS are development-independent: lengthwise from cut edges (first rail hole 40.00 from FRONT edge, pitch 15.00, 7.50 from long edges); floor group symmetric about blank centerline CL (collar +/-26.77 at 7.50 from FRONT edge; cap +/-20.38 at 7.50 from REAR edge; SMA on CL, 24.19 from REAR edge, 1x DIA 4.40 + 4x DIA 2.30 on 8.64 sq (verified)). Corner notches 15 x 15 (4x).

TOLERANCE: +/-0.4 unless noted

holes DIA 3.40 THRU unless noted

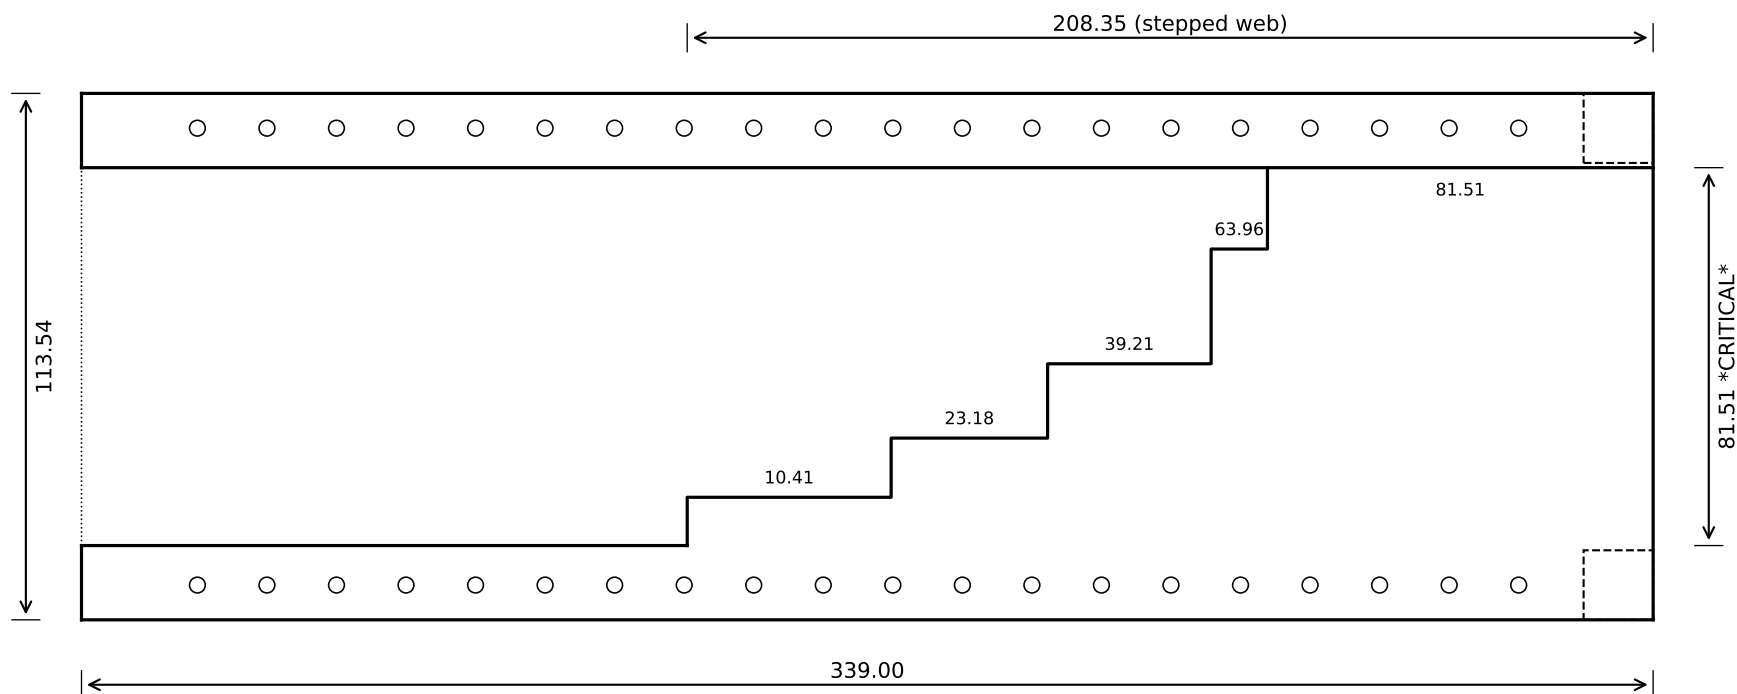

SEPTUM -- QTY 1. FLAT LASER PART, NO BENDS. Profile per supplied DXF (governs over this sketch).

MATERIAL: 0.040" (1.016 mm) aluminum

3003-H14 or 5052-H32 acceptable


CRITICAL: full-height web = 81.51 +0.00/-0.10.

Step heights from bottom rail: 10.41 / 23.18 / 39.21 / 63.96 / 81.51; boundaries from REAR edge: 208.35 / 164.36 / 130.61 / 95.34 / 83.19.

Rails 16.02 wide, full length. Holes: 2 rails x 20x DIA 3.40, pitch 15.00, first 25.00 from FRONT edge, 7.50 from rail edge.

Rear corner notches 15 x 15 (2x). TOLERANCE: +/-0.4 unless noted

holes DIA 3.40 THRU unless noted

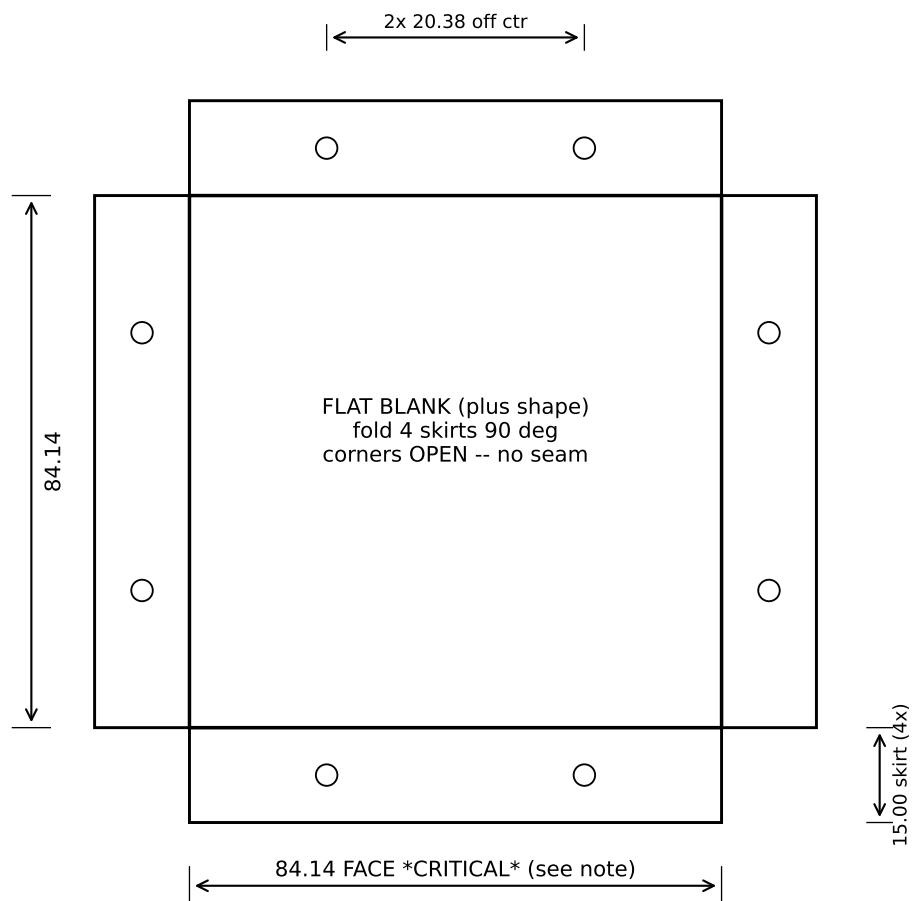

BACKSHORT CAP -- QTY 1


MATERIAL: 0.040" (1.016 mm) aluminum
3003-H14 or 5052-H32 acceptable

FORM: pan, 4x 90 deg bends,
skirt 15.00 deep, corners open.

CRITICAL: inside face-to-face
(between opposite skirts)
84.14 +0.30/-0.00
= slip fit over 83.54 tube.

HOLES: 8x DIA 3.40 (2 per skirt),
7.50 from skirt edge,
+/-20.38 about face center.

TOLERANCE: +/-0.4 unless noted
holes DIA 3.40 THRU unless noted
Deburr all.

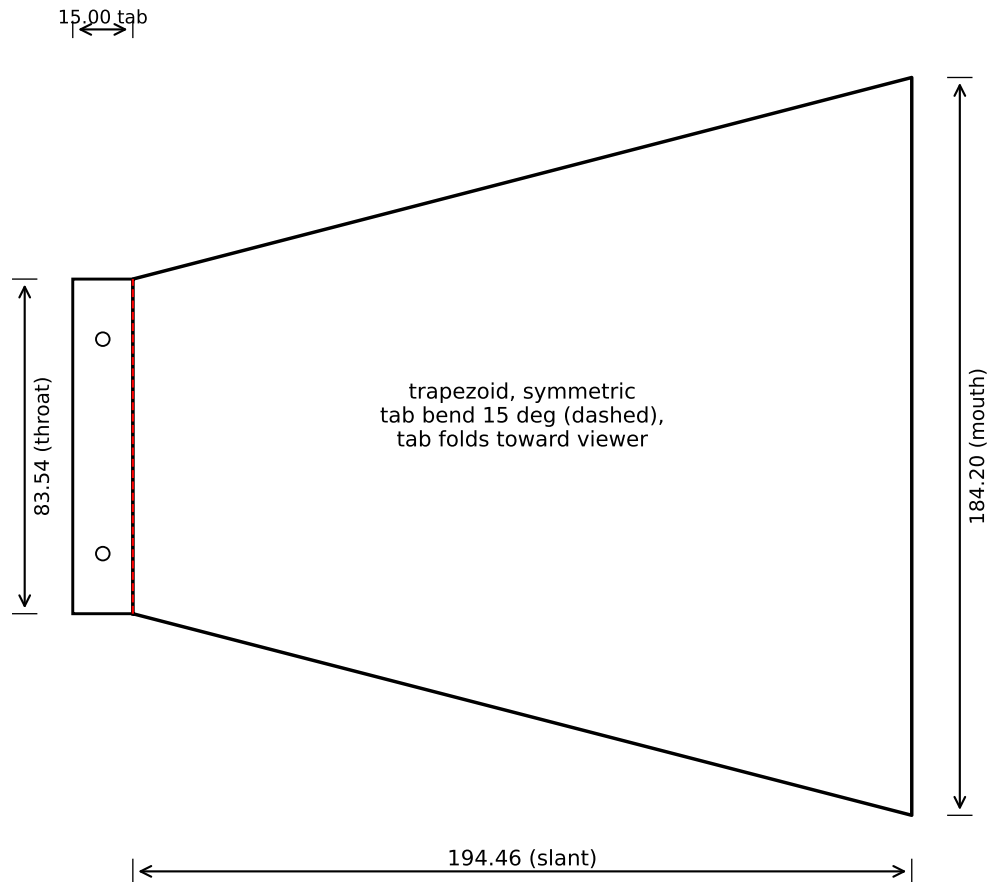

FLARE PANEL -- QTY 4 (identical)


MATERIAL: 0.040" (1.016 mm) aluminum
3003-H14 or 5052-H32 acceptable

FORM: single bend, 15.0 +/-1 deg,
at tab/panel junction
(dihedral 165 deg).

HOLES: 2x DIA 3.40 in tab,
+/-26.77 about centerline,
7.50 from tab edge.

CRITICAL: mouth width 184.20
+/-0.4; symmetry about
centerline +/-0.3.

TOLERANCE: +/-0.4 unless noted
holes DIA 3.40 THRU unless noted

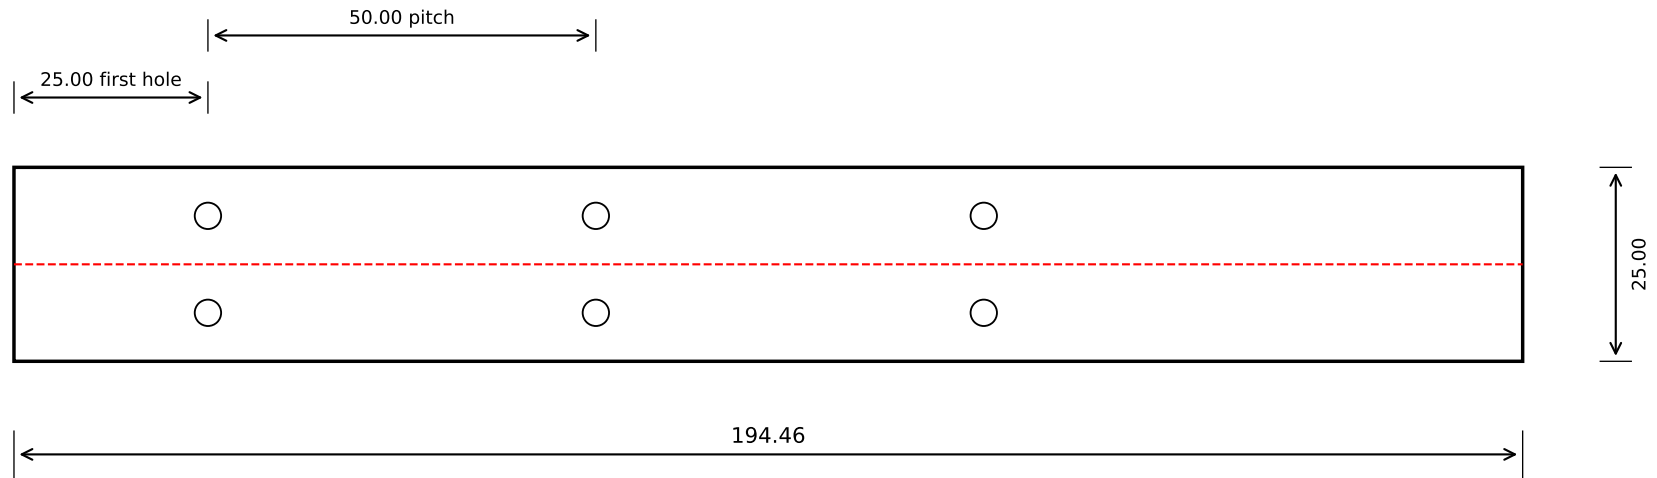

bend 86.16 deg from flat along centerline (dashed) -- pyramid corner dihedral 93.84 deg

CORNER BRACKET -- QTY 4 (identical)

MATERIAL: 0.040" (1.016 mm) aluminum

3003-H14 or 5052-H32 acceptable

FORM: single bend 86.2 +/-1.5 deg along centerline (12.50 from either edge). Loose tolerance -- bracket

HOLES: 6x DIA 3.40 (2 rows at 6.25 / 18.75 from edge; x = 25, 75, 125 from one end).

TOLERANCE: +/-0.4 unless noted

holes DIA 3.40 THRU unless noted