



Ribbit, a distributed digital messaging platform with local redundancy to enhance VHF/UHF communications in regular and emergency situations

Pierre-Emmanuel Deliou W4CKX w4ckx@pekt.org - Open Research Institute
Ahmet Inan inan@aicodix.de - aicodix GmbH



Executive Summary

Ham radio communications on VHF/UHF bands have been dominated by voice communications, which has a low density of information transmitted per spectrum allocated and can be a bottleneck to many conducting regular and emergency communications.

We would like to present Ribbit, a new digital text messaging mode for HF/VHF/UHF simplex and repeater communication, leveraging the computing power, GPS, and touchscreen interface of modern smartphones to enhance the capabilities of a simple HT (Handy Talkie) (or mobile transceiver).


Our growth strategy is as follows:

Ribbit's core focus is to radically transform CRG (Civilian Rescue Groups) communication capabilities, by allowing weekly NETS to shift to text based communication for check-in and traffic, and support valuable new functionalities like data tables to conduct situational assessments reports.

Once embraced by a CRG, the rescue group may elect to deploy a Ribbit node monitoring their repeater frequency. This allows for automated relay of all Ribbit communications to function independently of internet connectivity in times of crisis.

Finally, Ribbit support recreational use of the messaging system for common radio activities like Simplex Ribbit text messaging, Ribbit for SOTA, POTA, and Ribbit Satellite QSOs, as well as being an online message board for conversations and a resource for all radio users.

System Architecture

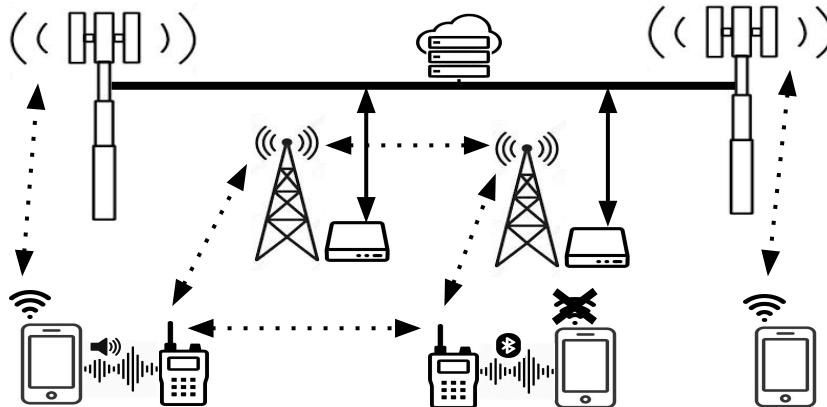

Sending a message via Ribbit

The operator opens the Ribbit application on his smartphone and keeps the smartphone in proximity of the HT.

The Ribbit application constantly listens for Ribbit messages through the microphone of the smartphone and decodes them for storing and displaying, while no audio is kept.

The operator can compose a message. The application will encode it and send the message as audio through the speaker with the objective to be picked up by the HT microphone for transmission while PTT push-to-talk is pressed

Message synchronizations and receipt acknowledgement

The Ribbit app can optionally connect to the Ribbit cloud monitoring application to mark the message as sent. Any other HT or Repeater server receiving the message can also mark the message as received in the cloud application. This allows the operator to see how far the message was transmitted over radio and gives an indication of the expected communication reach.

Local repeater Ribbit message server & data replication

A local Ribbit server listens for Ribbit messages on the repeater input frequency and archive all messages. Upon request by the user, it can resend any past message. On network connectivity, it distributes archived messages to all other reachable servers.

Results

To achieve the goal of transmitting data reliably via acoustic coupling between a smartphone and a Handy Talkie, we are facing ISI (Inter-Symbol Interference) caused by the multipath echo from the environment. By using OFDM (Orthogonal Frequency-Division Multiplexing) multi-carrier modulation we have a very efficient way of dealing with multipath at the expense of a lesser than ideal PAPR (Peak-to-Average Power Ratio) compared to single-carrier systems. By leveraging QPSK (Quadrature Phase-Shift Keying) to modulate the carriers, we are able to slightly manipulate the amplitude of each carrier in order to improve PAPR to the point of making the whole system robust and practical.

Unlike the transmission of voice signals where noise is without consequences, noise in digital signals is usually detrimental and needs to be protected by the use of a FEC (Forward Error Correction) code. We use a strong AH Augmented Hadamard code for the callsign header and systematic polar code for the text payload.

The resulting audio transmission not only survives the path from one smartphone to another with two radios working on AM, FM or SSB in between, but also resists various audio compression methods used in Bluetooth or YouTube audio streams.

Benefits

By leveraging smartphone hardware to work in conjunction with a standard Handy Talkie, we bring the barrier of entry down to zero monetary cost. By increasing the communication capacity by a factor of 10 compared to voice communications, we plan to grow the user base to all radio users.