



SCALE 1:10 - VIEWS IN THIRD-ANGLE PROJECTION

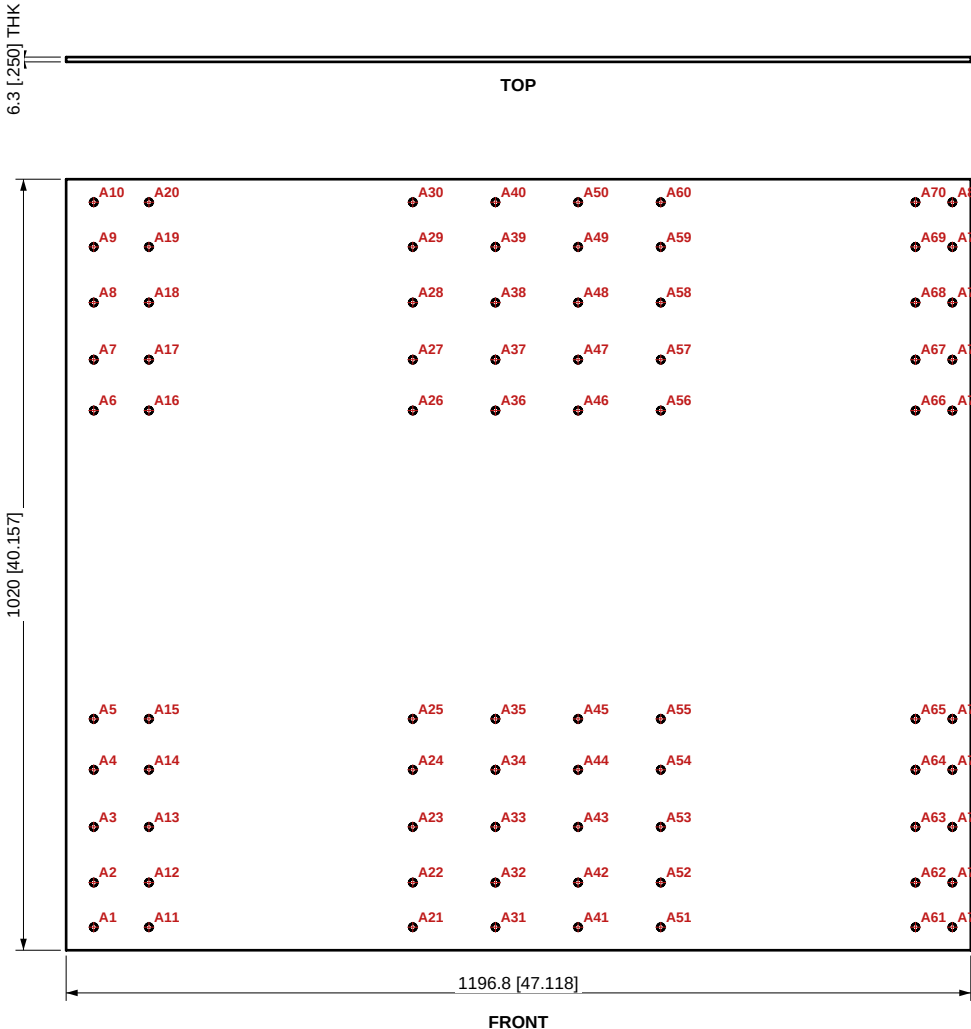

ISOMETRIC VIEW (REF, NOT TO SCALE)

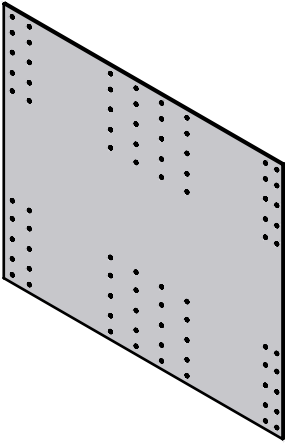

HOLE TABLE

X, Y FROM LOWER-LEFT CORNER OF EACH VIEW

TAG	VIEW	X	Y	SIZE
A1	FRONT	36.5 [1.437]	30.5 [1.200]	Ø9.5 [.375] THRU
A2	FRONT	36.5 [1.437]	89.5 [3.524]	Ø9.5 [.375] THRU
A3	FRONT	36.5 [1.437]	163.2 [6.424]	Ø9.5 [.375] THRU
A4	FRONT	36.5 [1.437]	238.7 [9.399]	Ø9.5 [.375] THRU
A5	FRONT	36.5 [1.437]	306.1 [12.049]	Ø9.5 [.375] THRU
A6	FRONT	36.5 [1.437]	713.9 [28.108]	Ø9.5 [.375] THRU
A7	FRONT	36.5 [1.437]	781.3 [30.758]	Ø9.5 [.375] THRU
A8	FRONT	36.5 [1.437]	856.8 [33.733]	Ø9.5 [.375] THRU
A9	FRONT	36.5 [1.437]	930.5 [36.633]	Ø9.5 [.375] THRU
A10	FRONT	36.5 [1.437]	989.5 [38.957]	Ø9.5 [.375] THRU
A11	FRONT	109.5 [4.311]	30.5 [1.200]	Ø9.5 [.375] THRU
A12	FRONT	109.5 [4.311]	89.5 [3.524]	Ø9.5 [.375] THRU
A13	FRONT	109.5 [4.311]	163.2 [6.424]	Ø9.5 [.375] THRU
A14	FRONT	109.5 [4.311]	238.7 [9.399]	Ø9.5 [.375] THRU
A15	FRONT	109.5 [4.311]	306.1 [12.049]	Ø9.5 [.375] THRU
A16	FRONT	109.5 [4.311]	713.9 [28.108]	Ø9.5 [.375] THRU
A17	FRONT	109.5 [4.311]	781.3 [30.758]	Ø9.5 [.375] THRU
A18	FRONT	109.5 [4.311]	856.8 [33.733]	Ø9.5 [.375] THRU
A19	FRONT	109.5 [4.311]	930.5 [36.633]	Ø9.5 [.375] THRU
A20	FRONT	109.5 [4.311]	989.5 [38.957]	Ø9.5 [.375] THRU
A21	FRONT	458.6 [18.054]	30.5 [1.200]	Ø9.5 [.375] THRU
A22	FRONT	458.6 [18.054]	89.5 [3.524]	Ø9.5 [.375] THRU
A23	FRONT	458.6 [18.054]	163.2 [6.424]	Ø9.5 [.375] THRU
A24	FRONT	458.6 [18.054]	238.7 [9.399]	Ø9.5 [.375] THRU
A25	FRONT	458.6 [18.054]	306.1 [12.049]	Ø9.5 [.375] THRU
A26	FRONT	458.6 [18.054]	713.9 [28.108]	Ø9.5 [.375] THRU
A27	FRONT	458.6 [18.054]	781.3 [30.758]	Ø9.5 [.375] THRU
A28	FRONT	458.6 [18.054]	856.8 [33.733]	Ø9.5 [.375] THRU

NOTES - UNLESS OTHERWISE SPECIFIED

1. DIMENSIONS IN MILLIMETRES [INCHES]. DO NOT SCALE DRAWING.
2. GENERATED FROM THE OPENSAD MODEL. IF THIS SHEET AND THE MODEL DISAGREE, THE MODEL GOVERNS. THE GEOMETRY ID IDENTIFIES THE MODEL VERSION.
3. CUT THE PROFILE FROM generated/dxf/P7_bottom-stiffener-plate.dxf AT 1:1. THIS SHEET IS FOR INSPECTION AND HOLE CHECKING.
4. TOLERANCES: PROFILE AND HOLE POSITION ± 0.8 [± 0.03]; HOLE $\varnothing +0.5/-0$ [$+0.02/-0$].
5. HOLES MARKED DRILL* ARE SMALLER THAN THE PLATE THICKNESS: PLASMA-MARK THE CENTRE ONLY, THEN DRILL TO SIZE.
6. EDGES SQUARE UNLESS NOTED. BREAK SHARP EDGES. MARK THE PART NUMBER ON EACH PIECE.
7. CHECK BEFORE MAKING: THE A6 ANGLE SEGMENTS THAT BOLT TO THIS PLATE ARE DRAWN 200 / 300 / 250 LONG (THEIR PART FILE CANNOT SEE ANGLE_SEGMENT_* IN lifetrac_v25.scad) BUT THIS PLATE'S HOLES ASSUME 146 / 546.8 / 97.6. MATCH-DRILL OR FIX THE MODEL FIRST.

PROJECT					PART NO.				
LIFETRAC v25 - OPEN SOURCE ECOLOGY					P7				
TITLE									
BOTTOM STIFFENER PLATE									
MATERIAL / STOCK					QTY PER MACHINE (COUNTED IN MODEL)				
PL 1/4 [6.35] ASTM A36					1				
PROCESS			FINISH		BLANK SIZE			MASS (CALC)	
CNC PLASMA CUT			REMOVE DROSS, DEBURR; PRIME + PAINT		1196.8 x 1020			60.57 kg	
SCALE	UNITS	3RD ANGLE	SHEET	REV	REV DATE	GEOMETRY ID SHEET SIZE			
1:10	mm [in]		1 OF 2	A	2026-09-25	d57bacba A (LETTER)			
SOURCE (OPENS CAD)						USED IN			
opencad/lifetrac v25.scad : bottom stiffener plate(only="plate")						Base frame, floor			

HOLE TABLE (CONT.)					X, Y FROM LOWER-LEFT CORNER OF EACH VIEW				
TAG	VIEW	X	Y	SIZE					
A29	FRONT	458.6 [18.054]	930.5 [36.633]	Ø9.5 [.375] THRU					
A30	FRONT	458.6 [18.054]	989.5 [38.957]	Ø9.5 [.375] THRU					
A31	FRONT	567.9 [22.359]	30.5 [1.200]	Ø9.5 [.375] THRU					
A32	FRONT	567.9 [22.359]	89.5 [3.524]	Ø9.5 [.375] THRU					
A33	FRONT	567.9 [22.359]	163.2 [6.424]	Ø9.5 [.375] THRU					
A34	FRONT	567.9 [22.359]	238.7 [9.399]	Ø9.5 [.375] THRU					
A35	FRONT	567.9 [22.359]	306.1 [12.049]	Ø9.5 [.375] THRU					
A36	FRONT	567.9 [22.359]	713.9 [28.108]	Ø9.5 [.375] THRU					
A37	FRONT	567.9 [22.359]	781.3 [30.758]	Ø9.5 [.375] THRU					
A38	FRONT	567.9 [22.359]	856.8 [33.733]	Ø9.5 [.375] THRU					
A39	FRONT	567.9 [22.359]	930.5 [36.633]	Ø9.5 [.375] THRU					
A40	FRONT	567.9 [22.359]	989.5 [38.957]	Ø9.5 [.375] THRU					
A41	FRONT	677.3 [26.665]	30.5 [1.200]	Ø9.5 [.375] THRU					
A42	FRONT	677.3 [26.665]	89.5 [3.524]	Ø9.5 [.375] THRU					
A43	FRONT	677.3 [26.665]	163.2 [6.424]	Ø9.5 [.375] THRU					
A44	FRONT	677.3 [26.665]	238.7 [9.399]	Ø9.5 [.375] THRU					
A45	FRONT	677.3 [26.665]	306.1 [12.049]	Ø9.5 [.375] THRU					
A46	FRONT	677.3 [26.665]	713.9 [28.108]	Ø9.5 [.375] THRU					
A47	FRONT	677.3 [26.665]	781.3 [30.758]	Ø9.5 [.375] THRU					
A48	FRONT	677.3 [26.665]	856.8 [33.733]	Ø9.5 [.375] THRU					
A49	FRONT	677.3 [26.665]	930.5 [36.633]	Ø9.5 [.375] THRU					
A50	FRONT	677.3 [26.665]	989.5 [38.957]	Ø9.5 [.375] THRU					
A51	FRONT	786.6 [30.970]	30.5 [1.200]	Ø9.5 [.375] THRU					
A52	FRONT	786.6 [30.970]	89.5 [3.524]	Ø9.5 [.375] THRU					
A53	FRONT	786.6 [30.970]	163.2 [6.424]	Ø9.5 [.375] THRU					
A54	FRONT	786.6 [30.970]	238.7 [9.399]	Ø9.5 [.375] THRU					
A55	FRONT	786.6 [30.970]	306.1 [12.049]	Ø9.5 [.375] THRU					
A56	FRONT	786.6 [30.970]	713.9 [28.108]	Ø9.5 [.375] THRU					
A57	FRONT	786.6 [30.970]	781.3 [30.758]	Ø9.5 [.375] THRU					
A58	FRONT	786.6 [30.970]	856.8 [33.733]	Ø9.5 [.375] THRU					
A59	FRONT	786.6 [30.970]	930.5 [36.633]	Ø9.5 [.375] THRU					
A60	FRONT	786.6 [30.970]	989.5 [38.957]	Ø9.5 [.375] THRU					
A61	FRONT	1123.6 [44.236]	30.5 [1.200]	Ø9.5 [.375] THRU					
A62	FRONT	1123.6 [44.236]	89.5 [3.524]	Ø9.5 [.375] THRU					
A63	FRONT	1123.6 [44.236]	163.2 [6.424]	Ø9.5 [.375] THRU					
A64	FRONT	1123.6 [44.236]	238.7 [9.399]	Ø9.5 [.375] THRU					
A65	FRONT	1123.6 [44.236]	306.1 [12.049]	Ø9.5 [.375] THRU					
A66	FRONT	1123.6 [44.236]	713.9 [28.108]	Ø9.5 [.375] THRU					
A67	FRONT	1123.6 [44.236]	781.3 [30.758]	Ø9.5 [.375] THRU					
A68	FRONT	1123.6 [44.236]	856.8 [33.733]	Ø9.5 [.375] THRU					
A69	FRONT	1123.6 [44.236]	930.5 [36.633]	Ø9.5 [.375] THRU					
A70	FRONT	1123.6 [44.236]	989.5 [38.957]	Ø9.5 [.375] THRU					
A71	FRONT	1172.4 [46.157]	30.5 [1.200]	Ø9.5 [.375] THRU					
A72	FRONT	1172.4 [46.157]	89.5 [3.524]	Ø9.5 [.375] THRU					
A73	FRONT	1172.4 [46.157]	163.2 [6.424]	Ø9.5 [.375] THRU					
A74	FRONT	1172.4 [46.157]	238.7 [9.399]	Ø9.5 [.375] THRU					
A75	FRONT	1172.4 [46.157]	306.1 [12.049]	Ø9.5 [.375] THRU					
A76	FRONT	1172.4 [46.157]	713.9 [28.108]	Ø9.5 [.375] THRU					
A77	FRONT	1172.4 [46.157]	781.3 [30.758]	Ø9.5 [.375] THRU					
A78	FRONT	1172.4 [46.157]	856.8 [33.733]	Ø9.5 [.375] THRU					
A79	FRONT	1172.4 [46.157]	930.5 [36.633]	Ø9.5 [.375] THRU					

HOLE TABLE (CONT.)					X, Y FROM LOWER-LEFT CORNER OF EACH VIEW				
TAG	VIEW	X	Y	SIZE					
A80	FRONT	1172.4 [46.157]	989.5 [38.957]	Ø9.5 [.375] THRU					

NOTES - UNLESS OTHERWISE SPECIFIED

1. DIMENSIONS IN MILLIMETRES [INCHES]. DO NOT SCALE DRAWING.

2. GENERATED FROM THE OPENS CAD MODEL. IF THIS SHEET AND THE MODEL DISAGREE, THE MODEL GOVERNS. THE GEOMETRY ID IDENTIFIES THE MODEL VERSION.

3. CUT THE PROFILE FROM generated/dxf/P7_bottom-stiffener-plate.dxf AT 1:1. THIS SHEET IS FOR INSPECTION AND HOLE CHECKING.

4. TOLERANCES: PROFILE AND HOLE POSITION ±0.8 [±.03]; HOLE Ø +0.5/-0 [+/.02/-0].

5. HOLES MARKED DRILL* ARE SMALLER THAN THE PLATE THICKNESS: PLASMA-MARK THE CENTRE ONLY, THEN DRILL TO SIZE.

6. EDGES SQUARE UNLESS NOTED. BREAK SHARP EDGES. MARK THE PART NUMBER ON EACH PIECE.

7. CHECK BEFORE MAKING: THE A6 ANGLE SEGMENTS THAT BOLT TO THIS PLATE ARE DRAWN 200 / 300 / 250 LONG (THEIR PART FILE CANNOT SEE ANGLE_SEGMENT_* IN lifetrac_v25.scad) BUT THIS PLATE'S HOLES ASSUME 146 / 546.8 / 97.6. MATCH-DRILL OR FIX THE MODEL FIRST.

PROJECT LIFETRAC v25 - OPEN SOURCE ECOLOGY					PART NO. P7		
TITLE BOTTOM STIFFENER PLATE							
MATERIAL / STOCK PL 1/4 [6.35] ASTM A36					QTY PER MACHINE (COUNTED IN MODEL) 1		
PROCESS CNC PLASMA CUT			FINISH REMOVE DROSS, DEBURR; PRIME + PAINT		BLANK SIZE 1196.8 x 1020		MASS (CALC) 60.57 kg
SCALE -	UNITS mm [in]	3RD ANGLE 	SHEET 2 OF 2	REV A	REV DATE 2026-09-25	GEOMETRY ID SHEET SIZE d57bacba A (LETTER)	
SOURCE (OPENS CAD) openscad/lifetrac_v25.scad : bottom_stiffener_plate(only="plate")						USED IN Base frame, floor	