
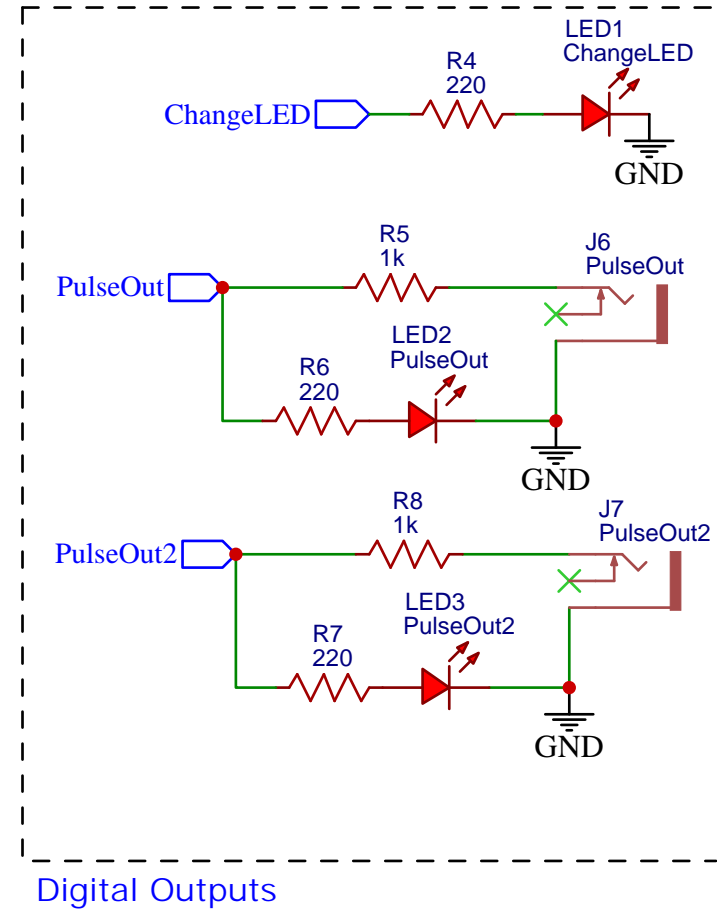
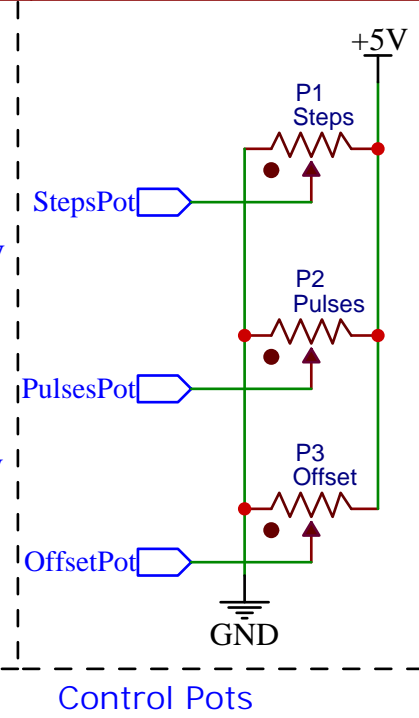
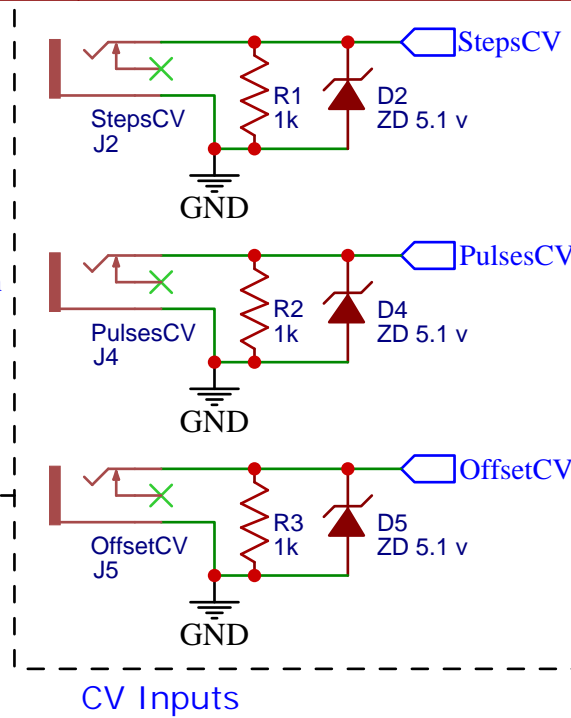
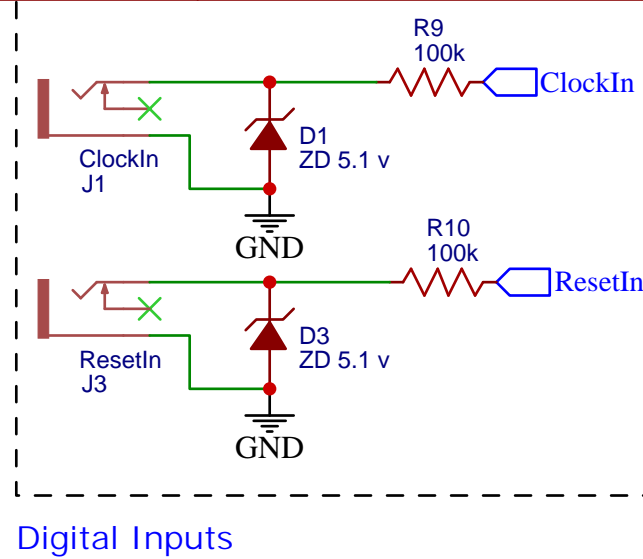


Can be connected to the serial input of an Arduino Uno to debug while the Nano is powered by 12V.
This should be connected to the TX pin. You can use the sendOnlySerial to send serial out to pin 2 to fix this.

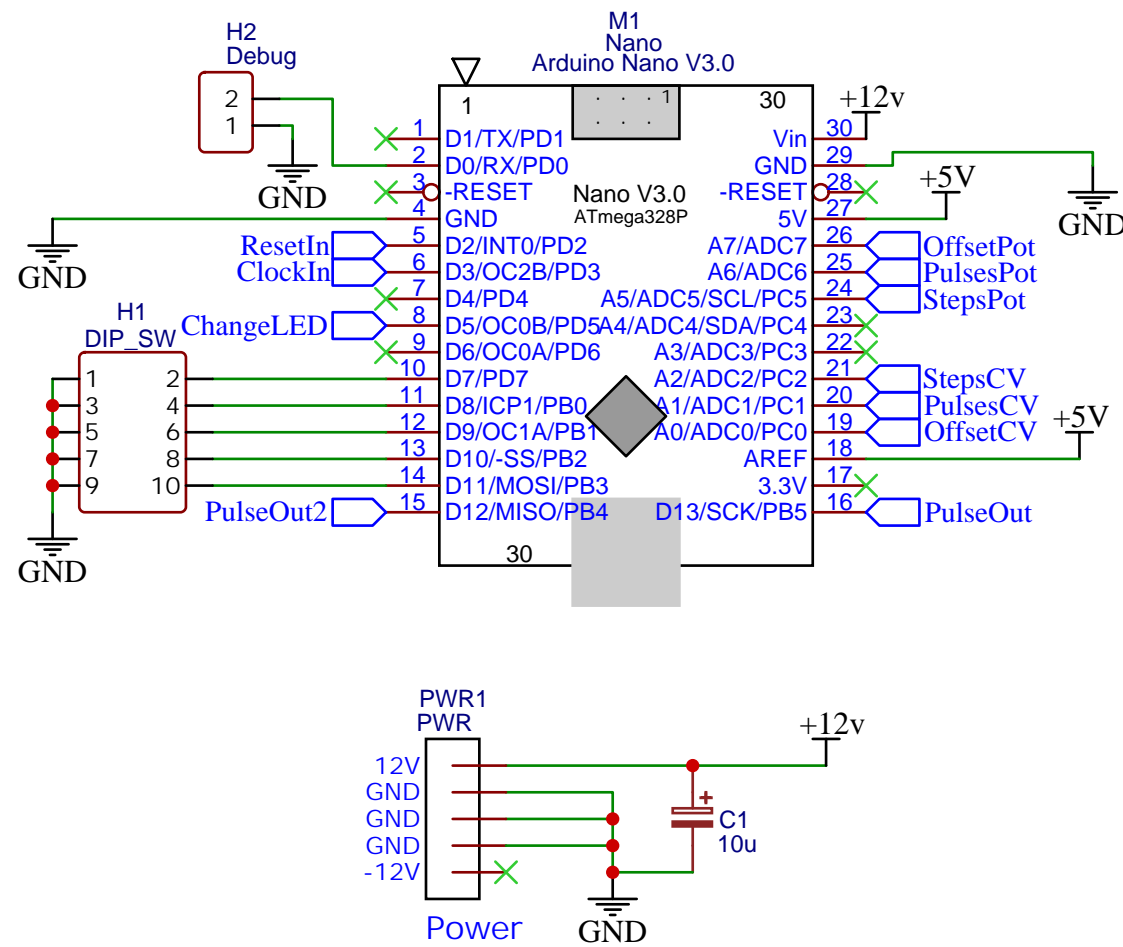

TITLE: 325 BCE Euclidean Pulses		REV: 1.0
Company:		Sheet: 1/1
Date: 2023-02-24		Drawn By: J.A