


3V3 rail must supply >=500 mA peaks (Wi-Fi TX). Place C6 closer to pin 1 than C1.
 SPI is ESP32-C3 SPI2 in slave mode, up to 60 MHz. Keep traces short, length-matched.
 GPIO11-17 not available (in-package flash).

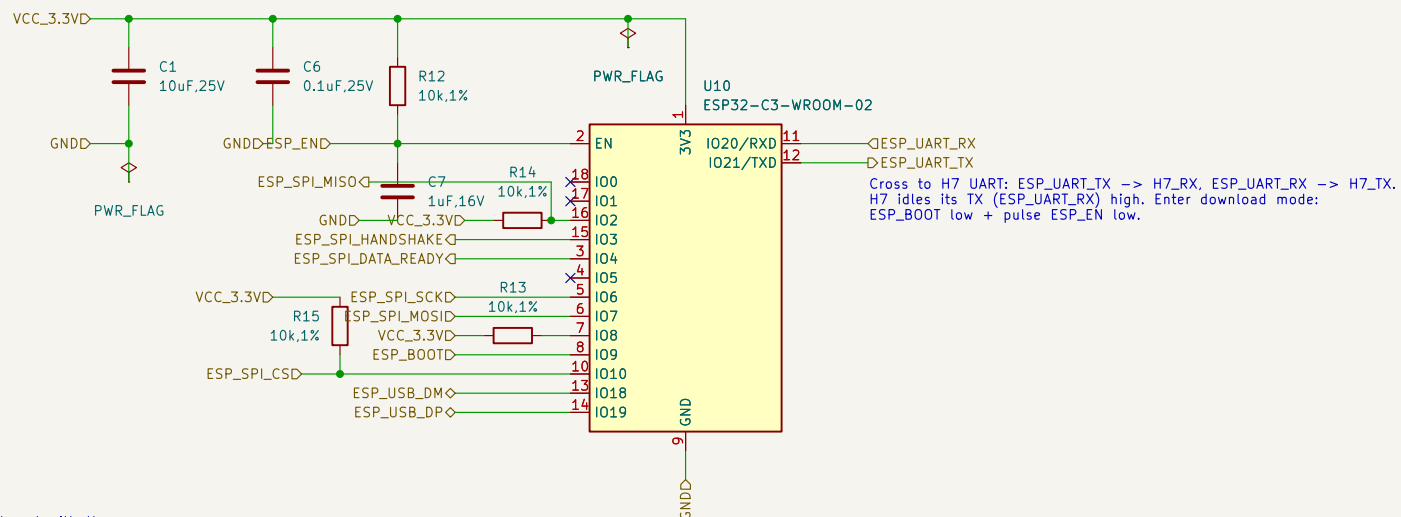

H7 drives open-drain or push-pull-LOW only. EN is shared with the R12/C7 power-on-reset RC, so the H7 must never source current into it (a push-pull high would override the RC delay and fight any pull-down on the net).

Reserved for future USB connector
 (native USB-Serial/JTAG flashing/debug).

HW-SECC-PCB-CTRL
 Prepared by Thomas Liao, Aidan Dorfler
Corzine Lab, University of California, Santa Cruz

Sheet: /
 File: ESP32_COPROC_new.kicad_sch

Title: OpenVWF - SECC Board

Size: USLetter Date: 2026-08-30

KiCad E.D.A. 10.0.3

Rev: A

Id: 1/1